



Staple type: S16 Staples  
**16 GAUGE STAPLES MEDIUM CROWN**  
 Wire Ø: 1.53mm



### Suitable for the following tools\*:


Paslode S200 S16  
 3200/50 S16 PQ  
 4200/50 S16 PQ

*\*please check staple length compatibility with each tool before use*

Staple lengths available: 19mm – 63mm  
 Staples per strip: 70 - 75

### CORROSION PROTECTION

Finish	Usage Environment	Label Colour on Packaging
Zinc Galv 1-3µm	INDOOR 	Blue
Stainless Steel A4 AISI 316 / WNr 1.4401	INDOOR, COVERED OUTDOOR & OUTDOOR 	Yellow

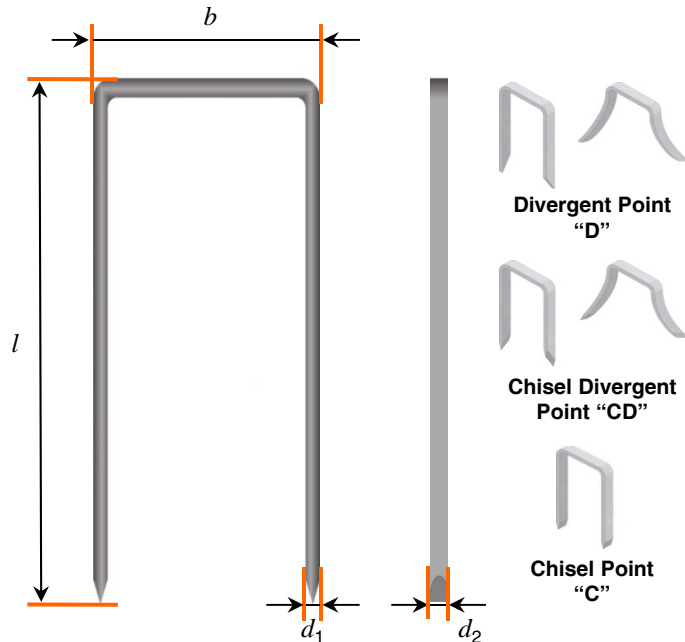

### STAPLE PROPERTIES / DIMENSIONS

Tensile strength of wire:	min 880 N/mm <sup>2</sup>
Nominal diameter ( <i>d</i> ):	1.53mm
Flattened wire dimension:	( <i>d</i> <sub>1</sub> ): 1.30mm ( <i>d</i> <sub>2</sub> ): 1.60mm
Outside crown width ( <i>b</i> ):	13.00mm
Strip length:	approx 120.00mm
Standard point:	“C” / “D” / “CD”
Coated leg length:	“C” = Full “D” & “CD” = Partial

### STAPLE LENGTHS AVAILABLE\*

Finish	Lengths Available <small>*Other lengths on request</small>
Zinc Galv 1-3µm	‘C’ Point: 19mm, 25mm, 28mm, 32mm, 35mm 38mm, 41mm, 45mm, 51mm, 63mm ‘D’ Point: 19mm, 25mm, 38mm ‘CD’ Point: 22mm, 32mm, 44mm
Stainless Steel A4 AISI 316 / WNr 1.4401	38mm, 50mm

Paslode is a brand of the ITW Group. ITW reserves the right to change specification without notice. All design using this data should be carried out by a qualified structural engineer, subject to relevant National and European standards or regulations.