


TO-DELT KULEVENTIL MED FLENSER, TYPE 2019D

TWO-PIECE BALL VALVE WITH FLANGES, TYPE 2019D

VALVULA BILA CU FLANSE, TIP HAITIMA 2019D

ШАРОВОЙ ВЕНТИЛЬ

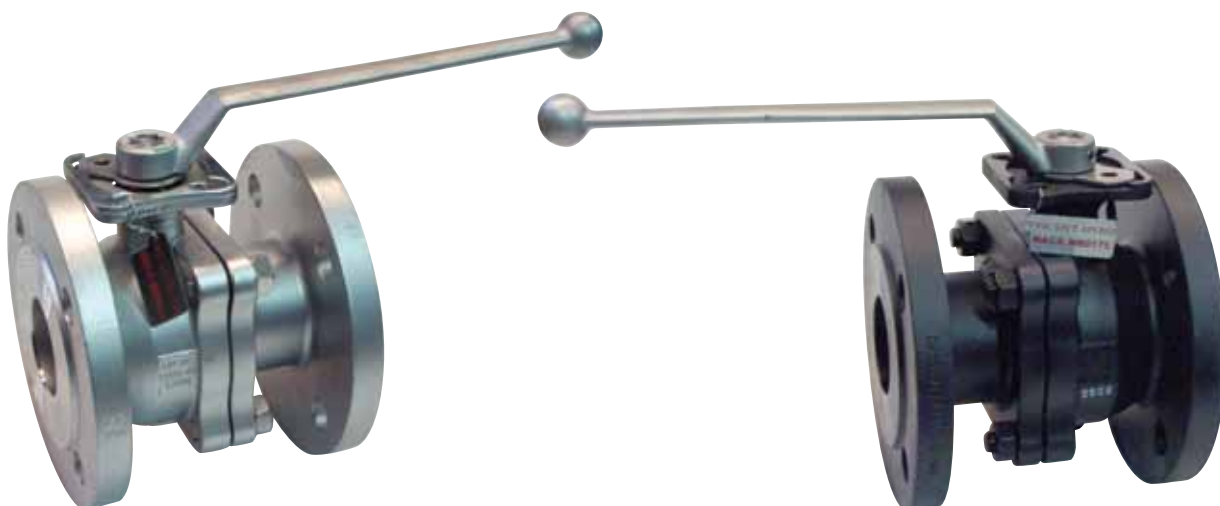

Dimensjoner

DN 15 - DN 200

Trykkklasse

PN 16 / PN 40

ANSI 150LBS (på forespørsel).

Funksjon og konstruksjon

To-delt kuleventil med fullt gjennomløp.
Montasjeflens for aktuator iht. ISO 5211.
Alle dimensjoner leveres med spak.
(gir på forespørsel).
DN 15 - 150 API 607 Fire Safe Sertifisert.
DN 200 Fire Safe Design.

- DNV typegodkjenning
- Utblåsingssikker spindel
- Anti-statisk
- Låsbar spak

Anvendelsesområde

Vann, gasser, trykkluft, noen kjemikalier
petroleumsprodukter, damp.
1.0619 -20°C - 200°C
CF8M -40°C - 200°C

Materialer

1.0619

Hus ASTM A216 - WCB
Kule ASTM A351 - CF8M
Spindel ASTM A276 - 316
Sete CTFE TFM 1600
Pakning Grafitt
Støtte skive CTFE
O-Ring Viton

CF8M

ASTM A351 - CF8M
ASTM A351 - CF8M
ASTM A276 - 316
CTFE TFM 1600
Grafitt
CTFE
Viton

Dimensions

DN 15 - DN 200

Pressure rating

PN 16 / PN 40

ANSI 150LBS (on request).

Features

Two-piece ball valve, full bore.
Mounting pad for actuator acc. to ISO 5211.
All sizes lever operated (gearboxes on request).
DN 15 - 150 API 607 Fire Safe Approved.
DN 200 Fire Safe Design.

- DNV type approval
- Blow-out proof stem
- Anti-static device
- Latch lock lever

Range of application

Water, gas, pressurized air, some chemicals,
petro chemicals, steam.
1.0619 -20°C - 200°C
CF8M -40°C - 200°C

Materials

Body ASTM A216 - WCB
Ball ASTM A351 - CF8M
Stem ASTM A276 - 316
Seat CTFE TFM 1600
Packing Graphite
Thrust Washer CTFE
O-Ring Viton



1.0619

ASTM A216 - WCB
ASTM A351 - CF8M
ASTM A276 - 316
CTFE TFM 1600
Graphite
CTFE
Viton

CF8M

ASTM A351 - CF8M
ASTM A351 - CF8M
ASTM A276 - 316
CTFE TFM 1600
Graphite
CTFE
Viton

PRESSURE-TEMPERATURE RATING

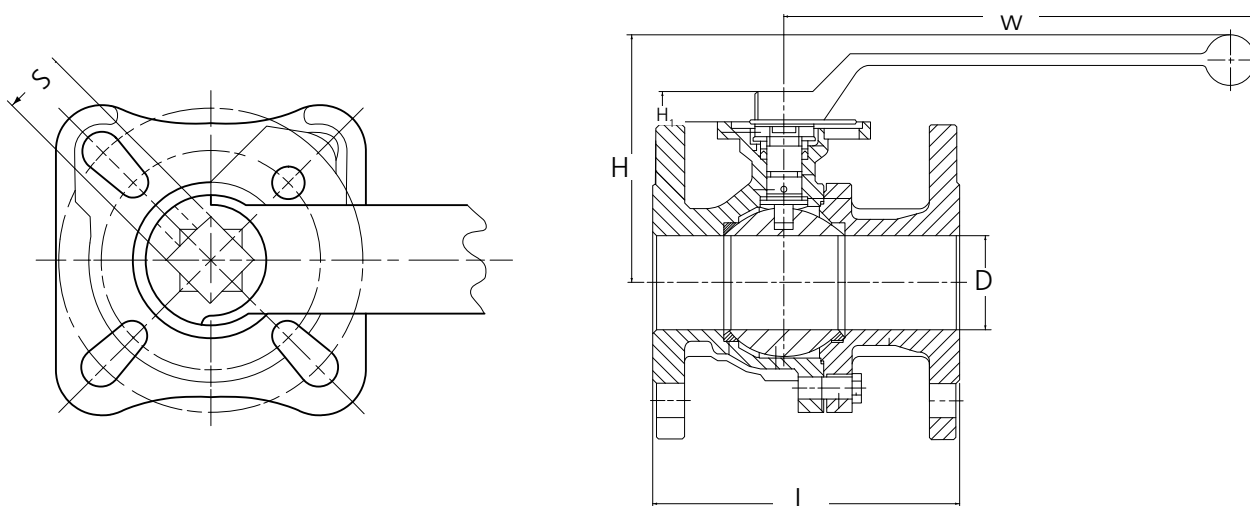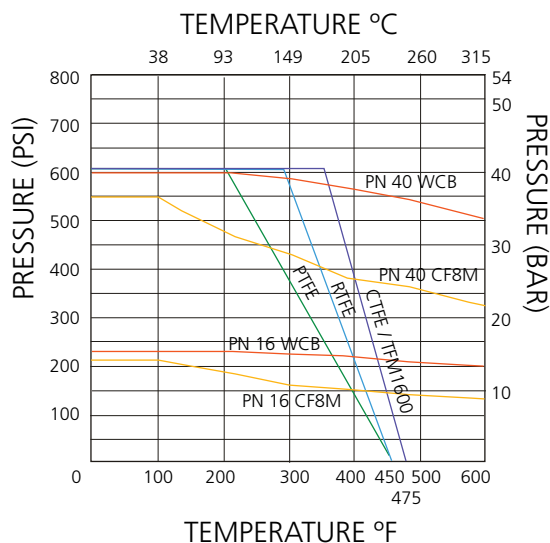

1.0619

CF8M

HS Code 8481.4092	HS Code 8481.4091
HS Code Int. 8481.40	HS Code Int. 8481.40

2019D DIN PN 16/40

5
253

MÅLTABELL MEASUREMENTS AND PART NO'S

DN	D	L	PN 40	Flens/Flange	H	W	ISO 5211	S	H ₁	Torque / Nm		KG	Matr. 1.0619 NRF nr./Part No.	Matr. 316/CF8M NRF nr./Part No.
										Action	Breakaway			
15	15	115	40	65	86,5	197	F03/F04	9	8,5	3,0	5,2	2,20	5600231	5600243
20	20	120	40	75	89	197	F03/F04	9	8,5	4,7	8,0	2,80	5600232	5600244
25	24	125	40	85	93	197	F04/F05	11	11	9,0	12,5	3,64	5600233	5600245
32	30	130	40	100	106	197	F04/F05	11	11	8,5	12,0	5,30	5600234	5600246
40	38	140	40	110	121	247	F05/F07	14	15	18,0	24,5	6,63	5600235	5600247
50	50	150	40	125	129	247	F05/F07	14	15	23,0	32,0	9,38	5600236	5600248
65	64	170	40	145	158	340	F07/F10	17	22	33,8	40,2	13,75	5600237	5600249
80	76	180	40	160	166	340	F07/F10	17	22	73,1	85,3	17,93	5600238	5600251
100	100	190	40	190	189	340	F10/F12	22	24	73,3	95,7	23,6	5600239	5600252
125	125	325	40	220	263	392	F10/F12	27	28	100,0	160,0	47,00	5600241	5600253
150	150	350	40	250	328	756	F10/F12	27	28	150,0	212,0	74,50	5600242	5600254
65	64	170	16	145	158	340	F07/F10	17	22	28,0	50,0	13,75	5600255	5600262
80	76	180	16	160	166	340	F07/F10	17	22	35,0	70,0	17,93	5600256	5600263
100	100	190	16	180	189	340	F10/F12	22	24	45,0	85,0	23,60	5600257	5600264
125	125	325	16	210	263	392	F10/F12	27	28	100,0	160,0	43,00	5600258	5600265
150	150	350	16	240	328	756	F10/F12	27	28	150,0	212,0	67,00	5600259	5600266
*200	200	400	16	295	343	863	F14	36	36	350,0	470,0	104,00	5600261	5600267

* GIR FOR 2019 D, NRF NR. 5600269 GEAR FOR 2019 D, PART NO. 5600269