



YTELSESERKLÆRING

DECLARATION OF PERFORMANCE

in accordance with EU Construction Products Regulation (CPR) No 305/2011
and Commission Delegated Regulation (EU) No 574/2014

No.: DoP-NO-Leca_1/5_TIL

Revisjon 4 / *Revision 4*

1. ENTYDIG IDENTIFIKASJONSKODE / *UNIQUE IDENTIFICATION CODE:*

Leca® Lettklinker 1/5

2. TILSIKTET BRUKSOMRÅDER / *INTENDED USES:*

Lette tilslag for betong, mørtel og injiseringsmasser / *Lightweight aggregates for concrete, mortar and grout*

3. PRODUSENT / *MANUFACTURER:*

Leca Norge AS,
Årnesvegen 1,
2009 Nordby, Norway

Phone: +47 414 37 100

E-mail: info@leca.no

Web: www.leca.no

4. GODKJENT REPRESENTANT / *AUTHORISED REPRESENTATIVE:*

Ikke relevant / *Not applicable*

5. SYSTEM FOR YTELSESKONTROLL / *SYSTEM FOR VERIFICATION:*

AVCP system 2+

6. UTSTEDT EUROPEISK TEKNISK VURDERING / *ISSUED DECLARATION OF PERFORMANCE FOR EUROPEAN TECHNICAL ASSESSMENT:*

Ikke relevant / *Not applicable*

7. HARMONISERT STANDARD ELLER EAD / *HARMONIZED STANDARD OR EAD:*

EN 13055-1:2002, EN 13055-1:2002/AC:2004

Teknisk kontrollorgan / *Notified body*: No. 1111 – Kontrollrådet

8. ANGITTE YTELSER / DECLARED PERFORMANCES:

Vesentlige egenskaper / Essential characteristics		Ytelse / Performance
Partikkel form / <i>Particle shape</i>		Rund / <i>Round</i>
Partikkelstørrelse / <i>Particle size</i>	Kornstørrelse / <i>Aggregate size</i>	1/5 mm
	Gradering / <i>Grading</i>	NPD ^{a)}
Løs bulkdensitet / <i>Loose bulk density</i>		370 kg/m ³ ± 15 %
Andel knust materiale / <i>Percentage of crushed particles</i>		NPD ^{a)}
Renhet / <i>Cleanliness</i>		NPD ^{a)}
Knusemotstand / <i>Resistance to fragmentation/crushing</i>		2 N/mm ² ± 0,3 N/mm ²
Sammensetning/innhold <i>Composition/content</i>	Klorider / <i>Chloride</i>	≤ 0,02 %
	Syreløselig sulfat / <i>Acid soluble sulfate</i>	≤ 0,01 % SO ₃
	Totalt svovel / <i>Total sulfur</i>	≤ 0,02 % S
Volumstabilitet / <i>Volume stability</i>		Beständig ifølge lang tids erfaring / <i>Durable according to long term experience</i>
Vannoppsug / <i>Water absorption</i>		NPD ^{a)}
Radioaktiv emisjon / <i>Emission of radioactivity</i>		NPD ^{a)}
Utlekking av tungmetaller / <i>Release of heavy metals</i>		NPD ^{a)}
Utlekking av polyaromatiske hydrokarboner / <i>Release of polyaromatic hydrocarbons</i>		NPD ^{a)}
Utlekking av farlige stoffer / <i>Release of other dangerous substances</i>		NPD ^{a)}
Bestandighet ved frysing/tinging / <i>Durability against freeze/thaw</i>		Beständig ifølge lang tids erfaring / <i>Durable according to long term experience in Nordic climate</i>
Bestandighet ved alkali-kisel reaktivitet / <i>Durability against alkali-silica reactivity</i>		Beständig ifølge lang tids erfaring / <i>Durable according to long term experience</i>

a) NPD = Ytelse ikke bestemt / *NPD = No Performance Determined*


Ytelsen for produktet, er i samsvar med de angitte ytelsene i de gjeldende i punktene. Ytelseserklæringen er utstedt på produsentens eget ansvar, som angitt, i henhold til EU-regulativ No 305/2011.

Undertegnet for og på vegne av produsenten av:

The performance of the product, is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified.

Signed for and on behalf of the manufacturer by:

Bjørn Erik Busch,
Fabrikksjef Leca Rælingen
Factory manager Leca Rælingen
(Rælingen, NO, 05/10/2022)

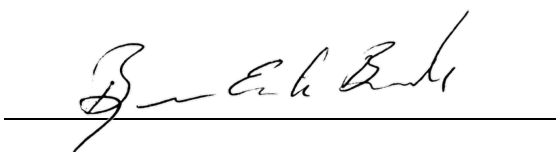



1111

Leca Norge AS
Årnesvegen 1
N-2009 Nordby
Norway

16

DoP-NO-Leca_1/5_TIL

EN 13055-1

Leca® Lettklinker 1/5

Intended use(s):

Lightweight aggregates for concrete,
mortar and grout

Bulk density: 370 kg/m³

For detailed of properties, see Declaration
of Performance (DoP) available on:
www.leca.no