

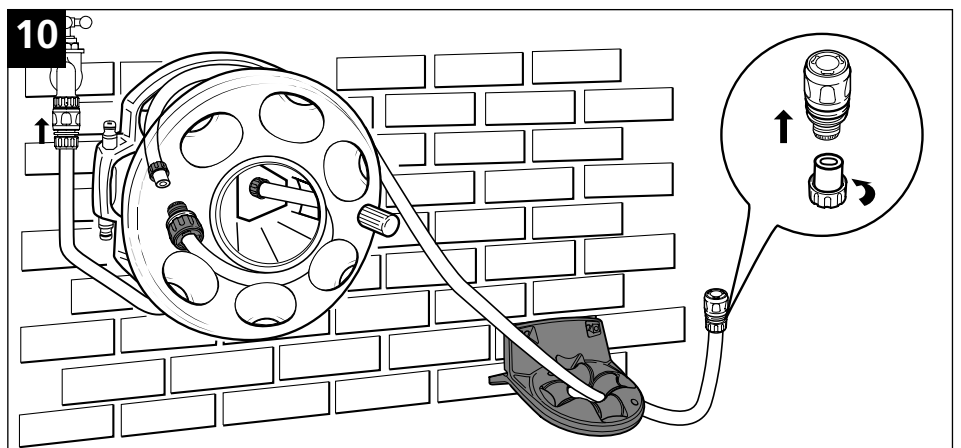
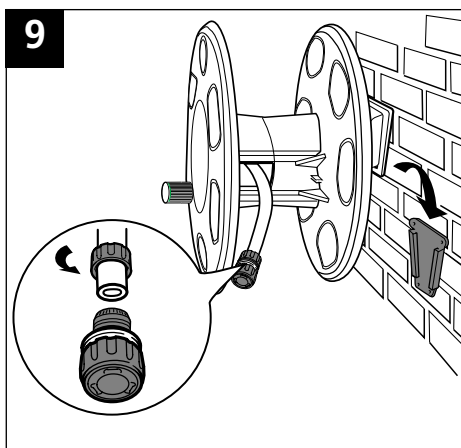
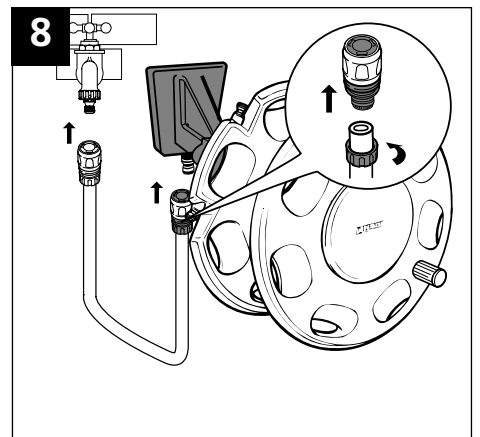
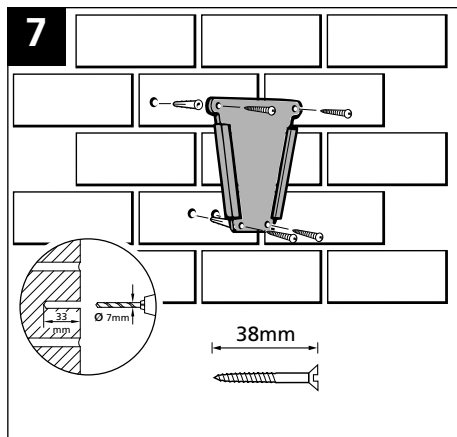
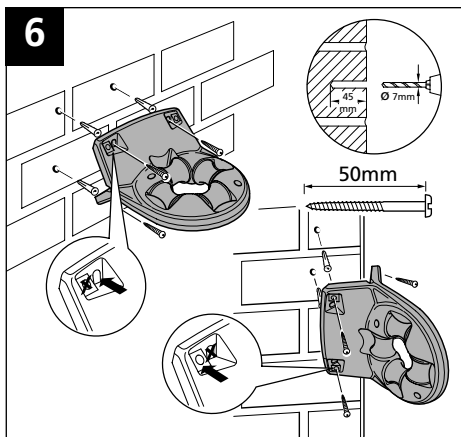
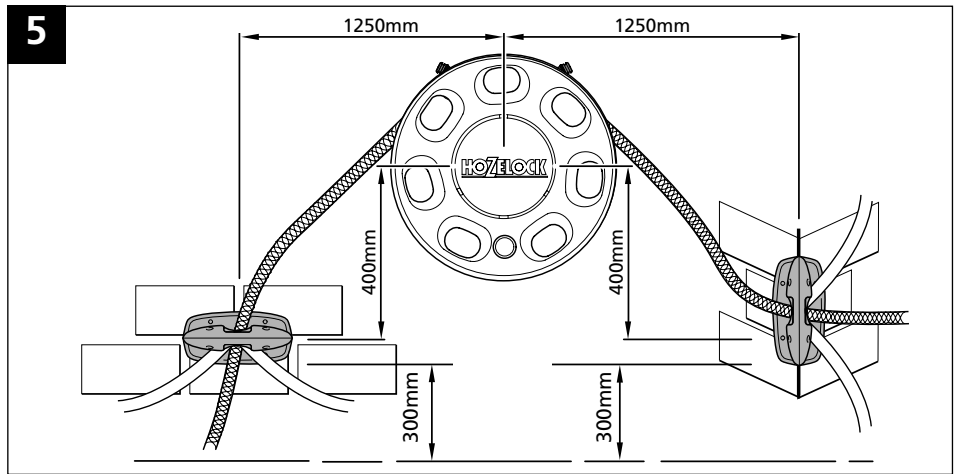
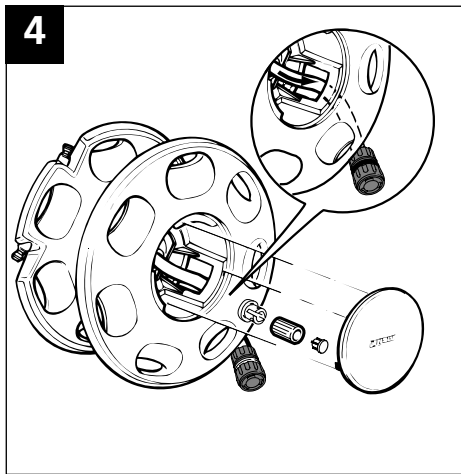
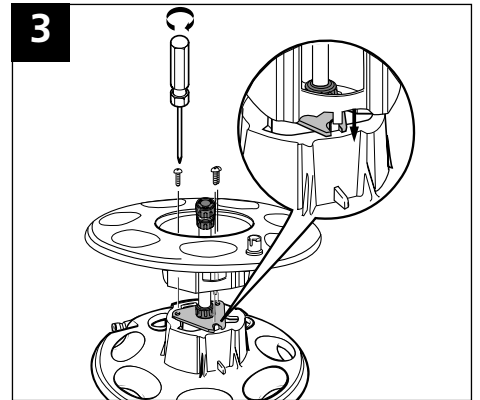


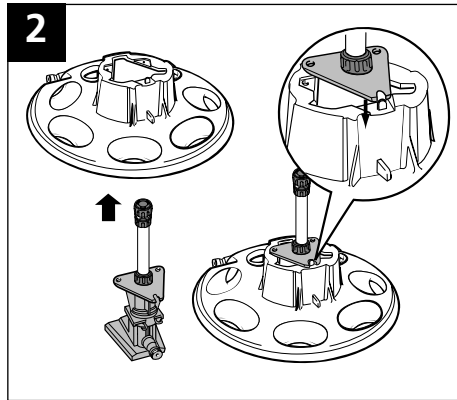



Wall Mounted Hose Reel: Assembly Instructions

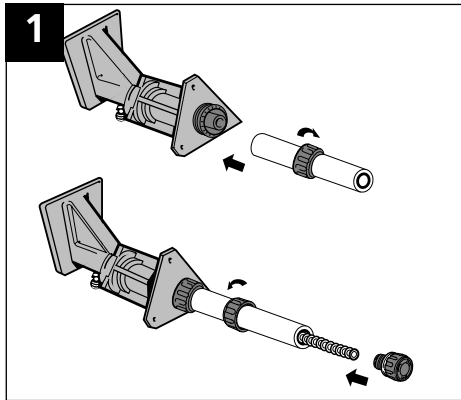

Maintenance

- Remove reel from wall.
- Pull out spring clip, remove plastic wall bracket, then plastic bearing
- Apply to outside of bearing with Silicone grease. Replace seals if required
- Reassemble in reverse order

To make winding easier, and maximise water flow – run water through hose before winding onto drum.

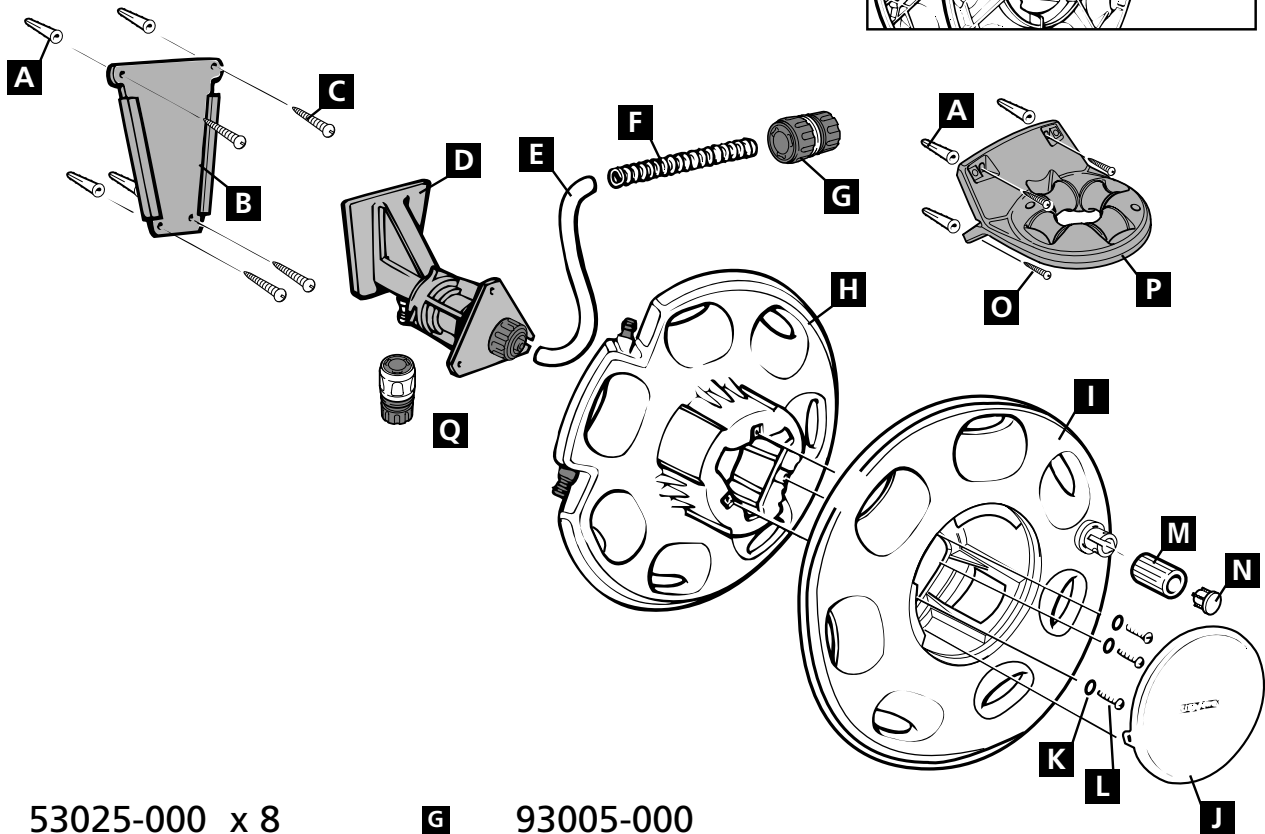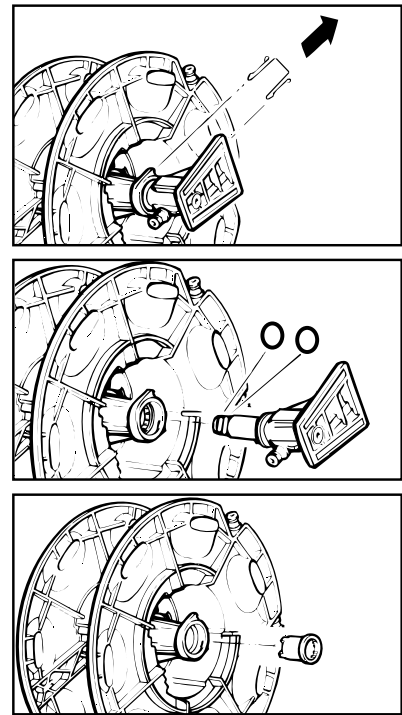

A 53025-000 x 8

B 51606-000

C 53023-000 x 4

D 93221-000

E 93404-000

F 53015-000

G 93005-000

H 83287-440

I 83288-440

J 83289-440

K 53022-000 x 3

L 53027-000 x 3

M 83204-440

N 83205-440

O 53024-000 x 4

P 93264-000

Q 93085-000

Hozelock Ltd.
Haddenham, Aylesbury, Bucks. HP17 8JD

Tel: 01844 292002
Fax: 01844 290344

www.hozelock.com

45784-000

HOZELOCK