




For manually use



Easy bench-vice fixing

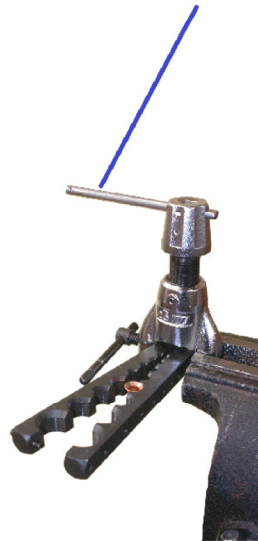

With 3/8" bit mounted in handle FTE-800 can be used with wrench or power tool



- Precision flaring tool for smooth, high strength flares.
- Large removable feed screw handle allows flaring with a minimum of effort.
- Eccentric placed hardened steel finished cone rolls out perfect 45° flares and automatically burnishes flare face.
- Original wall thickness is maintained at base of flare.
- Can be used on aluminium and/or soft copper.
- Feed screw handle with torque limitation avoids "overflaring". When correct flare has been produced, the feed screw mechanism of the yoke will be cut out mechanically.
- 3/8" square drive allows operation with a ratchet wrench or power tool.