



Declaration of Performance

DoP-No. 539506000

- | | |
|---|--|
| 1. Product name | Trans Clear |
| 2. Type of product | 1 component MS hybrid polymer |
| 3. Application | Sealant for the application in facades
Type F INT
Conditioning: Method B
Substrate: anodised aluminium and grout M1
Pre-treatment with Adhesion Promoter |
| 4. Manufacturer | Novatech International NV
Industrielaan 5 B
BE-2250 Olen
T. +32 14 85 97 37
F. +32 15 85 97 38
E. info@tec7.com |
| 5. Representative | not applicable |
| 6. System of assessment of constancy of performance | 3 plus 3 |
| 7. Harmonised Standard | EN 15651-1: 2012-12 |
| 8. Notified body | ift Rosenheim GmbH, NB 0757, as notified laboratory in system 3, performed the initial test and issued the test report. |




9. Essential characteristics

Essential characteristics	Performance	Harmonised technical specification
Reaction to fire	Class E	EN 15651-1: 2012-12
Release of chemicals dangerous to the environment and health	evaluated	
Water tightness and air tightness		
a) Resistance to flow	≤ 5 mm	
b) Loss of volume	≤ 45 %	
c) Tensile properties at maintained extension after water immersion	NPD	
d) Tensile properties at maintained extension	NPD	
e) Tensile properties at maintained extension at -30°C	NPD	
f) Tensile properties (secant modulus / elongation at break)	≥ 25 %	
g) Tensile properties (secant modulus) at -30°C	NPD	
h) Durability	pass	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

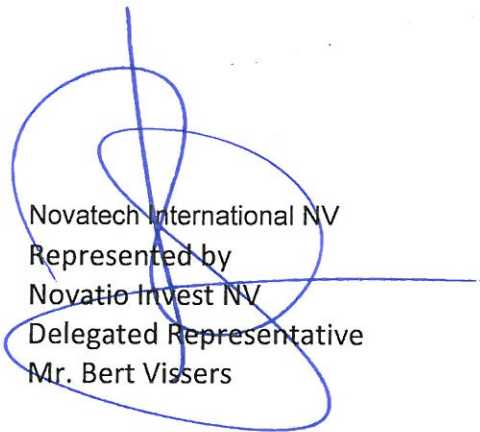

Novatech International NV
 Represented by
 Novatio Invest NV
 Delegated Representative
 Mr. Bert Vissers

Olen, 13 June 2016