



TECHNICAL DATA SHEET

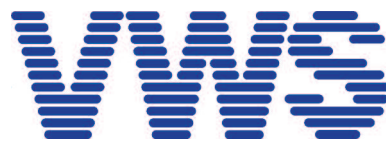

VWS Befestigungstechnik GmbH
Siemensstraße 2
D - 72805 Lichtenstein/Württemberg
Tel.: 00 49 (0) 71 29 / 6 95 - 1 00
Fax: 00 49 (0) 71 29 / 6 95 - 1 50
www.vws.de

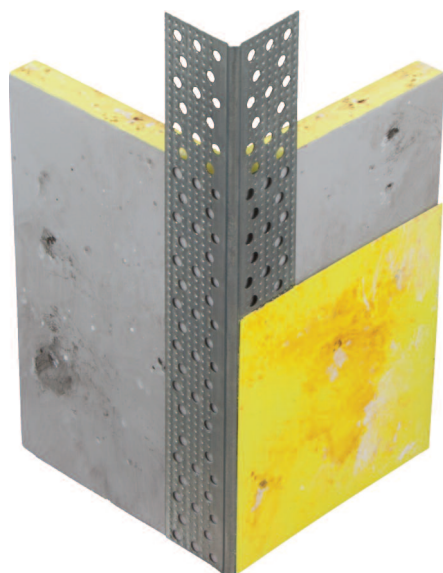

page	1/1
as of	07.2012
revision	-

0305

**corner bead
with pixel
galvanised steel
30 x 30 mm
12.5 mm plasterboard
1 mm gypsum
25 pieces
2.5 / 3.0 m**



Application: dry-lining

Corner beads are used in the dry-lining at putty works in connection with plasterboards. They make up for establishing of exact and vertically oriented edges. The corner profile must be sealed holohedral to the middle of the plasterboard to obtain a smoothly transition from the profile to the plasterboard.

Equipment of the product:

Profile out of pixelated galvanised steel with extraction and bilateral press cut

Important details:

Dry storage

Horizontal transporting and stocking

By application of galvanised profiles you have to allow for the instruction sheet for the design and use of metal plaster and render beads of the Technical Committee of Plaster Bead Manufacturers.

All details complies the up-to date our knowledge and experience. Our information characterise simply the character our products and don't account for contractual legal relationship. They don't absolve the customer from verifying our products to their applicability for the contemplated usage on their own. We reserve the right for changing due to technical or planning laws. Product-drawings on this sheet aren't true to scale. With publishing this technical data sheet are all back issues invalid. You can find the latest issue of the technical data sheets of our assortment at <http://www.vws.de/tmb/en>. The stand of the revision is essential for the use of the products at the date of mounting. Printed versions could differ from the effectual stand of revision.