



Paslode[®]
Impulse[®]

IM90Ci - IM100Ci





Paslode
Impulse



= 1250
(-5°C)



IM90Ci
Ø 2.5 ▶ 3.1 mm
L = 50 ▶ 90 mm (Smooth & Ring)
RoundDrive®
34°

IM100Ci
Ø 2.8 ▶ 3.4 mm
L = 63 mm Ring ▶ 98 mm Uniloc
▶ 100 mm Smooth
RoundDrive®
34°



Paslode
Impulse



= 7500 max



15 mn = 2500 max
30 mn = 6000 max
60 mn = 7500 max
2 mn = 200

=
 =

100%
 75%
 50%
 25%

0 → 300







BANG!









- 15 °C ➔ + 49 °C

IM90Ci/IM100Ci : 1000/hour
IM90Ci : 4000/day
IM100Ci : 3000/day

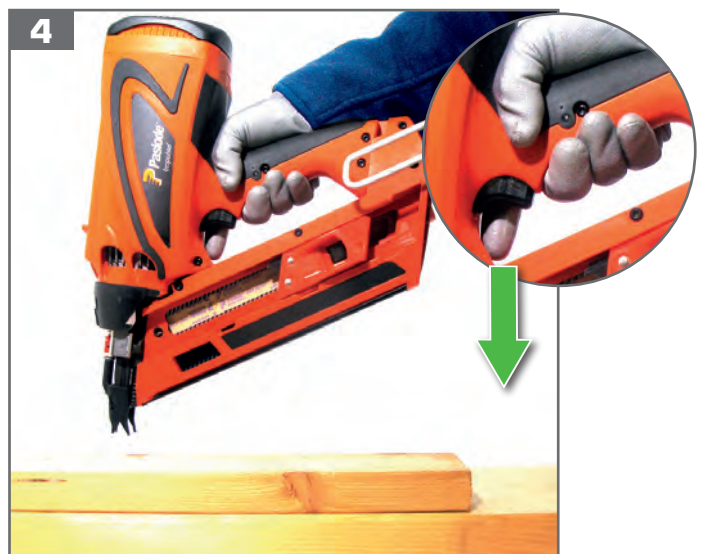









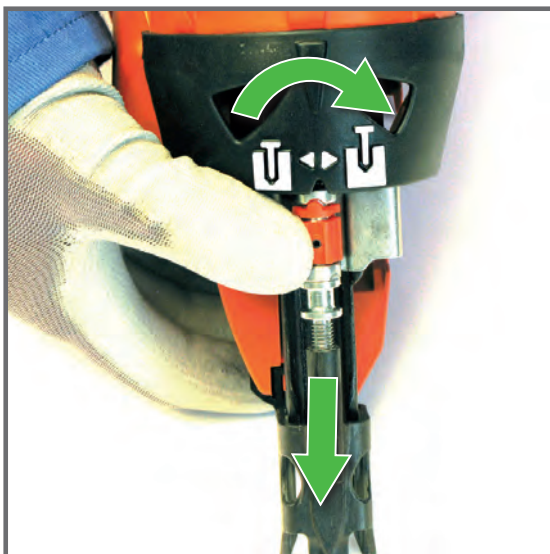
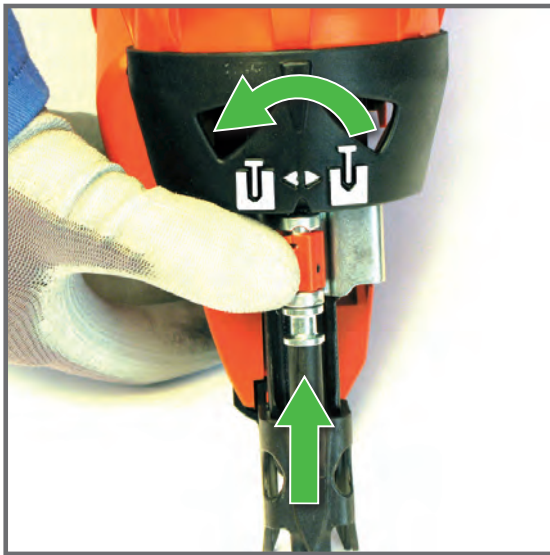



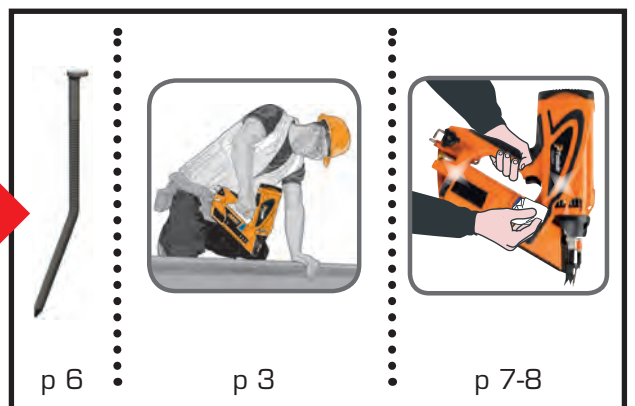
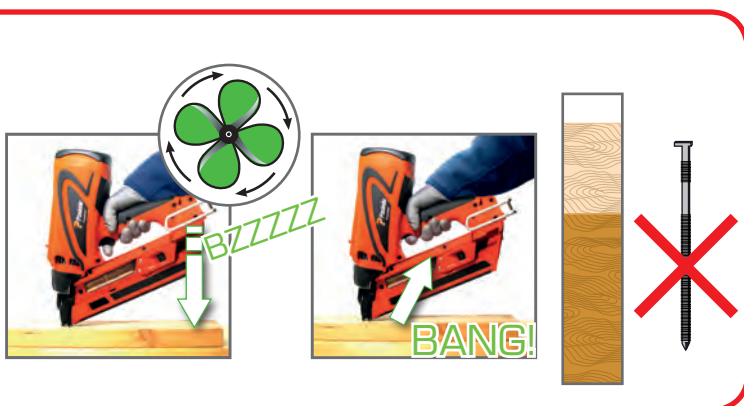
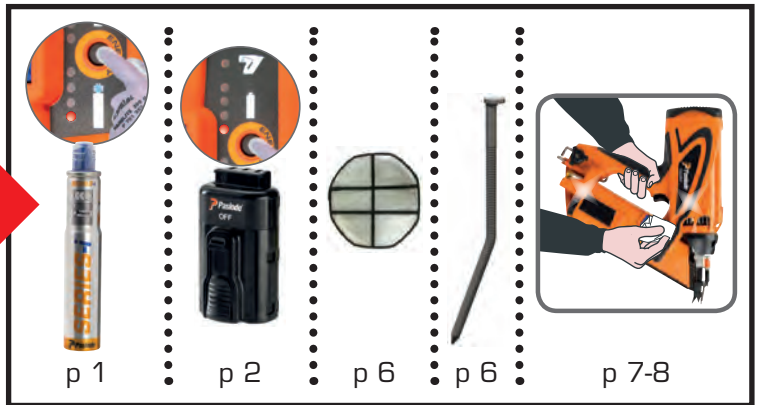
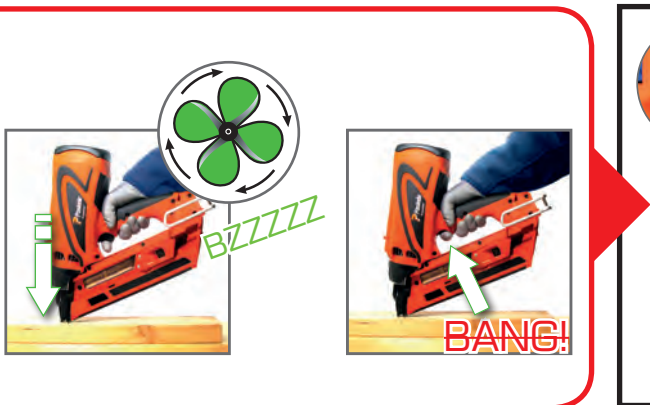
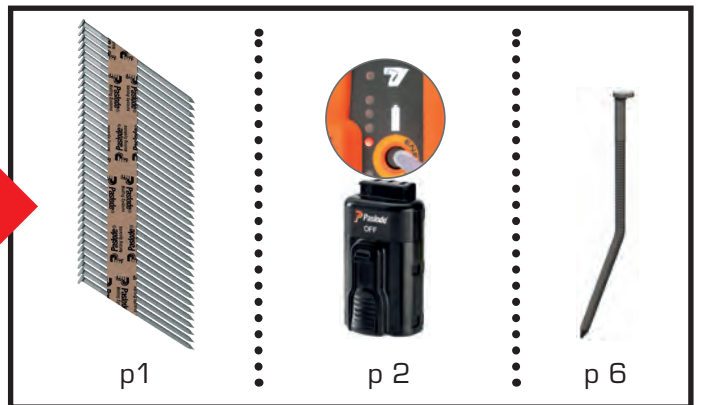
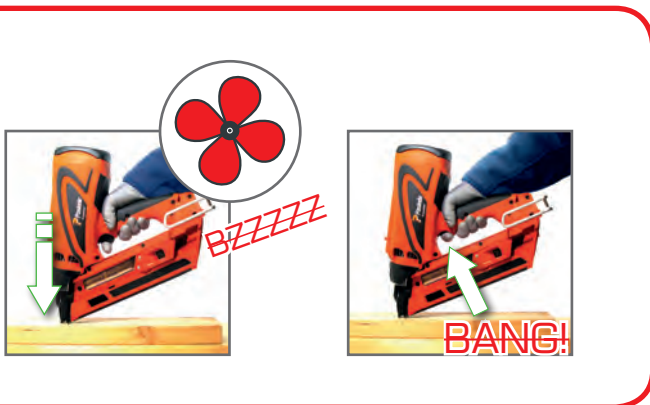




.....



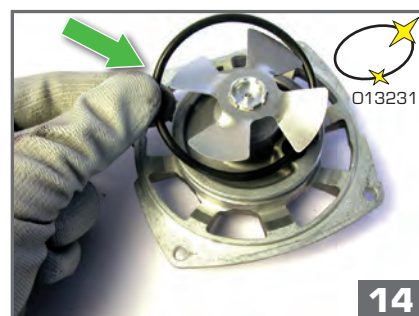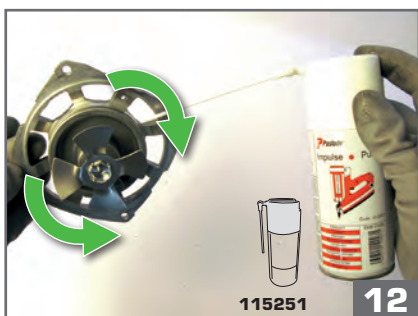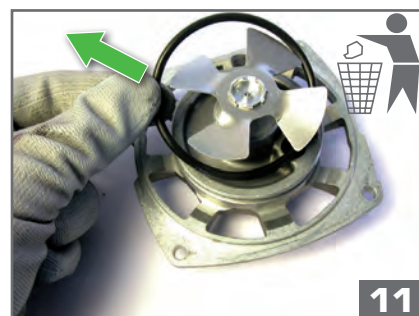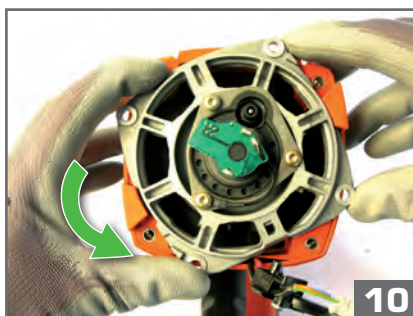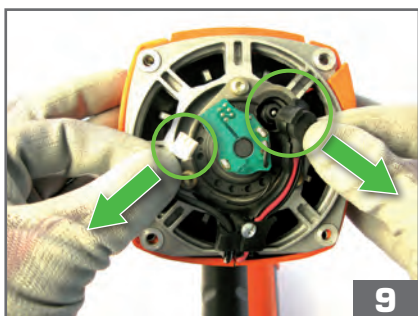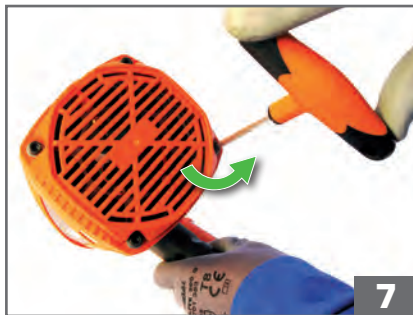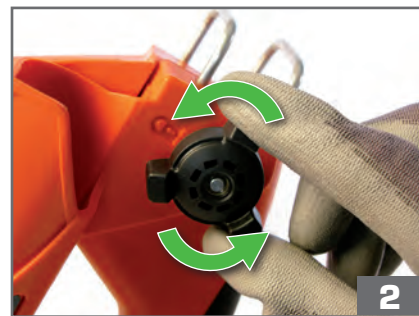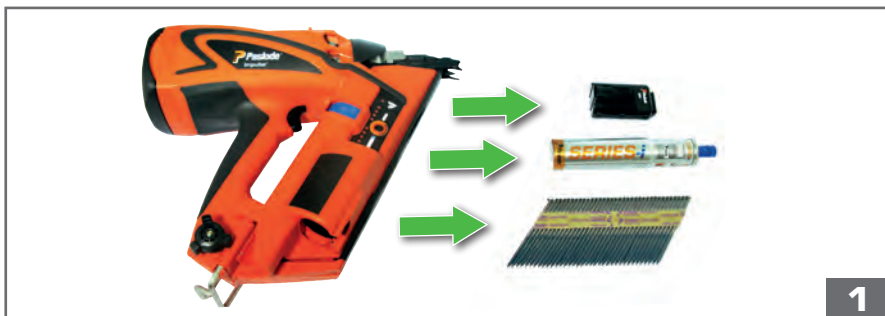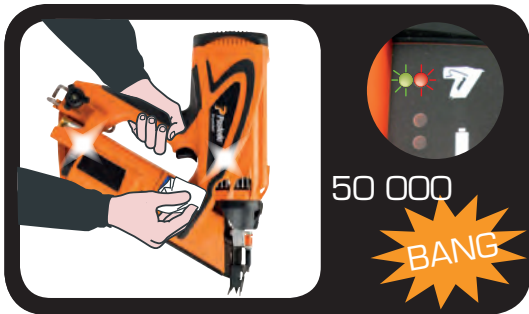

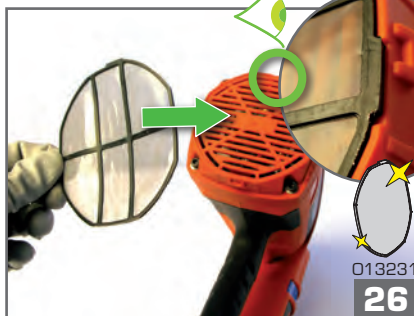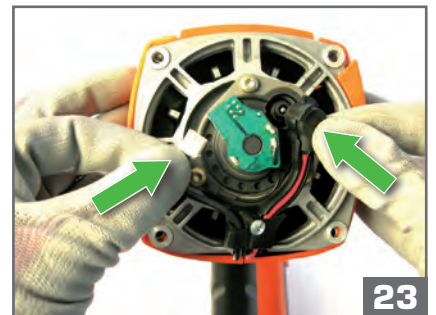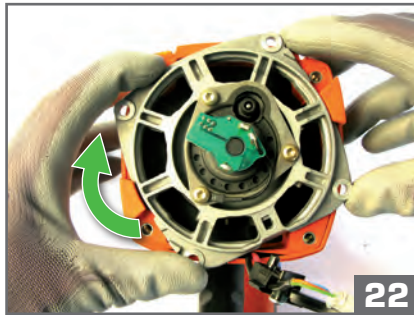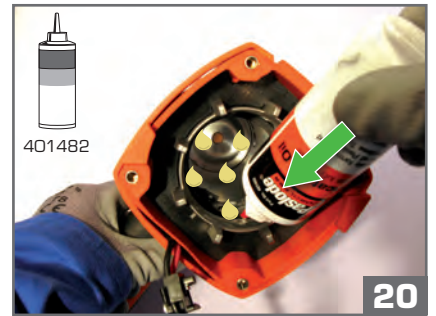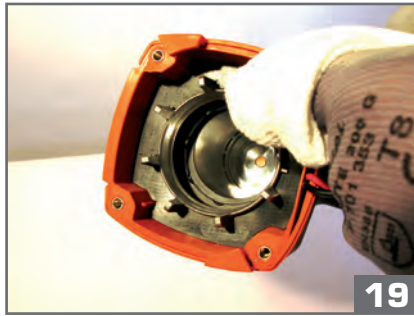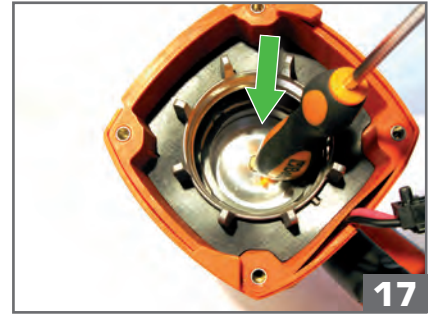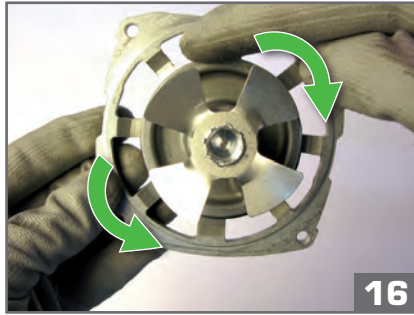

RESET





Paslode
Impulse®

Route de Lyon - BP 104
F-26501 Bourg-lès-Valence
Cedex - FRANCE

Réalisation Made in France - Photos non contractuelles

018328-1
05/13