Y- FILTER MED RILLER / Y- STRAINER WITH GROOVES

AVI 1760G

BESKRIVELSE:

Til sjøvann, ferskvanns, kjøle- og varmesystemer, brennolje mm. Testet iht. EN12266-1. Leveres standard med uttak for differansetrykksmåling (3/8").

BYGGEMÅL:

Byggemål iht. EN558-1/DIN3202 F1.
Riller iht. AWWA C606-4.

MONTERING:

Horisontalt med silen ned (som bildet under).

MASKEVIDDE:

Standard DN32-DN65: 0,6 mm DN80-DN300: 1,0 mm.
Kan leveres med 0,25 opp til og med DN150.

ARBEIDSTEMPERATUR:

-20°C - 120°C

DESCRIPTION:

For sea water, fresh water. Heating- and cooling systems, fuel oil etc. Tested acc. to EN12266-1. Standard delivered with plug for differential pressure measurement (3/8").

FACE TO FACE:

Face to face dimensions conforms to EN558-1/DIN3202 F1.
Grooves acc. to AWWA C606-4.

MOUNTING:

Horizontal with strainer down (as in picture below).

MESH SIZE:

Standard DN32-DN65: 0,6 mm DN80-DN300: 1,0 mm.
Can be delivered with 0,25 up to included DN150.

WORKING TEMPERATURE:

-20°C - 120°C





Magnetstav 316 / Magnetic rod 316


Nr.	Detalj/Part name	Materiale/Material	Antall/Qty.
1	Hus/Body	GGG40	1
2	Sil/Screen	316	1
3	Dekselpakn./Bonnet Gasket	Tesnit BA-U	1
4	Deksel/Bonnet	GGG40	1
5	Plugg/Plug	C35E, 1.1181	1
6	Bolt/Bolt	304	4
7	Skive/Washer	304	4
8	Dekselbolt/Screw Nut	304	4
9	Plugg 3/8/Plug 3/8"	316	2


TILBEHØR, MAGNETSTAV/ ACCESSORIES, MAGNET ROD
HS CODE INT. 8421.29

DN	Vare nr. Part no.	L mm	M
32	4013951	70	1/2"
40	4013952	82	1/2"
50	4013953	106	1/2"
65	4013954	123	1/2"
80	4013955	144	1/2"
100	4013956	177	3/4"
125	4013957	220	3/4"
150	4013958	220	3/4"
200	4013959	254	3/4"
250	4013961	362	1"
300	4013962	400	1"


Y-FILTER MED FLENSER/Y-STRAINER WITH FLANGES
HS CODE INT. 8421.29

DN	Vare nr. Part no.	L mm	øD mm	H1 mm	Vekt Weight kg
32	4017656	180	42,16	103	5,61
40	4017657	200	48,26	114	6,61
50	4017658	230	60,32	130	7,44
65	4017659	290	70,10	155	10,54
80	4017661	310	88,90	172	13,26
100	4017662	350	114,30	205	20,65
125	4017663	400	139,70	270	33,00
150	4017664	480	168,27	320	43,00
200	4017665	600	219,00	378	77,00
250	4017666	730	273,00	450	115,00
300	4017667	850	323,85	525	172,00

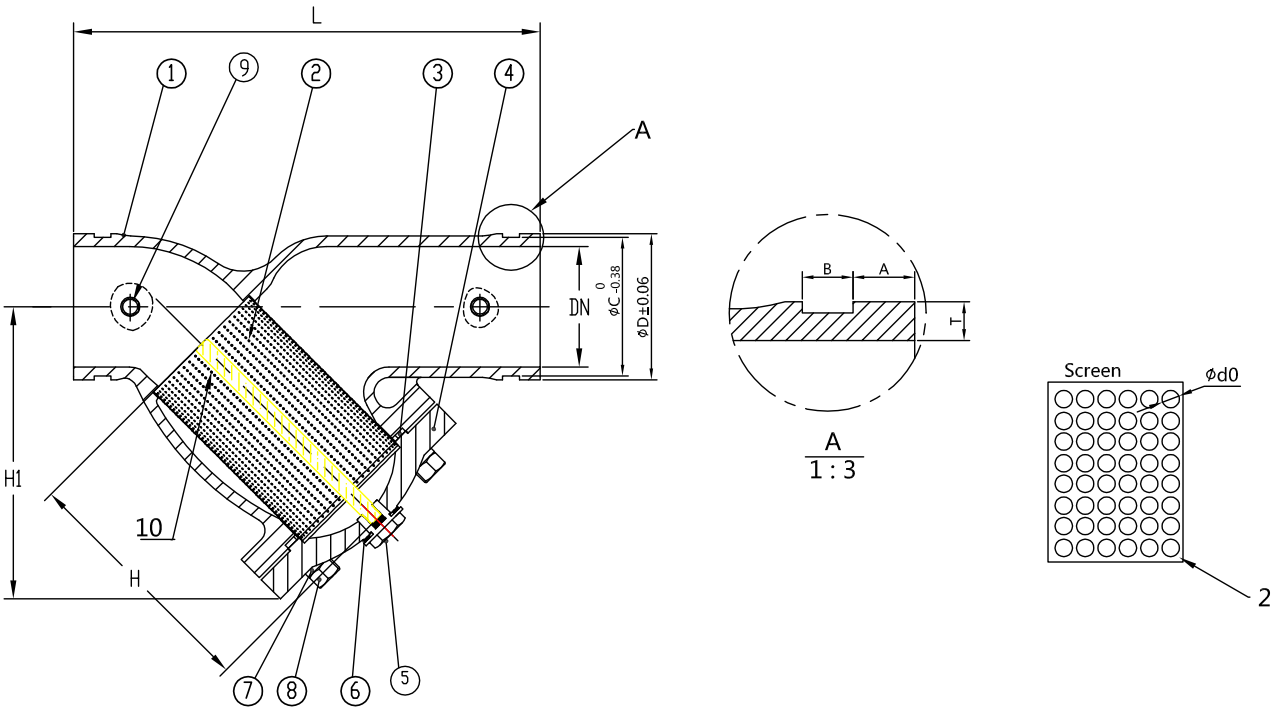

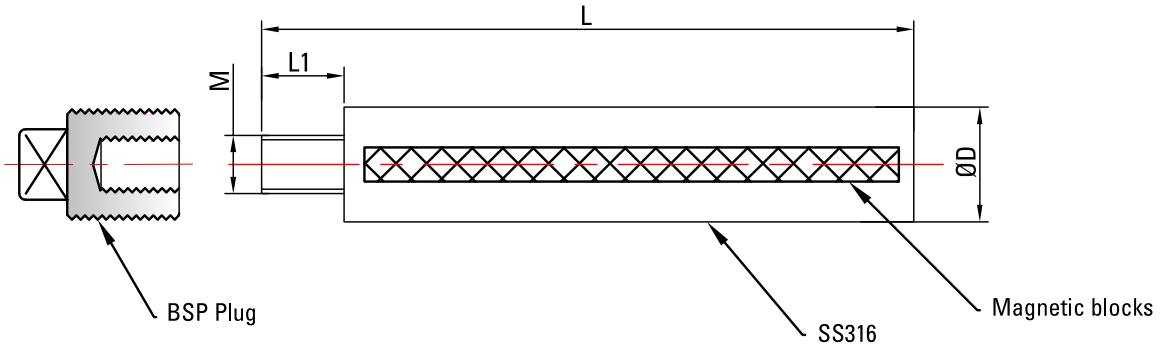

TRYKK OG FLOW DIAGRAM / PRESSURE DROP TABLE

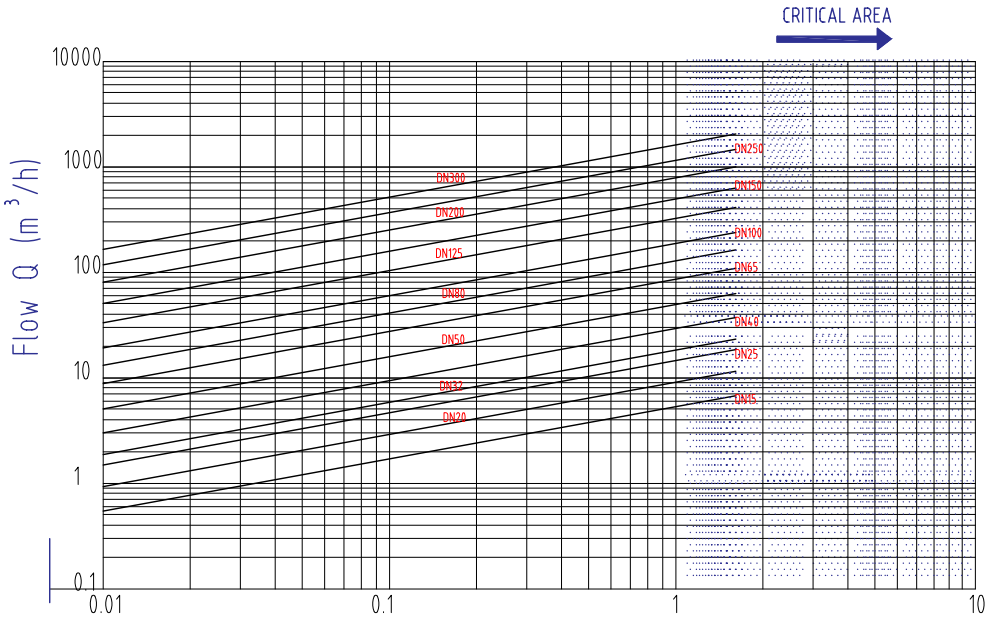

17