


SPIT CW6 - crocowood

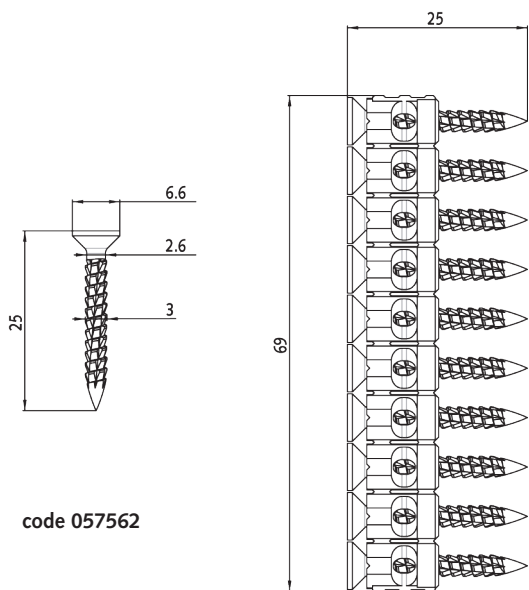

DESCRIPTION

- Metal suspension system to wood truss.
- Possibility to remove it, using Pozidrive print (PZ2).

PROPERTIES MATERIAL

Screw in carbon steel

- Countersunk head, PZ2
- Electrogalvanised, min zinc coating 5 μm
- Hardness: 500 N/mm² mini
- Without Chrome VI

TOOLS

P800P / P800P+

APPLICATION LIMIT

- Wooden structures, with minimum thickness 25 mm.
- No adapted for concrete base material.

RECOMMENDED LOAD

| CW6 range | Tensile load | | Shear load for a displacement of 1 mm |
|---|------------------------|-------------------------|---------------------------------------|
| | N _{Rk} * (kN) | N _{Rec} * (kN) | V _{Rec} * (kN) |
| Wooden plate, thickness 35 mm (pine wood) | 0.46 | 0.15 | 0.10 |

* Indicative value