

SPIT CW6 - crocowood





code 057562

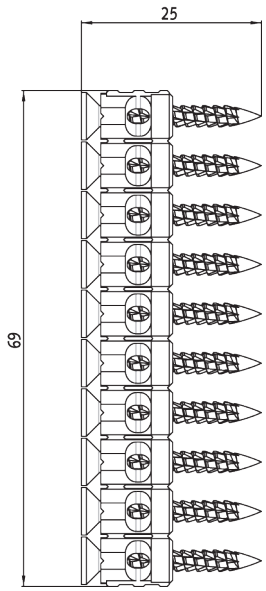

DESCRIPTION

- Metal suspension system to wood truss.
- Possibility to remove it, using Pozidrive print (PZ2).

PROPERTIES MATERIAL

Screw in carbon steel

- Countersunk head, PZ2
- Electrogalvanised, min zinc coating 5 µm
- Hardness: 500 N/mm^2 mini
- Without Chrome VI

TOOLS

P800P / P800P+

APPLICATION LIMIT

- Wooden structures, with minimum thickness 25 mm.
- No adapted for concrete base material.

RECOMMENDED LOAD

CW6 range	Tensile load		Shear load for a displacement of 1 mm
	N_{Rk}* (kN)	N_{Rec}* (kN)	V_{Rec}* (kN)
 Wooden plate, thickness 35 mm (pine wood)	0.46	0.15	0.10

* Indicative value