


Sprinkler clamp FRSP

The flexible sprinkler loop with FM and UL approval

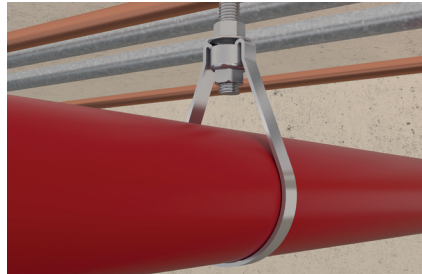

Sprinkler pipe installation

Applications

- Installation of sprinkler pipes
- Used for the suspension of stationary, non-insulated pipelines

Certificates



from M10


Advantages/benefits

- For easy installation of sprinkler pipes from 1/2" to 8" for a wide range of applications.
- Simple assembly by inserting, hanging and adjusting the pipes. Saves time during installation.
- Simple height adjustment by means of a height-adjustable connecting nut.
- The sprinkler clamp has FM and UL approval ensuring safe application.


Properties

- Material: steel Q235B
- Zinc plating: electro zinc-plated, min. 5 µm

Installation FRSP

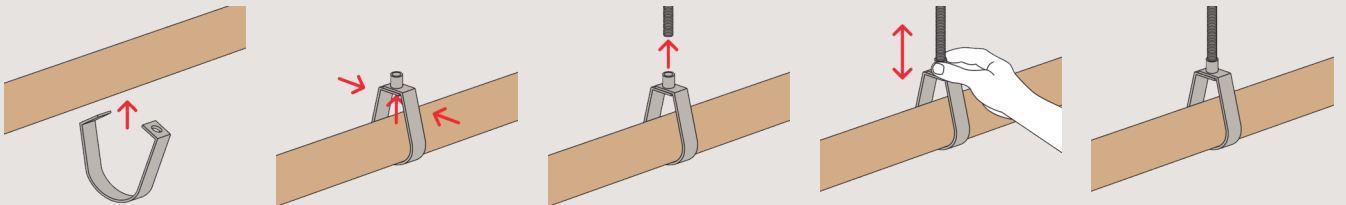

Technical data

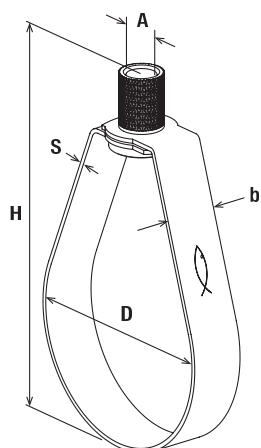

2a

FRSP

Item	Item No.	FM approved	UL approved	Size [inch]	Thread Ø x length [mm]	Height H [mm]	Width x thick- ness clamp band b x s [mm]	Max. recom. static load (centr. tension) N _{recom.} [kN]	Sales unit [pcs]
FRSP 1/2"	516662	—	X	1/2"	M 10 x 22,5	55	16 x 1,2	1.50	100
FRSP 3/4"	516663	X	X	3/4"	M 10 x 22,5	62	16 x 1,2	1.50	100
FRSP 1"	516664	X	X	1"	M 10 x 22,5	70	16 x 1,2	1.50	100
FRSP 1-1/4"	516665	X	X	1 1/4"	M 10 x 22,5	78	16 x 1,2	1.50	100
FRSP 1-1/2"	516666	X	X	1 1/2"	M 10 x 22,5	83	16 x 1,2	1.50	100
FRSP 2"	516667	X	X	2"	M 10 x 22,5	93	16 x 1,2	1.50	100
FRSP 2-1/2"	516668	X	X	2 1/2"	M 10 x 22,5	126	19 x 2,2	5.50	60
FRSP 3"	516669	X	X	3"	M 10 x 22,5	147	19 x 2,2	5.50	60
FRSP 4"	516670	X	X	4"	M 10 x 22,5	180	19 x 2,2	5.50	24
FRSP 5"	532356	X	X	5"	M 12 x 26,8	210	19 x 2,5	6.50	24
FRSP 6"	516671	X	X	6"	M 12 x 26,8	251	19 x 3,0	6.50	24
FRSP 8"	516672	X	X	8"	M 12 x 26,8	301	19 x 3,0	6.50	12