

## NEDFORINGS HØYDER NORGIPS FLEX

### Nonius:


L= mål i prisliste

L<sub>virkl</sub> = virkelig mål

h<sub>max</sub>/h<sub>min</sub> =max/min byggemål vist i skisse.


Min<sub>kapett</sub> = minste byggemål når hengeren brytes av i "siste" bruddanvisningen.

Noniushenger	L	L <sub>virkl</sub>	h <sub>max</sub>	h <sub>min</sub>	Min <sub>kapett</sub>
115	85	85	195	145	-
120	135	135	245	145	-
130	235	230	335	235	175
140	340	330	435	335	250
150	440	430	535	435	340
160	540	530	635	535	440
170	640	630	735	635	
180	740	730	835	735	655
190	840	835	945	840	750
200	940	940	1045	955	505

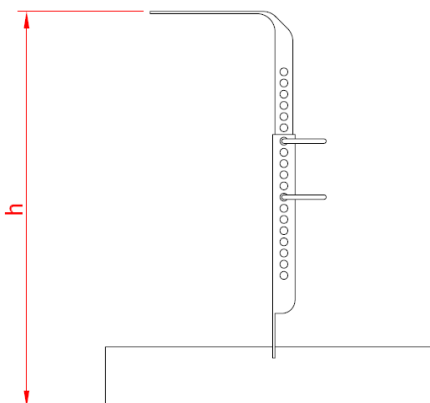

### Direktebeslag:

h <sub>max</sub>	h <sub>min</sub>
120	30

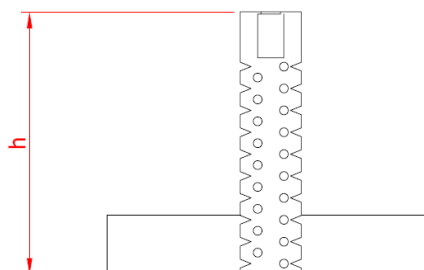

### Justerbart ankare:

Pendel	h <sub>max</sub>	h <sub>min</sub>
125	175	125
250	300	200
500	550	500
1000	1050	1000

