



# ENVIRONMENTAL PRODUCT DECLARATION

in accordance with ISO 14025, ISO 21930 and EN 15804

Owner of the declaration:	Mapei AS
Program operator:	The Norwegian EPD Foundation
Publisher:	The Norwegian EPD Foundation
Declaration number:	NEPD-460-319-EN
Issue date:	01.07.2016
Valid to:	01.07.2021

## Conplan Eco VR

Mapei Norge AS

[www.epd-norge.no](http://www.epd-norge.no)



## General information

**Product:**

Conplan Eco VR

**Program operator:**

The Norwegian EPD Foundation  
 Postbox 5250 Majorstuen, 0303 Oslo  
 Phone: +47 23 08 82 92  
 e-mail: post@epd-norge.no

**Declaration number:**

NEPD-460-319-EN

**ECO Platform reference number:**

-

**Owner of the declaration:**

Mapei AS  
 Contact person: Dao Ringøy  
 Phone: 995 38 839  
 e-mail: dao.ringoy@mapei.no

**Manufacturer:**

Mapei AS  
 Vallsetvegen 6 2120 Sagstua  
 Phone: 62 97 20 00  
 e-mail: post@mapei.no

**Place of production:**

Vallsetvegen 6 2120 Sagstua, Norway

**Management system:**

EMAS, ISO 9001, ISO 14001, OHSAS 18001, ISO 10002

**This declaration is based on Product Category Rules:**

CEN Standard EN 15804 serves as core PCR  
 NPCR 09, Technical - Chemical products for the building-  
 and construction industry, January 2012

**Statement of liability:**

The owner of the declaration shall be liable for the  
 underlying information and evidence. EPD Norway shall  
 not be liable with respect to manufacturer information, life  
 cycle assessment data and evidences.

**Organisation no:**

911103079

**Issue date:**

01.07.2016

**Valid to:**

01.07.2021

**Declared unit:**

1 kg of dry mortar product

**Year of study:**

2015

**Declared unit with option:**

1 m<sup>2</sup> of mortar applied, 25 mm thickness using 41,75 kg of  
 mortar per m<sup>2</sup>

**Comparability:**

EPD of construction products may not be comparable if they  
 do not comply with EN 15804 and are seen in a building  
 context.

**Functional unit:**
**The EPD has been worked out by:**

Sweco Norge AS

**Verification:**

The CEN Norm EN 15804 serves as the core PCR.  
 Independent verification of the declaration and data,  
 according to ISO14025:2010

internal  external

Third party verifier:

  Østfoldforskning  
 SUSTAINABLE INNOVATION

Senior Research Scientist, Mie Vold  
 (Independent verifier approved by EPD Norway)

Approved

  
 Håkon Hauan  
 Managing Director of EPD-Norway

## Product

### Product description:

Conplan Eco VR is a fibre-reinforced, rapid-drying compound for levelling over heating cables, when there is insufficient space for normal concrete casting or reinforcement net.

### Product specification:

Conplan Eco VR is supplied as dry mortar, and only needs the addition of water. Can be laid in thicknesses of 5-40 mm in a single operation.

### Technical data:

1700 kg/m<sup>3</sup> for the dry mortar and 2000 kg/m<sup>3</sup> for the finished product. The water content is 16,5 %. In total there is 41,75 kg dry mortar product per m<sup>2</sup>.

### Market:

Nordic countries

### Reference service life, product:

N/A

### Reference service life, building:


N/A

Materials	kg	%
Sand	18,7	37,3
Milled Gypsum and Limestone	14,8	29,5
Cement	7,4	14,9
Additives	0,9	1,8
Water	8,3	16,5

## LCA: Calculation rules

### Declared unit:

1 kg of dry mortar product

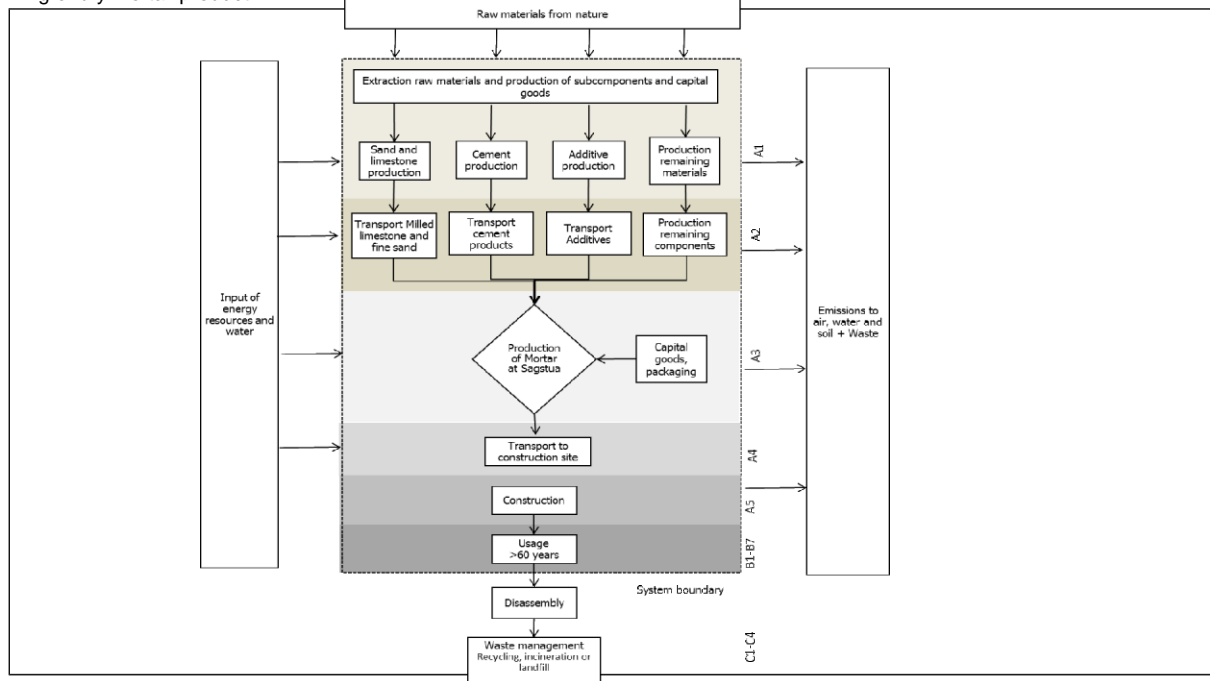

### Data quality:

Specific data and EPDs have been collected for all the major components while generic or proxy data has been used for the components where specific data was not available and for the less important components. The specific data is generally dated to 2014 while some has been averaged from 3 years back. The data collection period is second half of 2015.

Data sources for background data: GaBi, ELCD, Ecoinvent 3.1, Industry data. The age of this data varies from mid 1990 to 2014.

### Cut-off criteria:

All major raw materials and all the essential energy is included. The production process for raw materials and energy flows that are included with very small amounts (<1% of total energy demand) are not included. This cut-off rule does not apply for hazardous materials and substances.

### Allocation

The allocation is made in accordance with the provisions of EN 15804. Incoming energy and water and waste production in-house is allocated equally among all products through mass allocation. Effects of primary production of recycled materials allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

## LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

### Transport from production place to user (A4)

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Value (l/tkm)
Truck	50% (capacity of 35 tonnes)	Euro 5	100	l/tkm	0,024
Railway				kWh/tkm	
Boat				l/tkm	
<Other Transportation>				<xx>	

The A4 scenario only refers to a standard distance. The impact in A4 may be scaled to the actual distance to a specific customer. It is assumed that the bulk truck loads 35 tonnes at Mapei and goes empty in return.

### Assembly (A5)

	Unit	Value
Auxiliary	kg	
Water consumption	m <sup>3</sup>	0,00825
Electricity consumption	kWh	0,27833
Diesel consumption - bulk truck	MJ	
Material loss	kg	
Output materials from waste treatment	kg	
Dust in the air	kg	

### Use (B1)

	Unit	Value

The scenario is based on products delivered in bags (100%). For the installation a blender that uses 2 kWh electricity per 300 kg of mortar is applied.

### Maintenance (B2)/Repair (B3)

	Unit	Value
Maintenance cycle*		
Auxiliary	kg	
Other resources	kg	
Water consumption	m <sup>3</sup>	
Electricity consumption	kWh	
Other energy carriers	MJ	
Material loss	kg	

### Replacement (B4)/Refurbishment (B5)

	Unit	Value
Replacement cycle*		
Electricity consumption	kWh	
Replacement of worn parts	0	

\* Number or RSL (Reference Service Life)

Maintenance and repair are included in the EPD although they have been categories as not relevant (no impacts) because there is no maintenance nor repair during the lifetime of the product.

### Operational energy (B6) and water consumption (B7)

	Unit	Value
Water consumption	m <sup>3</sup>	
Electricity consumption	kWh	
Other energy carriers	MJ	
Power output of equipment	kW	

### End of Life (C1, C3, C4)

	Unit	Value
Hazardous waste disposed	kg	
Collected as mixed construction waste	kg	
Reuse	kg	
Recycling	kg	
Energy recovery	kg	
To landfill	kg	

### Transport to waste processing (C2)

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Value (l/t)
Truck				l/tkm	
Railway				kWh/tkm	
Boat				l/tkm	
<Other Transportation>				<xx>	

**Benefits and loads beyond the system boundaries (D)**

	Unit	Value

**Additional technical information**

Conplan Eco VR has Technical Approval – No. and CE-approved and classified as CT-C30-F7 in accordance with EN13813.

**LCA: Results**

**System boundaries (X=included, MND= module not declared, MNR=module not relevant)**

Product stage		Assembly stage			Use stage								End of life stage				Beyond the system boundaries
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential	
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
x	x	x	x	x	MND	MNR	MNR	MND	MND	MND	MND	MND	MND	MND	MND	MND	

**Environmental impact**

Parameter	Unit	A1	A2	A3	A1- A3	A4	A5	Sum A1-A5	B2-B3
GWP	kg CO <sub>2</sub> -eqv	8,25E+00	1,21E+00	2,00E-01	9,67E+00	4,22E-01	1,02E-02	1,01E+01	0
ODP	kg CFC11-eqv	5,72E-07	2,26E-07	2,35E-08	8,22E-07	7,97E-08	1,19E-09	9,03E-07	0
POCP	kg C <sub>2</sub> H <sub>4</sub> -eqv	1,99E-03	2,59E-04	6,14E-05	2,31E-03	7,31E-05	2,42E-06	2,39E-03	0
AP	kg SO <sub>2</sub> -eqv	2,91E-02	6,16E-03	1,04E-03	3,63E-02	1,49E-03	5,22E-05	3,78E-02	0
EP	kg PO <sub>4</sub> <sup>3-</sup> -eqv	4,50E-03	1,07E-03	4,63E-04	6,03E-03	3,10E-04	2,43E-05	6,37E-03	0
ADPM	kg Sb-eqv	8,92E-06	2,51E-06	3,34E-06	1,48E-05	9,37E-07	1,84E-07	1,59E-05	0
ADPE	MJ	6,86E+01	1,98E+01	2,40E+00	9,08E+01	6,96E+00	1,08E-01	9,79E+01	0

GWP Global warming potential; ODP Depletion potential of the stratospheric ozone layer; POCP Formation potential of tropospheric photochemical oxidants; AP Acidification potential of land and water; EP Eutrophication potential; ADPM Abiotic depletion potential for non fossil resources; ADPE Abiotic depletion potential for fossil resources

Resource use									
Parameter	Unit	A1	A2	A3	A1- A3	A4	A5	Sum A1-A5	B2-B3
RPEE	MJ	4,87E+00	3,64E-01	9,14E+00	1,44E+01	9,93E-02	1,13E+00	1,56E+01	0
RPEM	MJ	3,76E-01	0,00E+00	0,00E+00	3,76E-01	0,00E+00	0,00E+00	3,76E-01	0
TPE	MJ	5,21E+00	3,64E-01	9,14E+00	1,47E+01	9,93E-02	1,13E+00	1,60E+01	0
NRPE	MJ	6,03E+01	2,61E+01	2,79E+00	8,92E+01	7,09E+00	9,42E-02	9,64E+01	0
NRPM	MJ	2,07E+01	0,00E+00	0,00E+00	2,07E+01	0,00E+00	0,00E+00	2,07E+01	0
TRPE	MJ	8,10E+01	2,61E+01	2,79E+00	1,10E+02	7,09E+00	1,46E-01	1,17E+02	0
SM	kg	2,84E-01	6,94E-03	2,49E-03	2,93E-01	1,66E-03	3,87E-05	2,95E-01	0
RSF	MJ	9,14E-01	0,00E+00	0,00E+00	9,14E-01	0,00E+00	0,00E+00	9,14E-01	0
NRSF	MJ	1,47E+01	0,00E+00	0,00E+00	1,47E+01	0,00E+00	0,00E+00	1,47E+01	0
W	m <sup>3</sup>	1,78E+00	1,08E+00	3,35E+00	6,21E+00	2,78E-01	3,71E-01	6,86E+00	0

RPEE Renewable primary energy resources used as energy carrier; RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy resources; NRPE Non renewable primary energy resources used as energy carrier; NRPM Non renewable primary energy resources used as materials; TRPE Total use of non renewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; W Use of net fresh water

End of life - Waste									
Parameter	Unit	A1	A2	A3	A1- A3	A4	A5	Sum A1-A5	B2-B3
HW	kg	0,04793609	0,0007215	4,08E-04	4,91E-02	1,73E-04	0,00E+00	4,92E-02	0
NHW	kg	0,24185061	0,0100659	5,56E-01	8,08E-01	2,42E-03	3,01E-03	8,13E-01	0
RW	kg	0,0006347	0	0,00E+00	6,35E-04	0,00E+00	0,00E+00	6,35E-04	0

HW Hazardous waste disposed; NHW Non hazardous waste disposed; RW Radioactive waste disposed

End of life - Output flow									
Parameter	Unit	A1	A2	A3	A1- A3	A4	A5	Sum A1-A5	B2-B3
CR	kg	0	0	0	0	0	0	0	0
MR	kg	0,00759293	0,0035639	0,00E+00	1,12E-02	8,56E-04	0,00E+00	1,20E-02	0
MER	kg	0	0	0	0	0	0	0	0
EEE	MJ	0	0	0	0	0	0	0	0
ETE	MJ	0	0	0	0	0	0	0	0

CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy

Reading example:  $9,0 \text{ E-}03 = 9,0 \cdot 10^{-3} = 0,009$

## Additional Norwegian requirements

### Greenhouse gas emission from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process(A3).

Data source	Amount	Unit
Econinvent v3 (june 2014)	24	CO <sub>2</sub> -eqv/kWh

### Dangerous substances

- The product contains no substances given by the REACH Candidate list or the Norwegian priority list
- The product contains substances given by the REACH Candidate list or the Norwegian priority list that are less than 0,1 % by weight.
- The product contain dangerous substances, more then 0,1% by weight, given by the REACH Candidate List or the Norwegian Priority list, see table.
- The product contains no substances given by the REACH Candidate list or the Norwegian priority list. The product is classified as hazardous waste (Avfallsforskriften, Annex III), see table.

Name	CAS no.	Amount

#### Indoor environment

The products are tested by GEV Emicode in accordance with ISO16000 and meet the requirements for the ECR1 <sup>Plus</sup> label.

#### Carbon footprint

Carbon footprint has not been worked out for the product.

### Bibliography

ISO 14025:2010	Environmental labels and declarations - Type III environmental declarations - Principles and procedures
ISO 14044:2006	Environmental management - Life cycle assessment - Requirements and guidelines
EN 15804:2012+A1:2013	Sustainability of construction works - Environmental product declaration - Core rules for the product category of construction products
ISO 21930:2007	Sustainability in building construction - Environmental declaration of building products
NPCR09:2012	Technical - Chemical products for the building- and construction industry
Sjöstrand, 2016	LCA report for Mapei Mortar products, Sweco, Report nr 01-2016
GEV Emicode: 2012	Association for the control of emissions from products for flooring installation, adhesives and building materials, License nr: 3406/01.10.05, April 30, 2012

 <b>epd-norge.no</b> The Norwegian EPD Foundation	<b>Program operator</b> The Norwegian EPD Foundation Postbox 5250 Majorstuen, 0303 Oslo Norway	Phone: +47 230 88 292  e-mail: <a href="mailto:post@epd-norge.no">post@epd-norge.no</a> web: <a href="http://www.epd-norge.no">www.epd-norge.no</a>
	<b>Publisher</b> The Norwegian EPD Foundation Postbox 5250 Majorstuen, 0303 Oslo Norway	Phone: +47 23 08 82 92  e-mail: <a href="mailto:post@epd-norge.no">post@epd-norge.no</a> web: <a href="http://www.epd-norge.no">www.epd-norge.no</a>
	<b>Owner of the declaration</b> Mapei AS Vallsetvegen 6, 2120 Sagstua Norway	Phone: +47 62 97 20 00 Fax: +47 62 97 20 28 e-mail: <a href="mailto:post@mapei.no">post@mapei.no</a> web: <a href="http://www.mapei.com/no">www.mapei.com/no</a>
	<b>Author of the Life Cycle Assessment</b> Karin Sjöstrand, Sweco Norge AS Drammensveien 260 NO-0212 Oslo, Norway	Phone: + 47 67 12 80 00 Fax: e-mail: <a href="mailto:post@sweco.no">post@sweco.no</a> web: <a href="http://www.sweco.no">www.sweco.no</a>