


Cim 138




Den er produsert av en messinglegering som er i henhold til standard EN 12165-CW617N-DW.

MENGDE OG TRYKKTAP

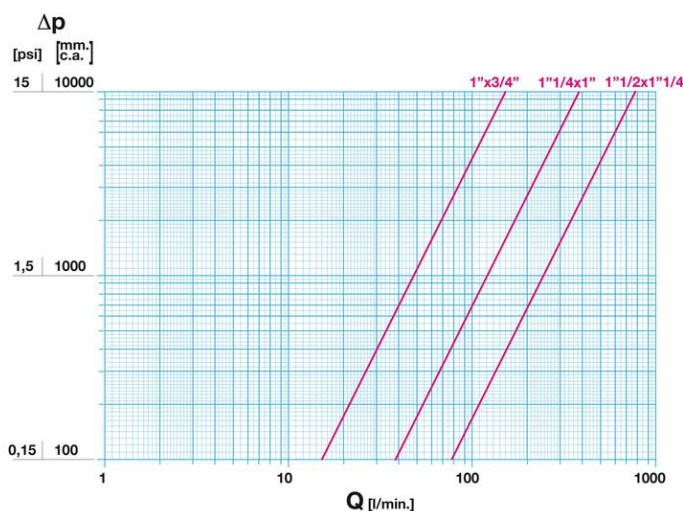


Noter:
1 l/min = 0,06 m³/h
1 m³/h = 16,67 l/min
1 bar = 10.000 mm w.c.
1 psi = 690 mm w.c.

TRYKK OG TEMPERATUR TABELL

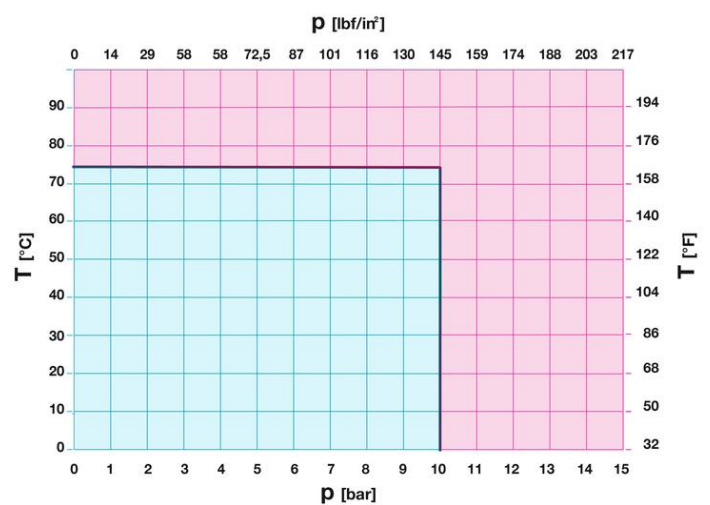

1 bar = 14,5 psi
1 bar = 14,5 lbf/in²
°C = 5/9 x (°F-32)
°F = 32 + (9/5 x °C)

TEKNISK TEGNING

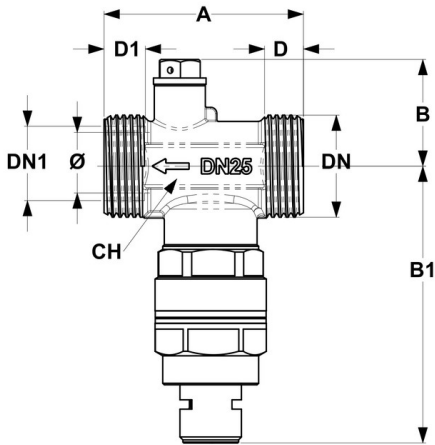


DNXDN1	1"x3/4"	1"1/4x1"	1"1/2x1"1/2
Ø mm	16	23	31
Grms.			
A	64,5	64,5	64,5
B	34,5	38	42
B1	92	95,5	99,5
D	13	13	13
D1	12,	12,5	12,5
CH	30	36	44

Gjenget:
ISO 228

På forespørsel:
ANSI B.1.20.1 - NPT

TEKNISKE EGENSKAPER

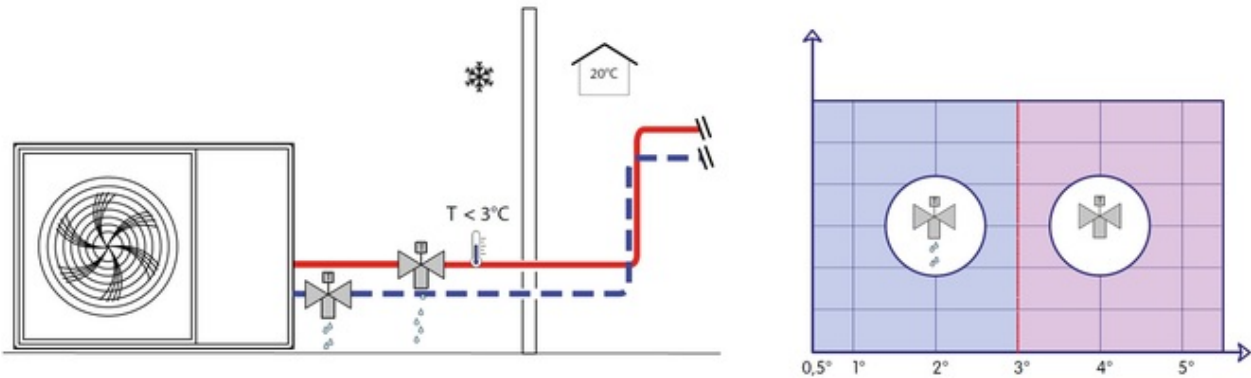

KV - Q			
DNXDN1	1"x3/4"	1"1/4x1"	1"1/2x1"1/4
Ø mm	16	23	31
KV	9	23	47
Q 3	0,3	0,3	0,3
Q 0.5	3	3	3

VÅRE SERTIFIKATER

