
MAC 3



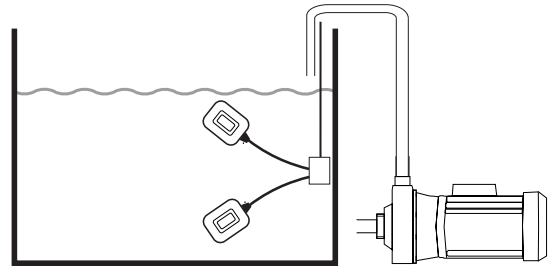

Mac 3 nivåvippe er det er den mest universelt brukte nivåvippen i verden for automatisering av pumper og lagertanker.
Fordeler: På grunn av sin størrelse er det den mest allsidige for enhver applikasjon. Den er svært pålitelig og kan produseres i mange variasjoner i samsvar med behovene til enhver kunde. Dobbel operasjon, for fylling og tømming.

Application: It is the most universally used float switch in the world for the automation of pumps and storage tanks.
Advantages: Due to its size makes it the most versatile for any application.
Benefits: It is highly reliable and can be produced in many variations in accordance with the needs of each client and country. Dual operation for filling and emptying.

Elektriske funksjoner	16(4)A 250V ~ , 20(8)A 250 V~ 20(8)A 250 V~ 10(6)A 400 V~ (Multispenning)	Microswitch electrical features
Godkjenning	ENEC/CE 10(4)A 250V ~ , 10(8)A 250V~ 10(8)A 250 V~ 10(6)A 400 V~(multispenning)	Approval
Driftstemperatur	0°C ÷ + 50°C	Operating Temp.
Lagringstemperatur	-10°C ÷ +60°C	Storage temp.
Beskyttelsesklasse IP	IP 68	Protection rating
Vinkel	±45°	Switch angle
Dimensjon	mm 81x131x41.5	Dimensions
Vekt	gr. 154	Weight
Volum	cm^3 243	Volume
Maks dybdenivå	1 bar	Max depth level
Materiale	Polypropylen (PP) Non-toxic polypropylene (PP)	Housing
Farge	Ikke-giftig Non- toxic	Colouring
Standard kabel	PVC 3X1 H07RN-F 3G1 H07RN-F 3X1 H07RN-F 4G1	Standard cable
Notat	Ved bestilling, spesifiser om det skal brukes for fylle- eller tømmefunksjon When ordering please specify if needed for filling or emptying function	Note