

SYREFAST NÅLEVENTIL / STAINLESS STEEL NEEDLE VALVE

SIP - 710-S

BRUKSOMRÅDE:

Nåleventil for bruk til medium opp til 400 bar.

MATERIALE:

Syrefast stål 316

TRYKK:

PN400 (6000PSI) for vann, olje, gass mm.

TEMPERATUR:

-10°C to 230°C (-50°F to 450°F)

APPLICATION:

Needle valve for mediums up to 400 bar.

MATERIAL:


Stainless Steel 316

PRESSURE:


PN400 (6000PSI) for Water, Oil, Gas Industry

TEMPERATURE:

-10°C to 230°C (-50°F to 450°F)

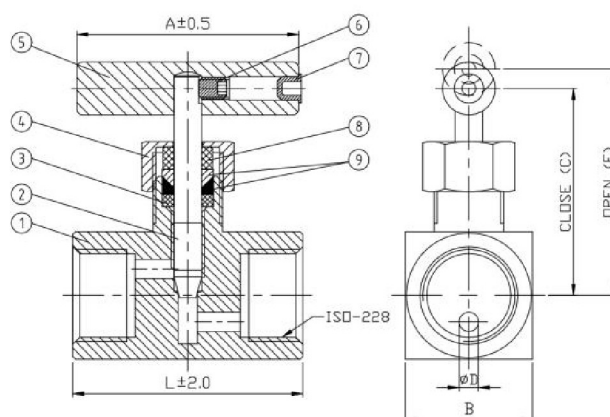

Nr.	Detalj/Part name	Materiale/Material
1	Sett skruer/Set screw	AISI 304/1.4301
2	Håndtak/Handle	AISI 304/1.4301
3	Stem/Stem	AISI 316/1.4408
4	Gland mutter/Gland nut	AISI 304/1.4301
5	Gland/Gland	AISI 304/1.4301
6	Pakning/Packing	PTFE
7	Bonnet/Bonnet	CF8M
8	Hus/Body	CF8M

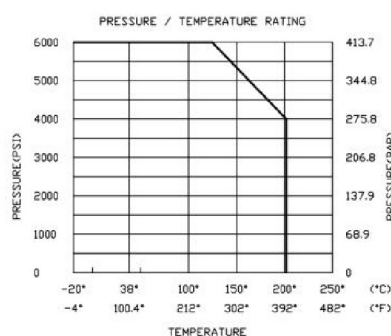

HS CODE INT. 8481.80

Gjenger Threads	Vare nr. Part no.	A mm	B mm	C mm	D mm	E mm	L mm	Vekt Weight Kg
1/4"	5617701	60	22	39	Ø3	42	58	0,26
3/8"	5617702	60	25	41	Ø3	44	58	0,26
1/2"	5617703	64	30	57	Ø4	64	63	0,32
3/4"	5617704	64	34	59	Ø5	66	65	0,59
1"	5617705	80	46	73	Ø7	80	83	0,59