

ANGLE BRACKET



- | | |
|--|---|
| 1. Product type identification code | Angle connector
Dimensions: see ETA-08/0214 |
| 2. Type, batch, series numbers or other identification code | ETA-08/0214
Batch number: see label |
| 3. Intended use | Fasteners for supporting wooden structures, as well as for the fastening of beams and purlins in accordance with ETA-08/0214 |
| 4. Manufacturer contact address | BB Stanz- und Umformtechnik GmbH
Nordhäuser Str. 44
06536 Berga
Germany |
| 5. System of systems for durability assessment and testing | System 2+ |
| 6. Reference document | ETA-08/0214 |
| 7. Eota ref. / number | ETA-Danmark A/S, Nordhavn |
| 8. Conducted by the certification authority | - Initial inspection of the manufacturing plant and of factory production control
- Current monitoring, analysis and assessment of factory production control
- Result in conformity certificate
0769-CPD-6016 |
| 9. Declared performance | See ETA-08/0214 |
| 10. Product performance pursuant to item 1 and 2 corresponds to the declared performance pursuant to item 9. The manufacturer pursuant to item 4 is liable for this Performance Declaration. | |

Signed for the manufacturer and on behalf of the manufacturer by:

Fredrik Toth

Thomé Gruppen AB

Bjurögatan 28, Box 50304, SE-202 13 Malmö, Sweden

Phone: +46 40 38 60 00, Fax: +46 40 18 57 80,

E-mail: info@fast-fastening.com, www.fast-fastening.com



ETA-Danmark A/S
Göteborg Plads 1
DK-2150 Nordhavn
Tel. +45 72 24 59 00
Fax +45 72 24 59 04
Internet www.etadanmark.dk

Authorised and notified according
to Article 29 of the Regulation (EU)
No 305/2011 of the European
Parliament and of the Council of 9
March 2011

MEMBER OF EOTA



European Technical Assessment ETA-08/0214 of 04/09/2015

I General Part

Technical Assessment Body issuing the ETA and designated according to Article 29 of the Regulation (EU) No 305/2011: ETA-Danmark A/S

Trade name of the construction product:

BB Angle Bracket type KR 95, KR 135, KR 137 and KR 285

Product family to which the above construction product belongs:

Three-dimensional nailing plate (Angle brackets for timber-to-timber, timber-to-steel or timber-to-concrete connections)

Manufacturer:

BB Stanz- und Umformtechnik
Nordhäuser Str. 42
D-06536 Berga
Tel. +49 34651 2988 0
Fax +49 34651 2988 20
Internet www.bb-berga.de

Manufacturing plant:

BB Stanz- und Umformtechnik
Nordhäuser Str. 42
D-06536 Berga

This European Technical Assessment contains:

21 pages including 2 annexes which form an integral part of the document

This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of:

Guideline for European Technical Approval (ETAG) No. 015 Three Dimensional Nailing Plates, April 2013, used as European Assessment Document (EAD).

This version replaces:

The previous ETA with the same number issued on 2013-06-19 and expiry on 2018-06-19

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full (excepted the confidential Annex(es) referred to above). However, partial reproduction may be made, with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such.

II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT

1 Technical description of product and intended use

Technical description of the product

Angle Brackets Type KR 95, 135, 137 and 285 are one-piece non-welded, face-fixed angle brackets to be used in timber to concrete and timber to steel connections. They are connected to the timber elements by ringed shank nails or screws and to the concrete and steel elements by bolts.

The angle brackets are made from steel DD 11 according to EN 10111 with a minimum yield strength of $R_{el} \geq 251 \text{ N/mm}^2$. Dimensions and hole are shown in Annex A. The angle brackets are made from steel with tolerances according to EN 10143.

2 Specification of the intended use in accordance with the applicable EAD

The angle brackets are intended for use in making connections in load bearing structures, as a connection between a timber component and a concrete or steel component, where requirements for mechanical resistance and stability and safety in use in the sense of the Basic Works Requirements 1 and 4 of Regulation (EU) 305/2011 shall be fulfilled.

The connection may be with a single angle bracket or with an angle bracket on each side of the fastened timber member (see Annex B).

The static and kinematic behaviour of the timber members or the supports shall be as described in Annex B.

The wood members can be of solid timber, glued laminated timber and similar glued members, or wood-based structural members with a characteristic density from 290 kg/m^3 to 420 kg/m^3 . This requirement to the material of the wood members can be fulfilled by using the following materials:

- Structural solid timber classified to C24-C40 according to EN 338 / EN 14081,
- Glulam classified to GL24-GL36 according to EN 1194 / EN 14080,
- LVL according to EN 14374,
- Parallam PSL,

- Intrallam LSL,
- Glued solid timber according to EN 14080,
- Cross laminated timber,
- Plywood according to EN 636

Annex B states the load-carrying capacities of the angle bracket connections for a characteristic density of 350 kg/m^3 . For timber or wood based material with a lower characteristic density than 350 kg/m^3 the load-carrying capacities shall be reduced by the k_{dens} factor:

$$k_{\text{dens}} = \left(\frac{\rho_k}{350} \right)^2$$

Where ρ_k is the characteristic density of the timber in kg/m^3 .

The design of the connections shall be in accordance with Eurocode 5 or a similar national Timber Code. The wood members shall have a thickness which is larger than the penetration depth of the nails into the members.

The angle brackets are primarily for use in timber structures subject to the dry, internal conditions defined by service class 1 and 2 or wet conditions defined by service class 3 of Eurocode 5 and for connections subject to static or quasi-static loading.

The angle brackets can also be used in outdoor timber structures, service class 3, when a corrosion protection in accordance with Euro Code 5 is applied, or when stainless steel with similar or better characteristic yield and ultimate strength is employed.

The scope of the brackets regarding resistance to corrosion shall be defined according to national provisions that apply at the installation site considering environmental conditions.

The provisions made in this European Technical Assessment are based on an assumed intended working life of the connectors of 50 years.

The indications given on the working life cannot be interpreted as a guarantee given by the producer or Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

Characteristic	Assessment of characteristic
3.1 Mechanical resistance and stability*) (BWR1)	
Characteristic load-carrying capacity	See Annex B
Stiffness	No performance determined
Ductility in cyclic testing	No performance determined
3.2 Safety in case of fire (BWR2)	
Reaction to fire	The angle brackets are made from steel classified as Euroclass A1 in accordance with EN 1350-1 and EC decision 96/603/EC, amended by EC Decision 2000/605/EC
3.3 Hygiene, health and the environment (BWR3)	
Influence on air quality	The product does not contain/release dangerous substances specified in TR 034, dated March 2012 0**)
3.7 Sustainable use of natural resources (BWR7)	
	No Performance Determined
3.8 General aspects related to the performance of the product	
	The angle brackets have been assessed as having satisfactory durability and serviceability when used in timber structures using the timber species described in Eurocode 5 and subject to the conditions defined by service class 1 and 2
Identification	See Annex A

*) See additional information in section 3.8 – 3.9.

**) In addition to the specific clauses relating to dangerous substances contained in this European technical Assessment, there may be other requirements applicable to the products falling within its scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the Construction Products Regulation, these requirements need also to be complied with, when and where they apply.

3.9 Methods of verification

The characteristic load-carrying capacities are based on the characteristic values of the connectors and the steel plates.

According to EN 1990 (Eurocode – Basis of design) paragraph 6.3.5 the design value of load-carrying capacity can be determined by reducing the characteristic values of the load-carrying capacity with different partial factors.

Therefore, to obtain design values according to the Eurocodes or appropriate national codes of practice, the capacities have to be multiplied with different partial factors for the material properties and – for the connectors mounted in wood – also the coefficient k_{mod} that takes into account the load duration class.

Thus, the characteristic values of the load-carrying capacity are determined also for timber failure $F_{Rk,H}$ (obtaining the embedment strength of connectors subjected to shear or the withdrawal capacity of the most loaded connector, respectively) as well as for steel plate failure $F_{Rk,S}$. The design value of the load-carrying capacity is the smaller value of both load-carrying capacities.

$$F_{Rd} = \min \left\{ \frac{k_{mod} \cdot F_{Rk,H}}{\gamma_{M,H}}; \frac{F_{Rk,S}}{\gamma_{M,S}} \right\}$$

Therefore, for timber failure the load duration class and the service class are included. The different partial factors γ_M for steel or timber, respectively, are also correctly taken into account.

3.10 Mechanical resistance and stability

See annex B for the characteristic load-carrying capacity in the different directions F_1 to F_7 .

The characteristic capacities of the angle brackets are determined by calculation assisted by testing as described in the EOTA Guideline 015 clause 5.1.2. They should be used for designs in accordance with Eurocode 5 or a similar national Timber Code.

No performance has been determined in relation to ductility of a joint under cyclic testing. The contribution to the performance of structures in seismic zones, therefore, has not been assessed.

No performance has been determined in relation to the joint's stiffness properties - to be used for the analysis of the serviceability limit state.

3.11 Aspects related to the performance of the product

3.11.1 Corrosion protection in service class 1 and 2.

In accordance with ETAG 015 the angle brackets are made from steel DD 11 according to EN 10111 with a minimum yield strength of $R_{el} \geq 251 \text{ N/mm}^2$.

3.12 General aspects related to the fitness for use of the product

BB KR angle brackets are manufactured in accordance with the provisions of this European Technical Assessment using the manufacturing processes as identified in the inspection of the plant by the notified inspection body and laid down in the technical documentation.

The nailing pattern used shall be either the maximum or the minimum pattern as defined in Annex B.

The following provisions concerning installation apply:

There shall be nails or screws in all holes or at least in holes as specified on technical drawings in accordance with this document.

All minimum spacing's and edge/end distances in accordance with Eurocode 5 or an appropriate national code shall be complied with.

The angle bracket connection shall be designed in accordance with Eurocode 5 or an appropriate national code.

The cross section of the connected wooden elements shall have a plane surface against the whole angle bracket.

Nails or screws to be used shall have a diameter which fits the holes of the angle brackets.

The structural members – the components 1 and 2 - to which the brackets are fixed shall be:

- Restrained against rotation. At a load F_2/F_3 and F_4/F_5 , the timber component is allowed to be restrained against rotation by the Angle brackets
- Strength class C14 or better, see section 1 of this ETA
- Free from wane under the bracket.
- The actual end bearing capacity of the timber member to be used in conjunction with the bracket is checked by the designer of the structure to ensure it is not less than the bracket capacity and, if

necessary, the bracket capacity reduced accordingly.

- The gap between the timber members does not exceed 3 mm.
- There are no specific requirements relating to preparation of the timber members.
- The execution of the connection shall be in accordance with the assessment holder's technical literature.

4 Attestation and verification of constancy of performance (AVCP)


4.1 AVCP system

According to the decision 97/638/EC of the European Commission¹, as amended, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) is 2+.

5 Technical details necessary for the implementation of the AVCP system, as foreseen in the applicable EAD

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at ETA-Danmark

Issued in Copenhagen on 2015-09-04 by



Thomas Bruun
Managing Director, ETA-Danmark

Annex A
Product details definitions

Table A.1 Materials specification

Bracket type	Thickness (mm)	Steel specification	Coating specification
KR 95	4,0	DD 11	55µm according to EN 1461 or galvanic zinc coating with 8µm
KR 135	4,0	DD 11	
KR 137	4,0	DD 11	
KR 285	4,0	DD 11	

Table A.2 Range of sizes

Bracket type	Height (mm)		Width (mm)	
	Min	max	min	max
KR 95	94	96	64	66
KR 135	134	136	64	66
KR 137	136	138	64	66
KR 285	284	286	64	66

Table A.3 Fastener specification

Fastener	Size (mm)			Type	Finish
	Diameter	Length	Threaded Length		
Threaded nail	4,0 / 4,4	40	30	Ringed shank nail according to EN 14592	Electroplated zinc
Screw	5,0	30	25	Self-tapping screw according to ETA 11/0190	Electroplated zinc
Screw	10,0	60	50	Self-tapping screw according to ETA 11/0190	Electroplated zinc

In the load-carrying-capacities of the connection the capacities for threaded nails calculated from the formulas of Eurocode 5 are used assuming a thick steel plate when calculating the lateral nail load-carrying-capacity.

The characteristic withdrawal capacity of the nails has to be determined by calculation in accordance with EN 1995-1-1:2004, paragraph 8.3.2 (head pull-through is not relevant):

$$F_{ax,Rk} = f_{ax,k} \times d \times t_{pen}$$

Where:

$f_{ax,k}$ Characteristic value of the withdrawal parameter in N/mm²

d Nail diameter in mm

t_{pen} Penetration depth of the profiled shank including the nail point in mm, $t_{pen} \geq 30$ mm

Based on tests by Versuchsanstalt für Stahl, Holz und Steine, University of Karlsruhe, the characteristic value of the withdrawal resistance for the threaded nails can be calculated as:

$$f_{ax,k} = 50 \times 10^{-6} \times \rho_k^2$$

Where:

ρ_k Characteristic density of the timber in kg/m³

The shape of the nail directly under the head shall be in the form of a truncated cone with a diameter under the nail head which exceeds the hole diameter.

BOLT or METAL ANCHOR diameter	Correspondent Hole diameter	Bolt or metal anchor type
10.0 mm 12.0 mm	Max. 2 mm. larger than the bolt or anchor diameter	Bolt according to EN 14592, Anchor according to ETA (see specification of the manufacturer)

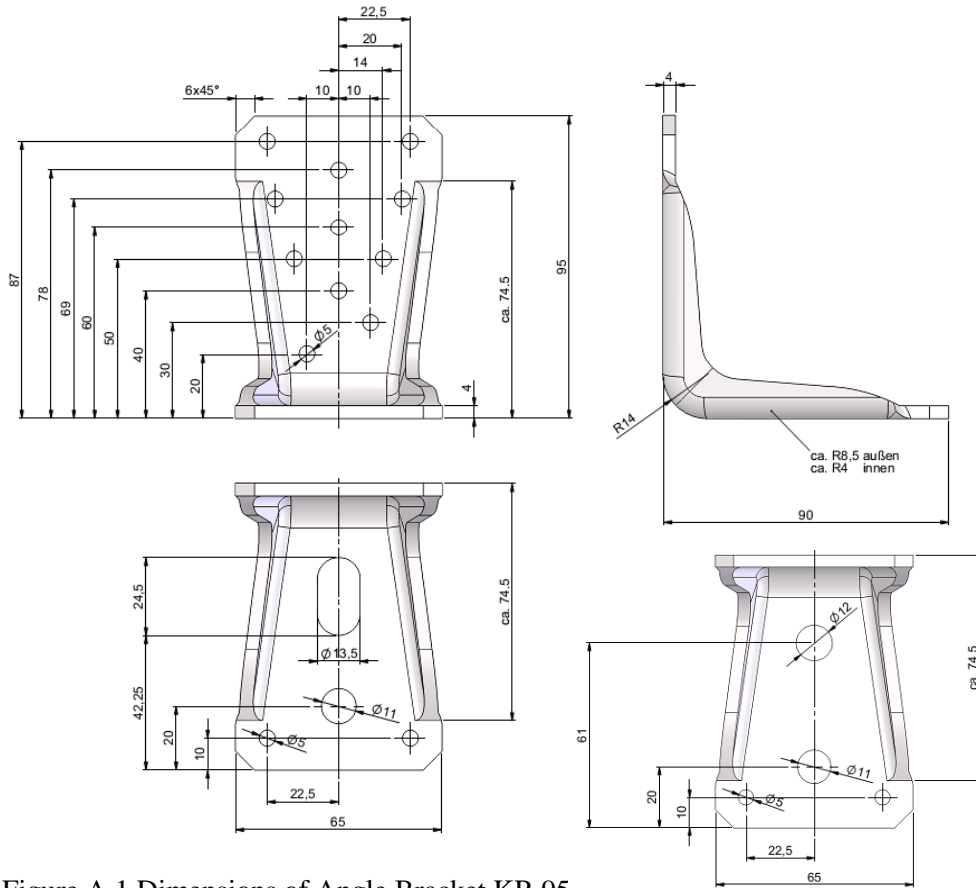


Figure A.1 Dimensions of Angle Bracket KR 95

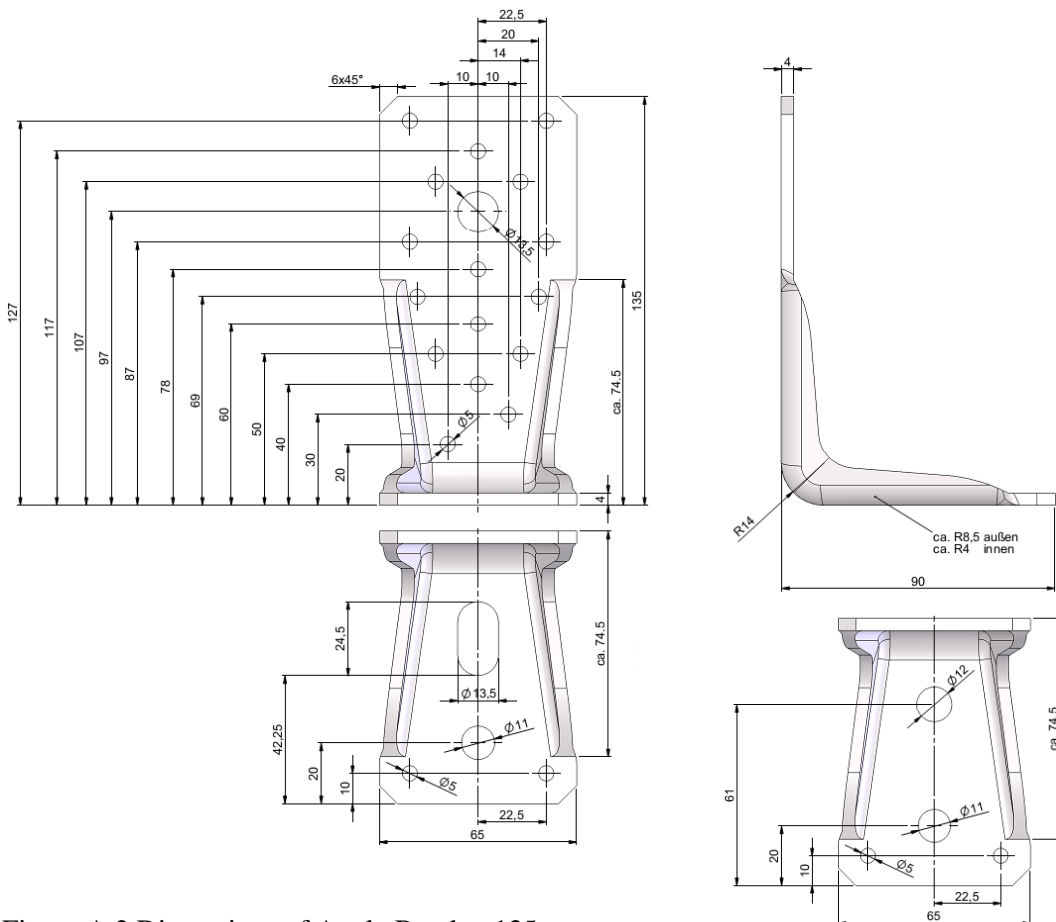


Figure A.2 Dimensions of Angle Bracket 135

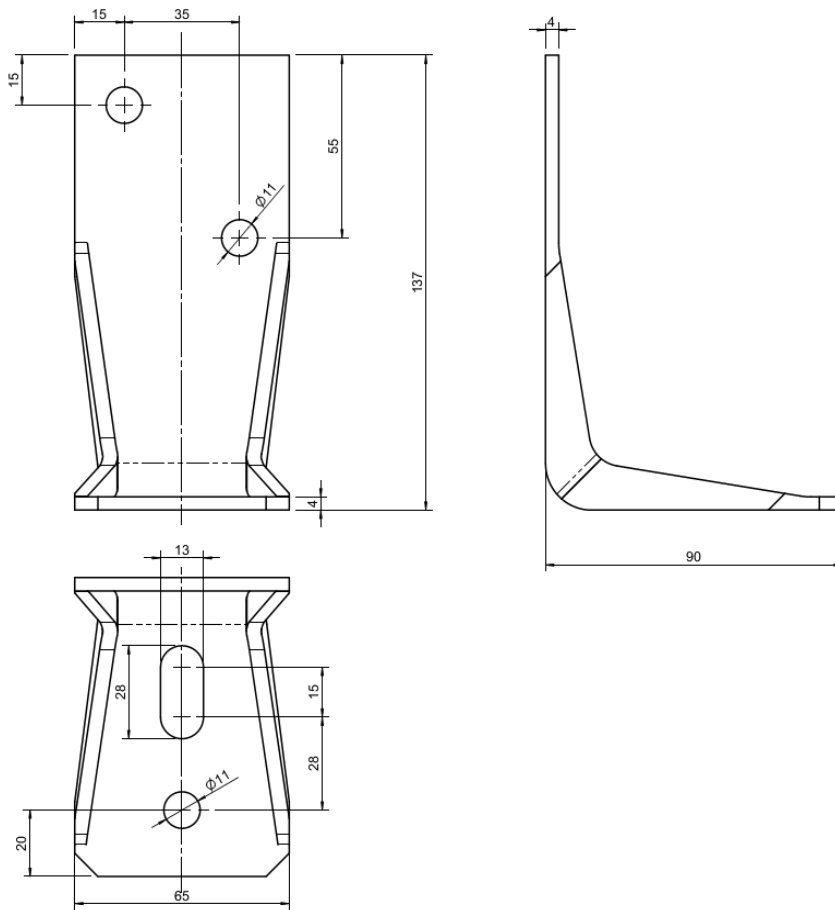


Figure A.3 Dimensions of Angle Bracket KR 137

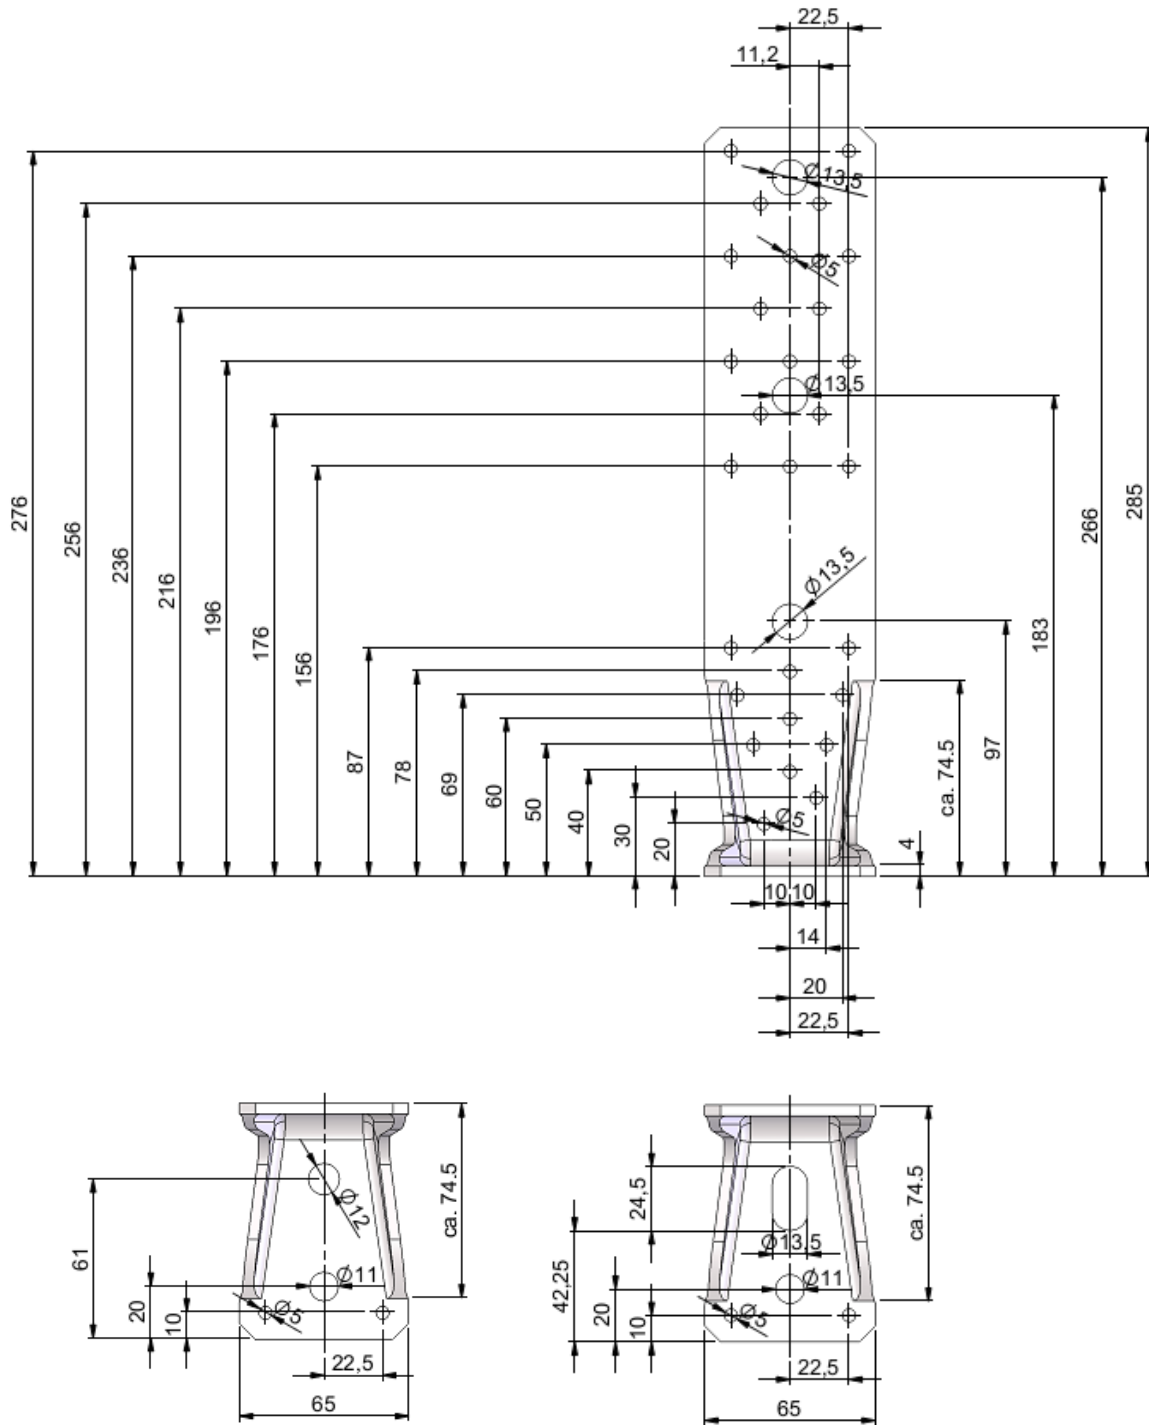


Figure A.4 Dimensions of Angle Bracket KR 285

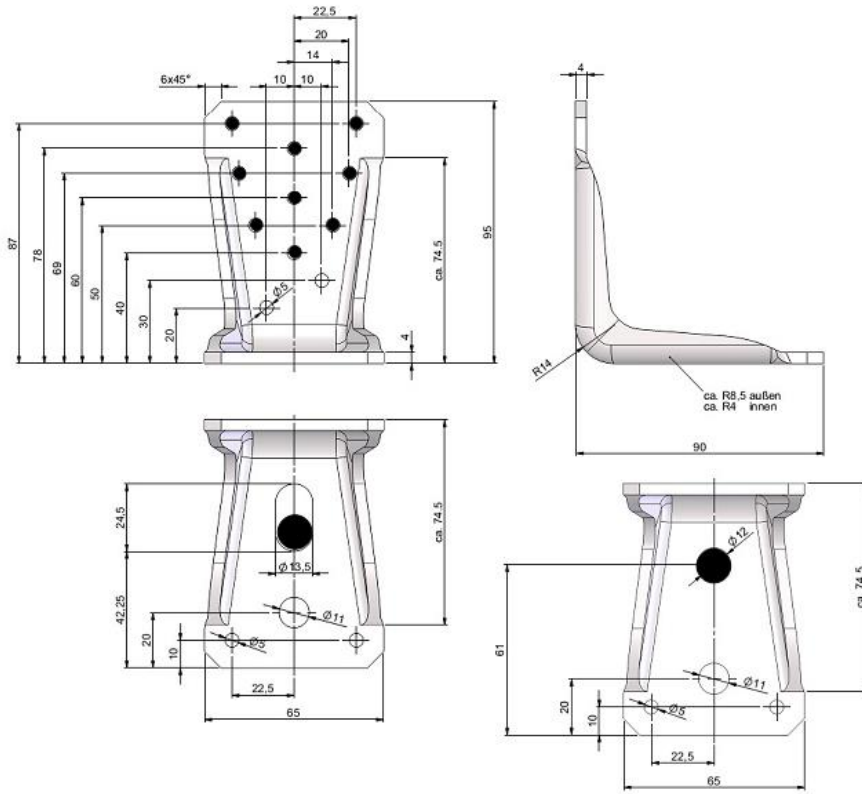


Figure A.5 Nail Patterns of Angle Bracket
KR 95 – purlin connection

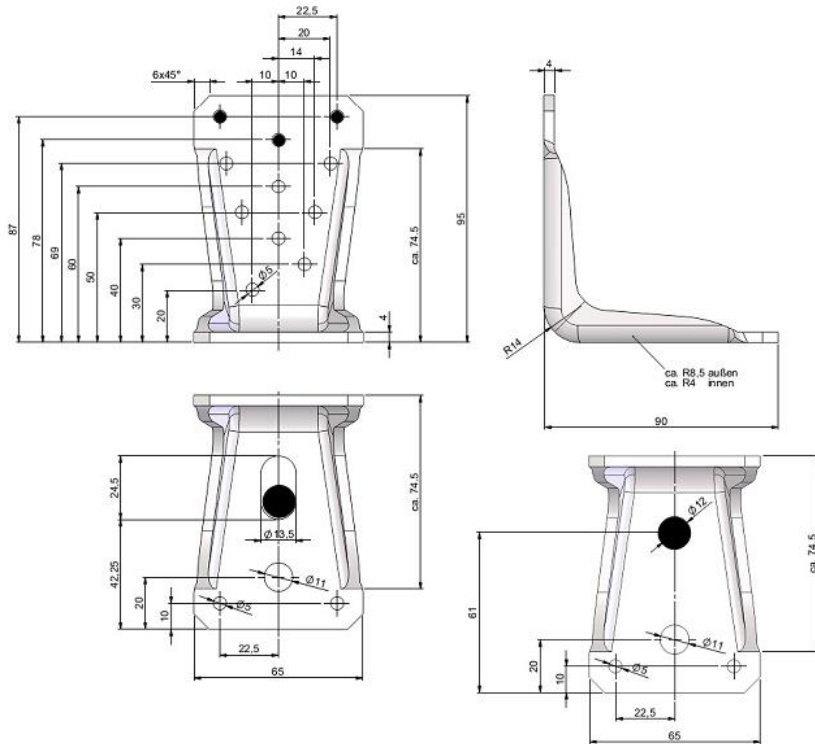


Figure A.6 Nail Patterns of Angle Bracket
KR 95 – column connection

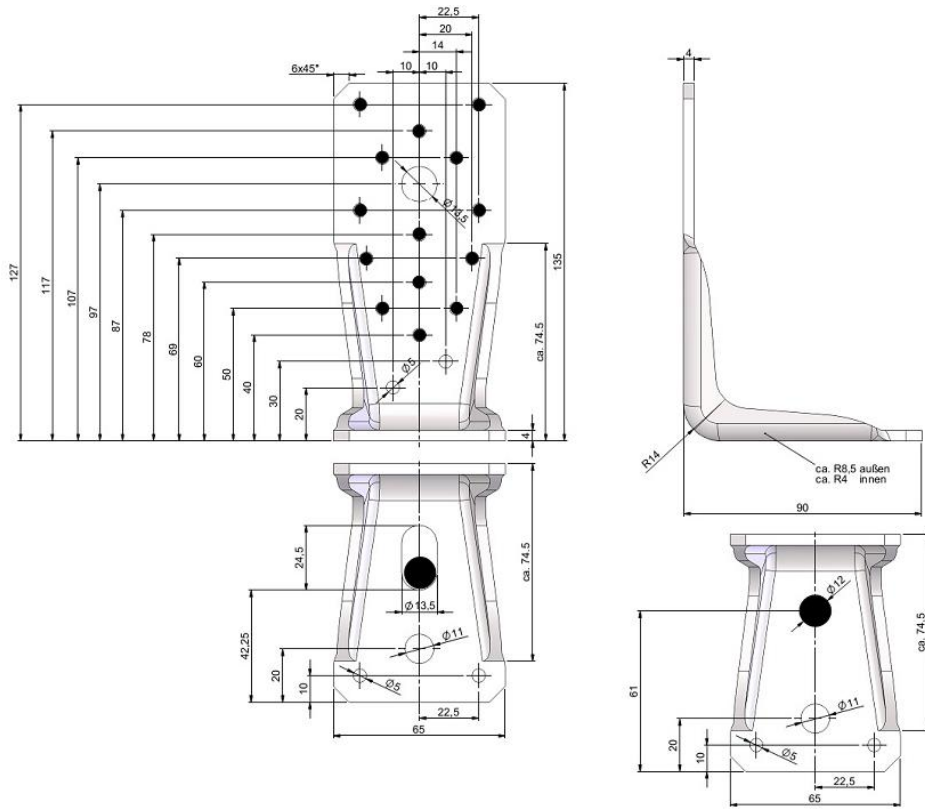


Figure A.7 Nail Patterns of Angle Bracket
KR 135 - purlin connection

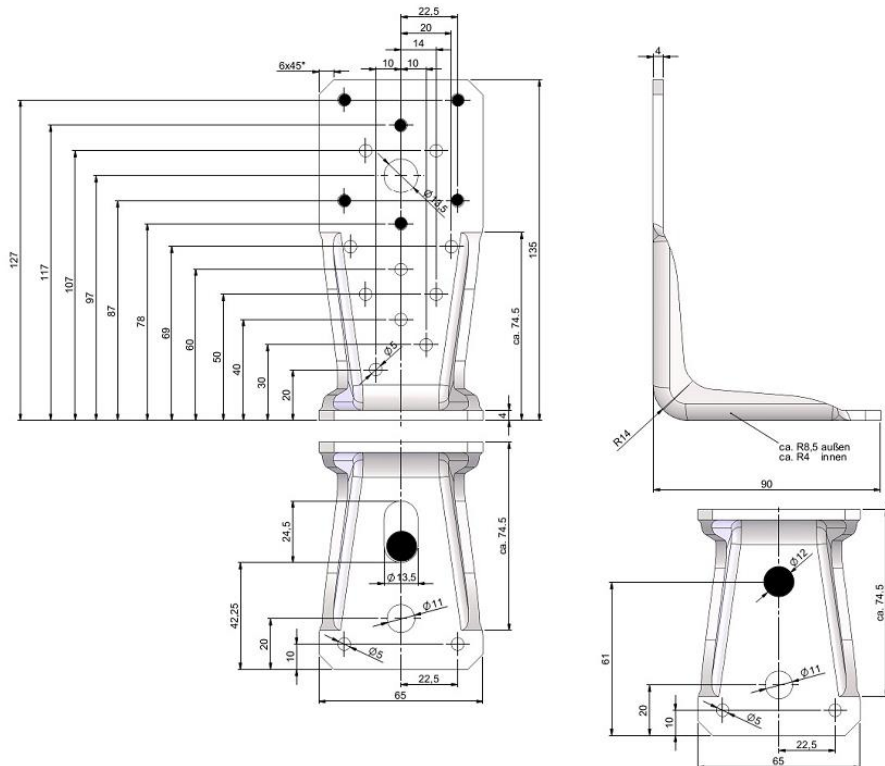


Figure A.8 Nail Patterns of Angle Bracket
KR 135 - column connection

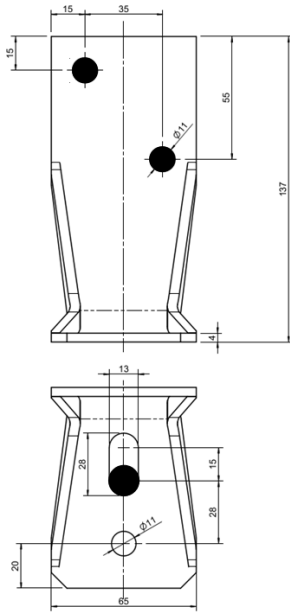


Figure A.9 Nail patterns of Angle Bracket KR 137

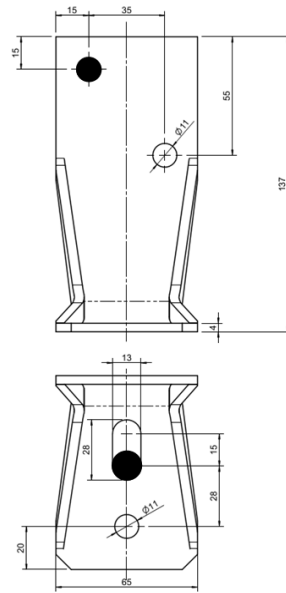


Figure A.10 Nail patterns of Angle Bracket

KR 137

- Purlin -

- Column -

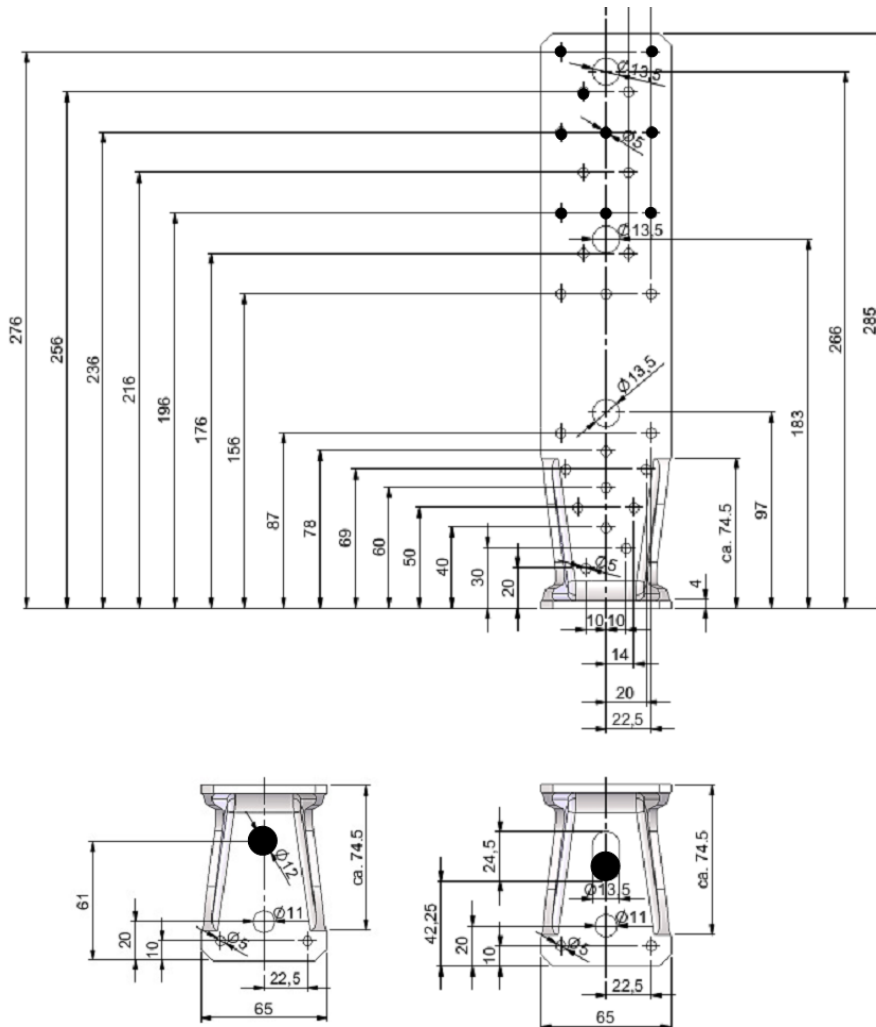


Figure A.11 Nail Patterns of Angle Bracket KR 285 - column connection

Annex B Characteristic load-carrying capacities

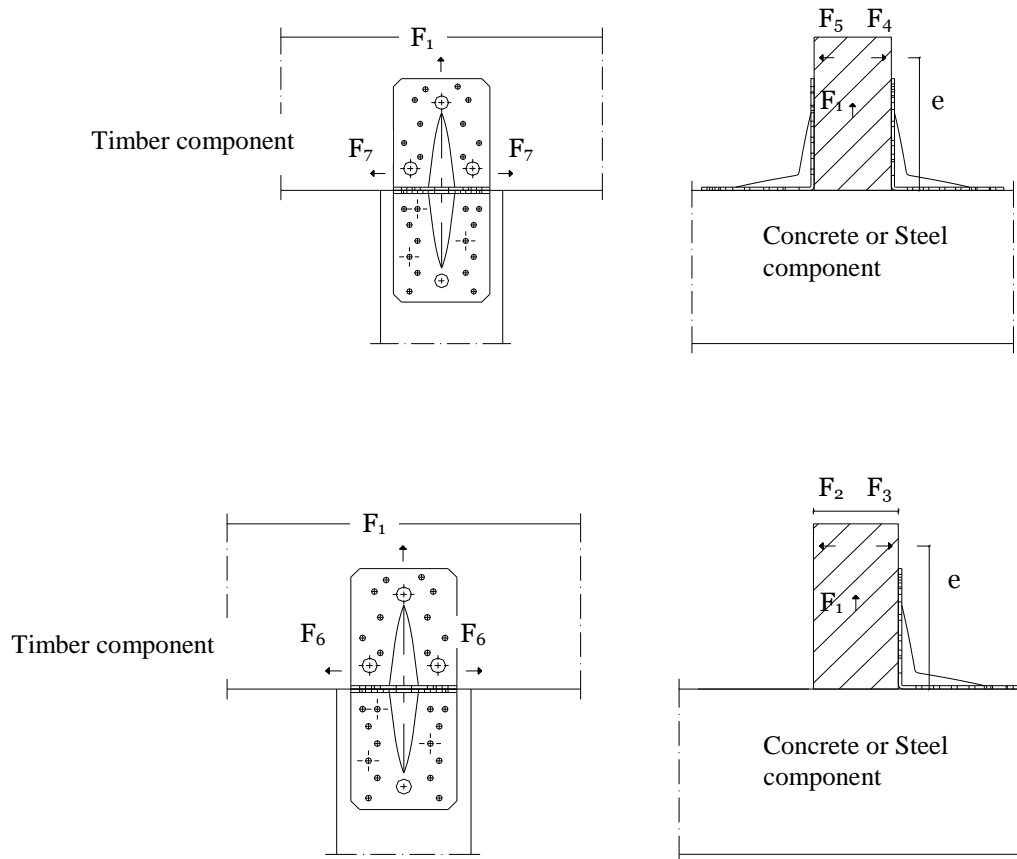


Figure B.1 Definitions of forces, their directions and eccentricity for timber to concrete and timber to steel connections

Fastener specification

Holes are marked with numbers referring to the nailing pattern in Annex A.

Double angle brackets per connection

The angle brackets must be placed symmetrically to the component axis.

Acting forces

- F_1 Lifting force acting along the central axis of the joint.
- F_4 and F_5 Lateral force acting perpendicular to the central axis of timber component. If the load is applied with an eccentricity e , a design for combined loading is required.
- F_6 Lateral force acting in the timber component direction.

Single angle bracket per connection

Acting forces

- F_1 Lifting force acting in the central axis of the angle bracket. The timber component shall be prevented from rotation. If the timber component is prevented from rotation the load-carrying capacity will be half of a connection with double angle brackets.
- F_2 and F_3 Lateral force acting perpendicular to the central axis of timber component in the distance e to the joint. F_2 is the lateral force away from the angle bracket, F_3 is the lateral force towards the angle bracket
- F_7 Lateral force acting in the timber component direction. The timber component shall be prevented from rotation. The load-carrying capacity will be half of a connection with double angle brackets.

Wane

Wane is not allowed, the timber has to be sharp-edged in the area of the angle brackets.

Timber splitting

For the lifting force F_1 it must be checked in accordance with Eurocode 5 or a similar national Timber Code that splitting will not occur.

Combined forces

If the forces F_1 , F_2/F_3 and F_7 act at the same time to a single angle bracket connection, the following inequality shall be fulfilled:

$$\left(\frac{F_{1,d}}{F_{Rd,1}}\right)^2 + \left(\frac{F_{2,d}}{F_{Rd,2}}\right)^2 + \left(\frac{F_{3,d}}{F_{Rd,3}}\right)^2 + \left(\frac{F_{7,d}}{F_{Rd,7}}\right)^2 \leq 1$$

If the forces F_1 , F_4/F_5 and F_6 act at the same time to a double angle bracket connection, the following inequality shall be fulfilled:

$$\left(\frac{F_{1,d}}{F_{Rd,1}}\right)^2 + \left(\frac{F_{4,d}}{F_{Rd,4}}\right)^2 + \left(\frac{F_{5,d}}{F_{Rd,5}}\right)^2 + \left(\frac{F_{6,d}}{F_{Rd,6}}\right)^2 \leq 1$$

The forces F_2 and F_3 or F_4 and F_5 are forces with opposite direction. Therefore only one force F_2 or F_3 , respectively, and F_4 or F_5 , respectively, is able to act simultaneously with F_1 , F_6 or F_7 , while the other shall be set to zero.

If the load F_4/F_5 is applied with an eccentricity e , a design for combined loading for connections with double angle brackets is required. Here, an additional force ΔF_1 has to be added to the existing force F_1 .

$$\Delta F_{1,d} = F_{4,d} / F_{5,d} \cdot \frac{e}{B}$$

B is the width of the timber component.

Load-carrying capacities with 1 or 2 angle brackets per connection

Table B.1: Characteristic values in the F1a - purlin, 1 angle bracket / connection

Angle Bracket	Number of nails	$F_{1a,k}$ in kN	k_t
KR 95	9	13,7	2,85
KR 135	14	21,2	
KR 137	2	10,9	

Table B.2: Characteristic values in the F1b - column, 1 angle bracket / connection

Angle Bracket	Number of nails	$F_{1b,k}$ in kN	k_t
KR 95	3	4,6	2,85
KR 135	6	9,1	
KR 137	1	2,9	
KR 285	9	13,7	

Table B.3: Characteristic values in the F1a - purlin, 2 angle brackets / connection

Angle Bracket	Number of nails	$F_{1a,k}$ in kN	k_t
KR 95	9	27,4	1,43
KR 135	14	42,4	
KR 137	2	21,9	

Table B.4: Characteristic values in the F1b - column, 2 angle brackets / connection

Angle Bracket	Number of nails	$F_{1b,k}$ in kN	k_t
KR 95	3	9,2	1,43
KR 135	6	18,3	
KR 137	1	11,5	
KR 285	9	27,5	

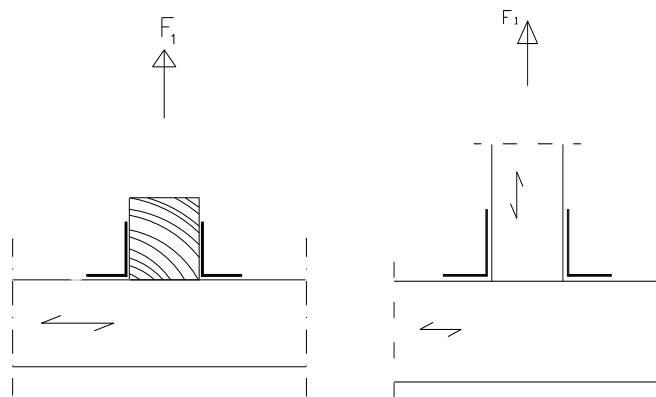


Figure B.2 Load F_1 , purlin (left) and column (right)

Table B.5: Characteristic values in the F2 for KR 95, 1 angle bracket / connection

KR 95			
	$F_{2,Rk}$ in kN		
	H in m		
B in m	0,12	0,14	0,18
0,06	4,29	4,58	4,68
0,10	3,72	3,81	3,98
0,14	3,56	3,61	3,70

Table B.6: Factor k_t for angle bracket KR 95 force F2

KR 95			
	k_t		
	H in m		
B in m	0,12	0,14	0,18
0,06	2,16	2,24	2,44
0,10	2,05	2,08	2,15
0,14	2,01	2,03	2,07

Table B.7: Characteristic values F2 for KR 135, 1 angle bracket / connection

KR 135			
	$F_{2,Rk}$ in kN		
	H in m		
B in m	0,16	0,18	0,22
0,06	4,45	4,94	5,03
0,10	3,91	3,98	4,06
0,14	3,73	3,77	3,83

Table B.8: Factor k_t for angle bracket KR 135 force 2

KR 135			
	k_t		
	H in m		
B in m	0,16	0,18	0,22
0,06	1,94	2,82	4,50
0,10	2,02	2,06	2,04
0,14	1,94	1,97	2,02

Table B.9: Characteristic values F2 for KR 137, 1 angle bracket / connection

KR 137			
	F _{2,Rk} in kN		
	H in m		
B in m	0,16	0,18	0,22
0,06	3,83	3,73	3,95
0,10	3,45	3,55	3,71
0,14	3,71	3,34	3,44

Table B.10: Factor k_t for angle bracket KR 137 force 2

KR 137			
	k _t		
	H in m		
B in m	0,16	0,18	0,22
0,06	1,70	1,73	2,04
0,10	1,61	1,63	1,65
0,14	1,65	1,59	1,61

Table B.11: Characteristic values F3 for KR 95, 1 angle bracket / connection

KR 95		
H in m	F _{3,Rk} in kN	
	Steel	Timber
0,12	1,15	2,06
0,14	0,90	1,35
0,18	0,62	0,79

Table B.12: Characteristic values F3 for KR 135, 1 angle bracket / connection

KR 135	
H in m	F _{3,Rk} in kN
	Steel
0,16	1,24
0,18	0,94
0,22	0,48

Table B.13: Characteristic values F3 for KR 137, 1 angle bracket / connection

KR 137	
H in m	F _{3,Rk} in kN
	Steel
0,16	0,65
0,18	0,53
0,22	0,38

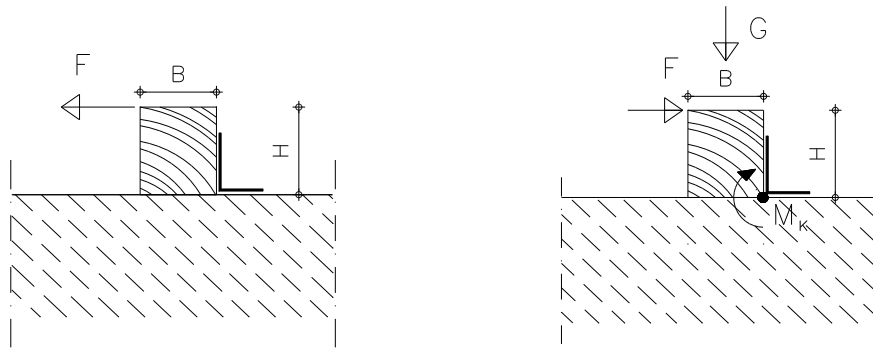


Figure B.3 Load F_2 (left) and Load F_3 (right)

Table B.14: Characteristic values for Force F_4/F_5

Angle Bracket	$F_{4/5,Rk}$ in kN
KR 95	7,58
KR 135	7,99
KR 137	8,57

For different purlin widths and depths, the interaction equations were evaluated. The results are given in the tables 15 and 16.

Table B.15: Characteristic values F_4/F_5 for KR 95

KR 95			
	$F_{4,5Rk}$ in kN		
	H in m		
B in m	0,12	0,14	0,18
0,06	6,63	6,37	5,83
0,10	7,19	7,07	6,79
0,14	7,38	7,31	7,14

Table B.16: Characteristic values F_4/F_5 for KR 135

KR 135			
	$F_{4/5,Rk}$ in kN		
	H in m		
B in m	0,16	0,18	0,22
0,06	7,14	6,96	6,57
0,10	7,65	7,57	7,38
0,14	7,81	7,77	7,66

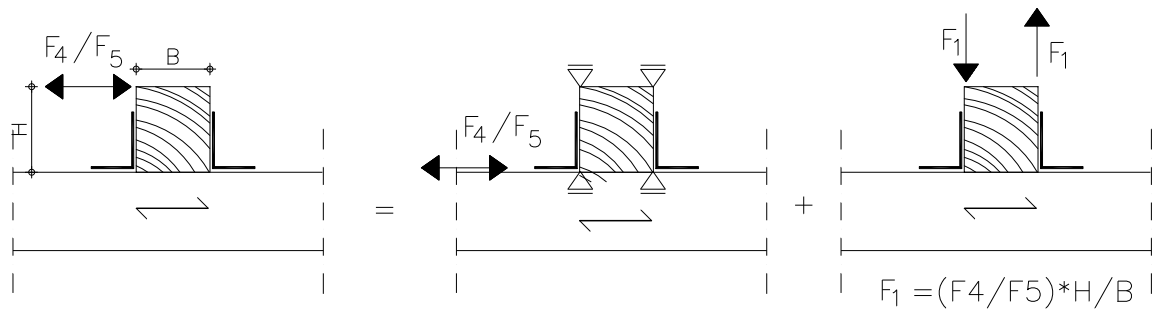


Figure B.4 Load Case F_4/F_5 reduced to two basic load cases

Table B.17: Characteristic values F_6 (1 angle bracket / connection) and F_7 (2 angle brackets / connection)

Angle Bracket	$F_{6,Rk}$ in kN	$F_{7,Rk}$ in kN
KR 95	1,72	3,44
KR 135	2,76	5,53
KR 137	2,14	4,28