





SPIT FIX II lynanker Elforsinket

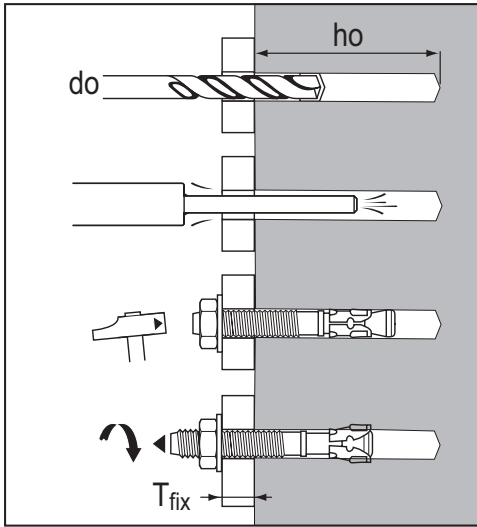

ETA 01/0008 Opsjon 7  

Bruksområde: gjennomstikksanker til betong.
Leveres med mutter og skive.

Hvor kan den brukes	Hva kan den bære (belastning)	Hvordan skal den monteres																												
	Maks. anbefalt belastning: Uttreks last v. min montasjedybde  <table><tr><td></td><td>1,50 kN</td><td>2,70 kN</td><td>3,80 kN</td><td>8,70 kN</td><td>14,30 kN</td><td>16,70 kN</td></tr><tr><td></td><td>M6</td><td>M8</td><td>M10</td><td>M12</td><td>M16</td><td>M20</td></tr></table> Maks. anbefalt belastning: Skjær last  <table><tr><td></td><td>2,00 kN</td><td>3,00 kN</td><td>8,90 kN</td><td>14,60 kN</td><td>17,40 kN</td><td>38,00 kN</td></tr><tr><td></td><td>M6</td><td>M8</td><td>M10</td><td>M12</td><td>M16</td><td>M20</td></tr></table>		1,50 kN	2,70 kN	3,80 kN	8,70 kN	14,30 kN	16,70 kN		M6	M8	M10	M12	M16	M20		2,00 kN	3,00 kN	8,90 kN	14,60 kN	17,40 kN	38,00 kN		M6	M8	M10	M12	M16	M20	
	1,50 kN	2,70 kN	3,80 kN	8,70 kN	14,30 kN	16,70 kN																								
	M6	M8	M10	M12	M16	M20																								
	2,00 kN	3,00 kN	8,90 kN	14,60 kN	17,40 kN	38,00 kN																								
	M6	M8	M10	M12	M16	M20																								

Anbefalt maks. belastningsverdier: i betong 20 mPa

Ved urevnet betong (1 kN ~ 100 kg):

Dim.	Bor diameter do	Boreddybde mm ho*	Uttreks last N rec - kN	Skjær last V rec - kN	Tiltrekk T inst. - Nm
M6	6	41	1,50	2,00	10
M8	8	52	2,70	3,00	15
M10	10	62	3,80	8,90	30
M12	12	75	8,70	14,60	50
M16	16	95	14,30	17,40	100
M20	20	110	16,70	38,00	160

*) ho + emnetykkelse

Ved maks. montasjedybde (1 kN ~ 100 kg):

Dim.	Bor diameter do	Boreddybde mm ho*	Uttreks last N rec - kN	Skjær last V rec - kN	Tiltrekk T inst. - Nm
M6	6	41	1,50	2,00	10
M8	8	65	4,00	3,00	15
M10	10	72	4,70	8,90	30
M12	12	93	9,50	14,60	50
M16	16	117	19,20	17,40	100
M20	20	136	25,00	38,00	160


*) ho + emnetykkelse

Sortiment

Best.nr.	NOBB nr.	Dimensjon mm	Antall
050510	43197681	M6 x 10/45	100
050520	43197696	M6 x 20/55	100
050530	30253751	M6 x 50/85	100
056760	42237977	M8 x 5/55	100
056410	30253777	M8 x 20/70	100
056420	30253785	M8 x 40/90	50
056430	30253793	M8 x 80/30	50
050436	30253819	M10 x 5/65	50
056530	30253827	M10 x 15/75	50
056540	30253835	M10 x 36/95	50
050375	30253843	M10 x 60/120	25
056550	30253850	M10 x 80/140	25
055334	43179163	M12 x 5/80	25
055335	43179178	M12 x 25/100	25
055392	43457237	M12 x 40/115	25
056590	30253892	M12 x 65/140	25
050377	30253900	M12 x 85/160	25
056650	30253918	M12 x 105/180	25
056660	30254544	M12 x 145/220	25
050378	30253926	M16 x 5/100	25
056700	30253934	M16 x 30/125	25
050379	30253942	M16 x 55/150	10
056710	30253959	M16 x 75/170	10
050382	30253967	M20 x 10/120	10
056730	30253975	M20 x 50/160	10
056740	30253983	M20 x 105/225	10

De angitte belastningsverdiene er veiledende og må ikke brukes som dokumentasjon. For dokumentasjon skal SPIT Fixing Design Guide brukes, kontakt evt. vår tekniske avdeling for ytterligere veiledning.

M6 x 45 / 10



Sikkerhetsfaktor: Iht. SPIT Fixing Design Guide

Tung montasje