


# Channel FLS

The flexible channel system for light applications

2b



Air duct fixing with channel

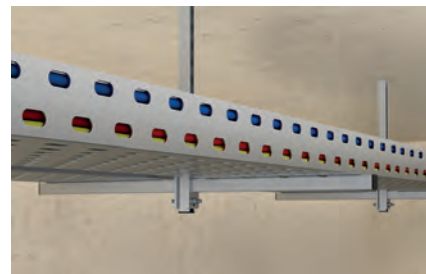

Suspended cable tray fixing

## Applications

- The U-profile channels enable the creation of secure, horizontal and vertical installations.
- The channel system is suitable for fast and efficient fixings of pipelines and supporting structures.

## Certificates



Fire resistance classification  
R120



MLAR R30


## Advantages/Benefits

- The fire inspection report in line with MLAR/EN1363-1 of the FLS 37 guarantees independently tested functional safety.
- The channel shape with edge seams gives a perfect fit for the connector elements and leads to a safe and easy installation.
- The serration with stamped teeth in the mounting channel gives the sliding nuts a secure hold to bear high shear loads.
- The scale on the channels simplifies the cutting of the channels and the positioning of the connector elements during installation.
- The alternating long slots in the channel enable the optimised fixing to the substrate with the perfect fixtures.


## Properties

- Material: pre-galvanised steel S-250-GD+Z275 (material no.: 1.0242) acc. to DIN EN 10346


## Installation FLS

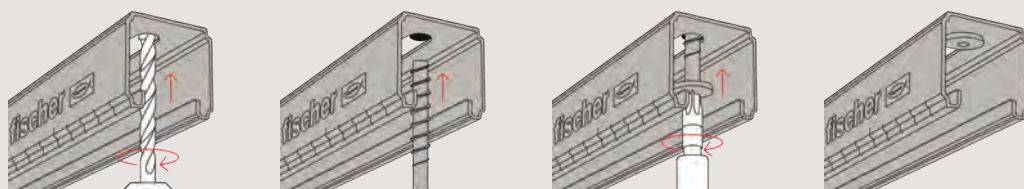


## Technical data



FLS 17/1.0

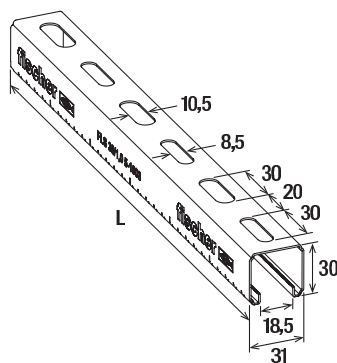


FLS 30/1.0

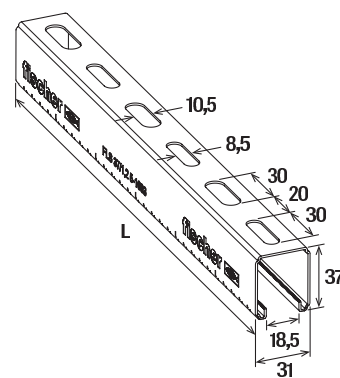

FLS 37/1.2


Item	Item No.	Fire test report	Thickness S [mm]	Length L [mm]	Sales unit [pcs]
FLS 17/1.0 - 2 m	538753	—	1.0	2000	10
FLS 17/1.0 - 3 m	538754	—	1.0	3000	8
FLS 30/1.0 - 2 m	538755	—	1.0	2000	10
FLS 30/1.0 - 3 m	538756	—	1.0	3000	8
FLS 37/1.2 - 2 m	538757	X	1.2	2000	10
FLS 37/1.2 - 3 m	538758	X	1.2	3000	8
FLS 37/1.2 - 6 m	538759	X	1.2	6000	1

## Loads




Item	Item No.	Weight [kg/m]	Profile cross section [cm <sup>2</sup> ]	Moment of inertia I <sub>y</sub> [cm <sup>4</sup> ]	Moment of inertia I <sub>z</sub> [cm <sup>4</sup> ]	Section modulus W <sub>y</sub> [cm <sup>3</sup> ]	Section modulus W <sub>z</sub> [cm <sup>3</sup> ]	Max. rec- ommended static load for 1m length F <sub>rec</sub> [kN]
FLS 17/1.0 - 2 m	538753	0.58	0.72	0.25	0.91	0.26	0.59	0.13
FLS 17/1.0 - 3 m	538754	0.58	0.72	0.25	0.91	0.26	0.59	0.13
FLS 30/1.0 - 2 m	538755	0.78	0.98	1.02	1.46	0.64	0.94	0.48
FLS 30/1.0 - 3 m	538756	0.78	0.98	1.02	1.46	0.64	0.94	0.48
FLS 37/1.2 - 2 m	538757	1.06	1.33	2.03	2.01	1.04	1.29	0.78
FLS 37/1.2 - 3 m	538758	1.06	1.33	2.03	2.01	1.04	1.29	0.78
FLS 37/1.2 - 6 m	538759	1.06	1.33	2.03	2.01	1.04	1.29	0.78


Load case 1




Load case 2



Load case 3




FLS 17/1,0

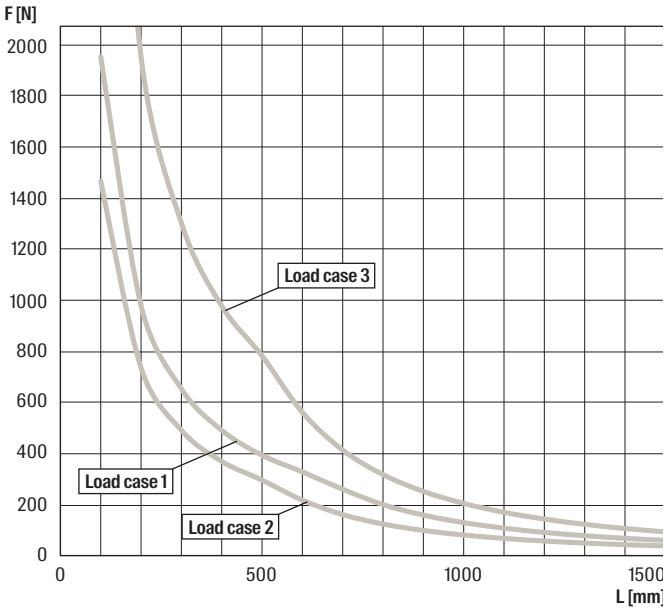


For the load curves, the permissible steel strain  $\delta_{adm.} = 188 \text{ N/mm}$  (increased steel strain due to bending) and the maximum deflection under load  $L/200$  are not exceeded. Fixings and screw fastenings must be calculated accordingly. The higher yield strength is a result of the calculation according to DIN EN 1993-1-3:2010-12, para. 3.2.2.

FLS 30/1,0

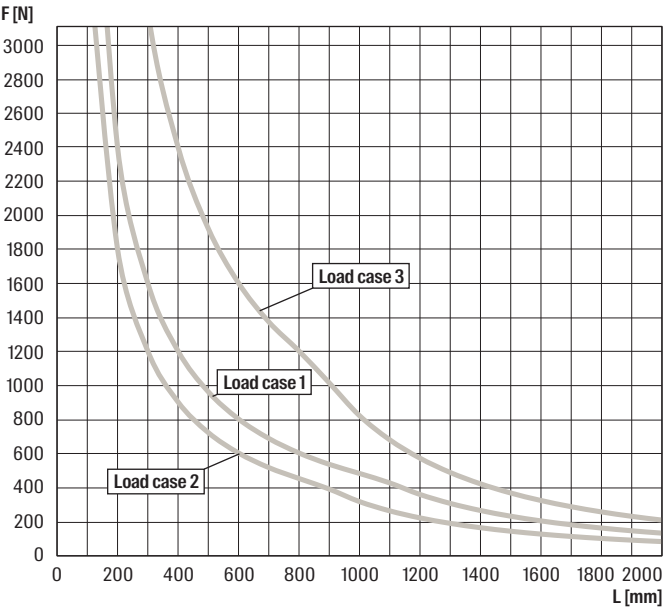

FLS 37/1,2

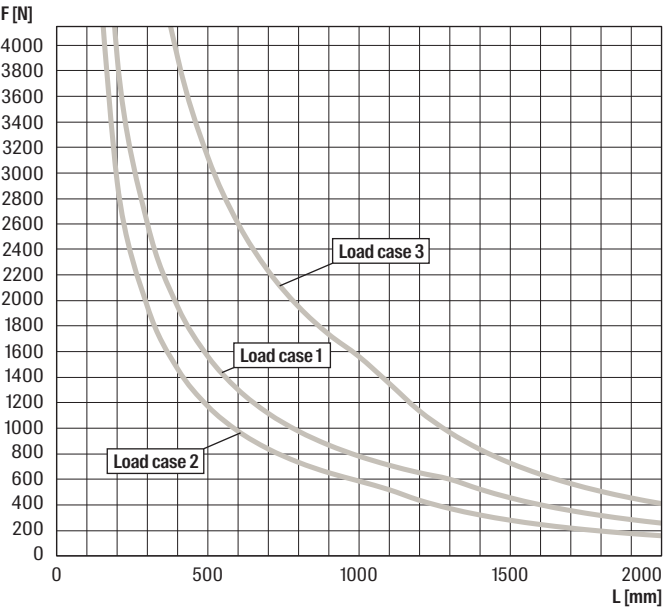

For the load curves, the permissible steel strain  $\delta_{adm.} = 188 \text{ N/mm}$  (increased steel strain due to bending) and the maximum deflection under load  $L/200$  are not exceeded. Fixings and screw fastenings must be calculated accordingly. The higher yield strength is a result of the calculation according to DIN EN 1993-1-3:2010-12, para. 3.2.2.