

Table of Contents

 FPF-ST BZP..... Page 97

 FPF-ST BZF..... Page 99

Your benefits

Chipboard screw Power-Fast bonus-zinc

- Significant higher corrosion resistance compared to conventional coating types
- For save outdoor installations
- Lasting safety with ETA conformity
- Easy to screw in thanks to the innovative fischer Power-Fast thread shape



Countersunk head

- For surface-flush screwing
- Can be easily sunk to create a clean surface finish



3

Chipboard screw Power-Fast bonus-zinc

Bonus-zinc surface refinement



- Considerably higher corrosion resistance within the salt-spray-testing compared to conventional surface coatings (1500 hrs. acc. to DIN EN ISO 9227:2006)
- Provides clear advantages for timber constructions in protected outdoor areas e.g. winter garden, carports or balustrade



Page 175

FPF-ST BZP



- Material: Steel
- Coating: Zinc flake coating
- Drive: TX-Star recess
- Thread: Partial thread
- Screw head: Countersunk head

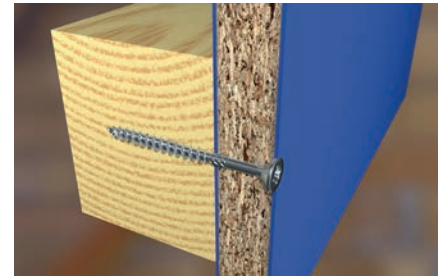

Diameter d [mm]	Length l [mm]	Partial thread length l _g [mm]	Head-Ø d _k [mm]	Drive 	Art. No.	Sales unit [pcs]	GTIN (EAN Code)
3.5	30	18	7.0	TX10	669002	200	4048962201307
	35	24	7.0	TX10	532810	500	4048962219128
	40	24	7.0	TX10	669004	200	4048962201321
	50	30	7.0	TX10	669005	200	4048962201338
4.0	30	18	8.0	TX20	669008	200	4048962201369
	35	24	8.0	TX20	669009	200	4048962201376
	40	24	8.0	TX20	669010	200	4048962201383
	40	24	8.0	TX20	669011	500	4048962201390
	45	30	8.0	TX20	669012	200	4048962201406
	60	36	8.0	TX20	669014	200	4048962201420
4.5	70	42	8.0	TX20	669015	200	4048962201437
	30	18	9.0	TX20	669018	200	4048962201468
	35	24	9.0	TX20	669019	200	4048962201475
	40	24	9.0	TX20	669020	200	4048962201482
	50	30	9.0	TX20	669021	200	4048962201499
5.0	60	36	9.0	TX20	669022	200	4048962201505
	50	30	10.0	TX25	669048	200	4048962201765
	60	36	10.0	TX25	669049	200	4048962201772
	70	42	10.0	TX25	669050	200	4048962201789
	80	50	10.0	TX25	669051	200	4048962201796
	90	60	10.0	TX25	669052	200	4048962201802
	100	60	10.0	TX20	669034	100	4048962201628
	120	70	10.0	TX20	669035	100	4048962201635
6.0	120	70	10.0	TX25	669054	100	4048962201826
	50	30	12.0	TX30	669036	200	4048962201642
	60	30	12.0	TX30	669037	200	4048962201659
	70	30	12.0	TX30	669038	200	4048962201666
	80	50	12.0	TX30	669039	200	4048962201673
	90	50	12.0	TX30	669040	200	4048962201680
	100	50	12.0	TX30	669041	100	4048962201697
	120	50	12.0	TX30	669042	100	4048962201703
	120	50	12.0	TX30	532811	25	4048962219135
6.0	160	70	12.0	TX30	669044	50	4048962201727

FPF-ST BZP


- Material: Steel
- Coating: Zinc flake coating
- Drive: TX-Star recess
- Thread: Partial thread
- Screw head: Countersunk head

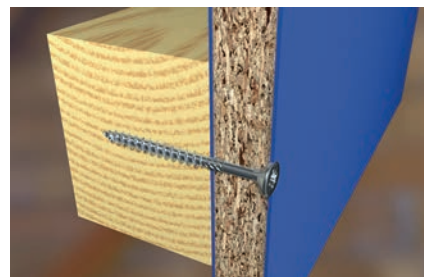

Diameter d [mm]	Length l [mm]	Partial thread length l _g [mm]	Head-Ø d _k [mm]	Drive 	Art. No.	Sales unit [pcs]	GTIN (EAN Code)
6.0	180	70	12.0	TX30	669045	50	4048962201734
	200	70	12.0	TX30	669046	50	4048962201741
	220	70	12.0	TX30	669047	50	4048962201758

FPF-ST BZF

- Material: Steel
- Coating: Zinc flake coating
- Drive: TX-Star recess
- Thread: Full thread
- Screw head: Countersunk head



Diameter d [mm]	Length l [mm]	Partial thread length l _g [mm]	Head-Ø d _k [mm]	Drive 	Art. No.	Sales unit [pcs]	GTIN (EAN Code)
3.5	15	10	7.0	TX10	532808	500	4048962219104
	25	—	7.0	TX10	669001	200	4048962201291
	25	20	7.0	TX10	532809	500	4048962219111
4.0	20	—	8.0	TX20	669006	200	4048962201345
	25	—	8.0	TX20	669007	200	4048962201352
4.5	20	—	9.0	TX20	669016	200	4048962201444
	25	—	9.0	TX20	669017	200	4048962201451