

Environmental product declaration

in accordance with ISO 14025 and EN 15804+A2

Harmonie "Formpresset" interior door with glass




HARMONIE

The Norwegian EPD Foundation

Owner of the declaration:

Harmonie Norge AS

Product:

Harmonie "Formpresset" interior door with glass

Declared unit:

1 pcs

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core PCR

NPCR 014:2019 Part B for Windows and doors

Program operator:

The Norwegian EPD Foundation

Declaration number:

NEPD-6209-5471-EN

Registration number:

NEPD-6209-5471-EN

Issue date:

05.03.2024

Valid to:

05.03.2029

ver-170624

EPD software:

LCAno EPD generator ID: 236817

General information

Product

Harmonie "Formpresset" interior door with glass

Program operator:

The Norwegian EPD Foundation
Post Box 5250 Majorstuen, 0303 Oslo, Norway
Phone: +47 977 22 020
web: www.epd-norge.no

Declaration number:

NEPD-6209-5471-EN

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core PCR
NPCR 014:2019 Part B for Windows and doors

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

Declared unit:

1 pcs Harmonie "Formpresset" interior door with glass

Declared unit with option:

A1-A3,A4,A5,B2,B4,C1,C2,C3,C4,D

Functional unit:

Painted "Formpresset" interior door with glass, dimension 1230 mm x 2180 mm (reference door based on EN 14351-1), and expected service life of 10 years.

General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Verification of each EPD is made according to EPD-Norway's guidelines for verification and approval requiring that tools are i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPD-Norway, and iii) the process is reviewed annually by an independent third party verifier. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools

Verification of EPD tool:

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPDNorway's procedures and guidelines for verification and approval of EPD tools.

Third party verifier:

Gaylord K. Booto, Norwegian Institute for Air Research (NILU)

(no signature required)

Owner of the declaration:

Harmonie Norge AS
Contact person: Paul Roman
Phone: +47 94 98 04 80
e-mail: paul@harmonie.no

Manufacturer:

Harmonie Norge AS
Borgeskogen 36
3160 Stokke, Norway

Place of production:

Harmonie prod. Romania

, Romania

Management system:

ISO 14001:2015

Organisation no:

912591743

Issue date:

05.03.2024

Valid to:

05.03.2029

Year of study:

2022

Comparability:

EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

Development and verification of EPD:

The declaration is created using EPD tool lca.tools ver EPD2022.03, developed by LCA.no. The EPD tool is integrated in the company's management system, and has been approved by EPD Norway. NEPDT69

Developer of EPD: Solmaz Atarodi

Reviewer of company-specific input data and EPD: Paul Roman

Approved:



Håkon Hauan, CEO EPD-Norge

Product

Product description:

Harmonie "Formpresset" interior door used on walls in residential and non-residential constructions.

Product specification

This EPD applies to an interior door with painted surfaces. The door size is 1230 mm x 2180 mm.

| Materials | kg | % |
|------------------------------------|--------------|---------------|
| Cardboard | 0,25 | 0,83 |
| Glass | 19,18 | 62,79 |
| Glue for wood | 0,12 | 0,38 |
| Metal - Steel | 0,27 | 0,88 |
| Paint, water-based | 0,21 | 0,70 |
| Plastic - Polyvinyl chloride (PVC) | 1,63 | 5,35 |
| Silicon products | 0,10 | 0,33 |
| Wood - Fibreboard | 8,78 | 28,74 |
| Total | 30,54 | 100,00 |

| Packaging | kg | % |
|------------------------------|--------------|---------------|
| Packaging - Plastic | 0,01 | 1,09 |
| Packaging - Wood | 0,91 | 98,91 |
| Total incl. packaging | 31,46 | 100,00 |

Technical data:

Interior door with honeycomb core, HDF skin, 4mm glass, one lock and two hinges. The thickness of doorleaf is 40 mm. The total weight of the product is 30.54 kg and the packaging average weight is 0.92 kg. Area of function unit is 2.68 m². The product are available in the majority of NCS S / RAL color palettes.

Market:

Scandinavian countries, but scenarios beyond cradle-to-gate are based on the situation in the Norwegian market.

Reference service life, product

10 years

Reference service life, building or construction works

60 years.

LCA: Calculation rules

Declared unit:

1 pcs Harmonie "Formpresset" interior door with glass

Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis. The PCR specific background data follow the allocation rules in the Ecoinvent v3.7.1 Cut-off database version. The allocation of water, energy and waste flows within the production facilities for windows and doors follows unit-based allocation adjusted with a point system to different product groups or products. This score system is regulated by a factor which increases with the resource intensity of each product. The unit-based allocation is adjusted by the weight of the product, excluding the weight of glass.

Data quality:

Specific data for the product composition are provided by the manufacturer. The data represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on EPDs according to EN 15804 and different LCA databases. The data quality of the raw materials in A1 is presented in the table below.


| Materials | Source | Data quality | Year |
|------------------------------------|------------------------|---------------------|-------------|
| Cardboard | Modified ecoinvent 3.6 | Database | 2019 |
| Glass | ecoinvent 3.6 | Database | 2019 |
| Glue for wood | ecoinvent 3.6 | Database | 2019 |
| Metal - Steel | ecoinvent 3.6 | Database | 2019 |
| Packaging - Plastic | ecoinvent 3.6 | Database | 2019 |
| Packaging - Wood | ecoinvent 3.6 | Database | 2019 |
| Paint, water-based | ecoinvent 3.7.1 | Database | 2020 |
| Plastic - Polyvinyl chloride (PVC) | ecoinvent 3.6 | Database | 2019 |
| Silicon products | ecoinvent 3.6 | Database | 2019 |
| Wood - Fibreboard | ecoinvent 3.6 | Database | 2019 |

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

| Product stage | | | Construction installation stage | | Use stage | | | | | | | End of life stage | | | | Beyond the system boundaries |
|---------------|-----------|---------------|---------------------------------|----------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|----------------------------|-----------|------------------|----------|------------------------------------|
| Raw materials | Transport | Manufacturing | Transport | Assembly | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De-construction demolition | Transport | Waste processing | Disposal | Reuse-Recovery-Recycling-potential |
| A1 | A2 | A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
| X | X | X | X | X | MND | X | MND | X | MND | MND | MND | X | X | X | X | X |

System boundary:

According to the standard NS-EN 15804:2012+A2:2019, NPCR PART A (construction products and services), and NPCR 014 (Part B for windows and doors), the system boundary is cradle to grave and module D.

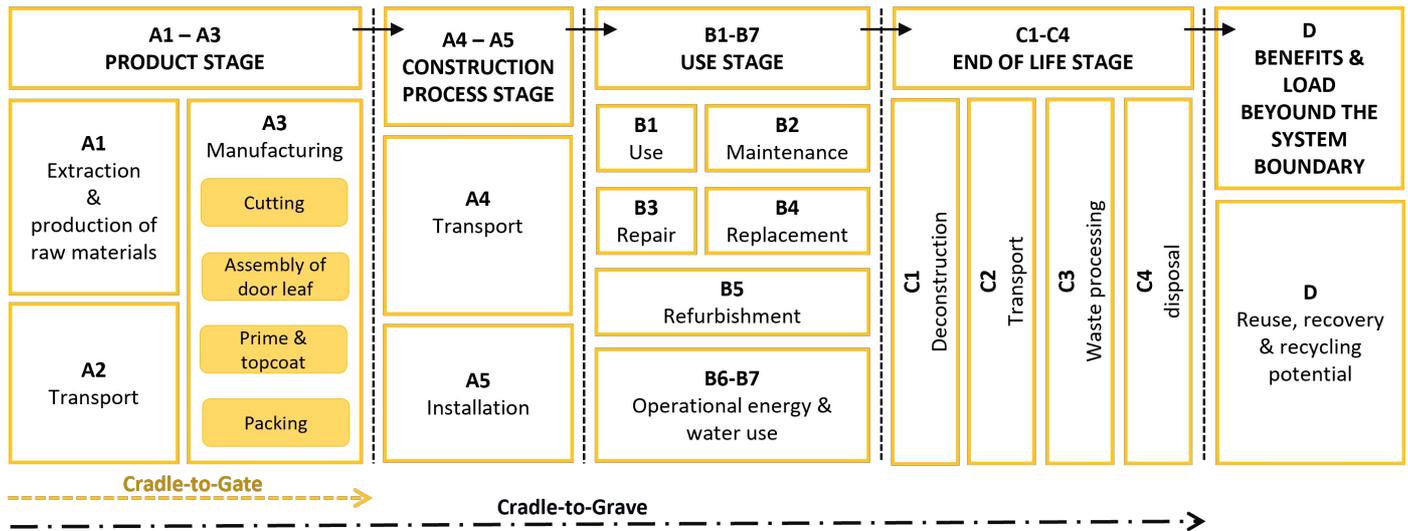

Additional technical information:

For the products with different sizes from the declared unit, the environmental impacts must be converted by using a conversion factor. The Norwegian EPD Foundation has published instructions on how to interpret EPDs for Windows on its website (www.epdnorge.no) where different calculation methods have been stated. (Document: Bruksanvisning i hvordan tolke EPD'er - Vinduer).

LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

A4- Transport

Based on information from the manufacturer, the transportation scenario for the final packed product from the manufacturer to the construction site is as the following: from the factory in Romania to the warehouse in Stokke, Norway: 452 km by Euro 6- medium truck, 1376 km by train, 99 km by boat, and 568 km by Euro 6- medium truck.

The average transportation distance from the warehouse to the installation site is assumed 50 km by medium truck.

A5- Assembly

According to the report from EPD-Norge Harmonising the documentation of scenarios beyond cradle to gate, EN 15804 there is no loss on-site during construction activities. Since painting and surface treatment are done before installation, installation materials are negligible and not included in this assessment. Energy consumption during installation can be varied depending on the floor, type of building, and several other unknown parameters, and therefore ignored in the calculation. So, the installation module includes waste treatment of packaging waste.

The contribution from auxiliary materials used for installation, e.g., fixings, sealants, and insulation materials, is commonly considered to be within the cut-off criteria (6.3.4.3 Construction stage, NS-EN 17213:2020).

B1- Use

Use of the installed product in terms of any emissions to the environment (not covered by B2-B7). Module not declared.

B2- Maintenance

The maintenance scenario includes cleaning and painting. Cleaning is performed three times washing per year for doors with glass. It is calculated with 45 ml of detergent and 4.5 liters of water each year during RSL of the building.

Doors are assumed to be painted 1 time during their lifetime. It is assumed that 5 gr of lubricating oil is used every year for fittings and moving parts.

B3- Repair

No repair is assumed during the product's lifetime. Module not declared.

B4- Replacement

The door has an RSL (Reference Service Life) of 10 years. If the lifetime of the building is assumed 60 years, a five-time replacement.

B5- Refurbishment

There is no need for refurbishment during the product's lifetime. Module not declared.

B6 and B7

Module not declared.

C1- Deconstruction demolition

In the C module, the end-of-life scenario is assumed that the door is demounted during the deconstruction process and no separate energy from a machine is required for this process.

C2-Transport

The entire door is transported to a municipal waste collection and sorting station, and the average transport distance from the demolition place to the station is assumed to be 85 km.

C3- Waste processing

Based on Table 1 in NPCR 014 Part B- Windows and Doors, the door is assumed as mixed waste and sent to municipal incineration with energy recovery.

C4- Disposal

The ashes from municipal incineration, that are not separated for recycling goals, are transferred to landfilling.

D- Benefits and loads beyond the system boundaries

The combustible materials (plastic and timber) are considered as energy recovered materials. Energy recovery from incineration is assumed with the process efficiency rate of the power station above 60 %.

The metals are separated from the bottom ashes and recycled. Since there is no data on the share recycled, the Ecoinvent database is employed (B.3, NS-EN 17213:2020) Here the assumption is that recovered metals can be substituted by the primary metals used (6.4.3.3, EN 15804).

| Transport from production place to user (A4) | Capacity utilisation (incl. return) % | Distance (km) | Fuel/Energy Consumption | Unit | Value (Liter/tonne) |
|--|---------------------------------------|---------------|-------------------------|-------|---------------------|
| Ship, Ferry, Sea (km) | 50,0 % | 99 | 0,034 | l/tkm | 3,37 |
| Train, freight (kgkm) | 0,0 % | 1376 | 0,000 | 0 | 0,00 |
| Truck, 16-32 tonnes, EURO 6 (km) - Europe | 36,7 % | 568 | 0,043 | l/tkm | 24,42 |
| Truck, 16-32 tonnes, EURO 6 (km) - Europe | 36,7 % | 50 | 0,043 | l/tkm | 2,15 |
| Truck, 16-32 tonnes, EURO 6 (km) - Europe | 36,7 % | 452 | 0,043 | l/tkm | 19,44 |

| Assembly (A5) | Unit | Value | | | |
|---|--|----------------------|--------------------------------|-------------|----------------------------|
| Waste, packaging, pallet, wooden pallet, single use, average treatment (kg) | kg | 0,91 | | | |
| Waste, packaging, plastic film (LDPE), to average treatment (kg) | kg | 0,01 | | | |
| Maintenance (B2) | Unit | Value | | | |
| Lubricant (kg) | kg/DU | 0,30 | | | |
| Paint wastage, 40% water, wet mass (kg) | kg | 0,06 | | | |
| Paint, 40% water, wet mass (kg) inkl. 5% waste | kg/DU | 1,20 | | | |
| Soap water, 5% solution with household detergent (kg) | kg/DU | 2,73 | | | |
| Waste paint, 40% water, wet mass, incineration in Norway (kg) | kg | 0,06 | | | |
| Wastewater, average treatment (m3) | m3 | 0,27 | | | |
| Water, tap water (kg) | kg/DU | 270,00 | | | |
| Replacement (B4) | Unit | Value | | | |
| Replace product, including waste treatment (psc) | Units/DU | 5,00 | | | |
| Transport to waste processing (C2) | Capacity utilisation (incl. return) % | Distance (km) | Fuel/Energy Consumption | Unit | Value (Liter/tonne) |
| Truck, unspecified (km) - Europe | 48,7 % | 85 | 0,051 | l/tkm | 4,34 |
| Waste processing (C3) | Unit | Value | | | |
| Materials to recycling (kg) | kg | 6,01 | | | |
| Waste treatment per kg Cardboard and paper, incineration with fly ash extraction (kg) | kg | 0,24 | | | |
| Waste treatment per kg Paint, hazardous waste incineration (kg) | kg | 0,92 | | | |
| Waste treatment per kg Polyurethane (PU), incineration (kg) | kg | 0,11 | | | |
| Waste treatment per kg Polyvinylchloride (PVC), incineration with fly ash extraction (kg) | kg | 1,55 | | | |
| Waste treatment per kg Rubber, municipal incineration with fly ash extraction (kg) | kg | 0,10 | | | |
| Waste treatment per kg Wood, incineration with fly ash extraction (kg) | kg | 8,34 | | | |
| Waste, glass, to landfill (kg) - inkl. 85 km transport | kg | 13,42 | | | |
| Disposal (C4) | Unit | Value | | | |
| Landfilling of ashes from incineration of Cardboard and paper, process per kg ashes and residues (kg) | kg | 0,00 | | | |
| Landfilling of ashes from incineration of Paint, hazardous waste incineration, process of ashes and residues (kg) | kg | 0,03 | | | |
| Landfilling of ashes from incineration of Polyurethane (PU), process per kg ashes and residues - C4 (kg) | kg | 0,00 | | | |
| Landfilling of ashes from incineration of Polyvinylchloride (PVC), process per kg ashes and residues (kg) | kg | 0,25 | | | |
| Landfilling of ashes from incineration of Rubber, process per kg ashes and residues - C4 (kg) | kg | 0,01 | | | |
| Landfilling of ashes from incineration of Wood, process per kg ashes and residues (kg) | kg | 0,10 | | | |
| Waste, cardboard and paper, to landfill (kg) | kg | 0,01 | | | |
| Waste, glue, to landfill (kg) | kg | 0,01 | | | |
| Waste, paint, to landfill (kg) - C4 | kg | 0,01 | | | |
| Waste, polyvinylchloride, to landfill (kg) | kg | 0,08 | | | |
| Waste, scrap steel, to landfill (kg) | kg | 0,01 | | | |
| Waste, wood, untreated, to landfill (kg) | kg | 0,44 | | | |
| Benefits and loads beyond the system boundaries (D) | Unit | Value | | | |
| Substitution of electricity, in Norway (MJ) | MJ | 7,87 | | | |
| Substitution of primary glass with net scrap (kg) | kg | 5,75 | | | |
| Substitution of primary steel with net scrap (kg) | kg | 0,26 | | | |
| Substitution of thermal energy, district heating, in Norway (MJ) | MJ | 119,12 | | | |

LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

| Environmental impact | | | | | | | | | | | | |
|--|------------------------|-----------|----------|----------|----------|----------|----|----------|----------|----------|-----------|--|
| Indicator | Unit | A1-A3 | A4 | A5 | B2 | B4 | C1 | C2 | C3 | C4 | D | |
|  GWP-total | kg CO ₂ -eq | 3,20E+01 | 7,89E+00 | 1,40E+00 | 8,62E+00 | 3,22E+02 | 0 | 3,52E-01 | 2,25E+01 | 1,47E-01 | -6,86E+00 | |
|  GWP-fossil | kg CO ₂ -eq | 4,79E+01 | 7,88E+00 | 2,52E-02 | 7,22E+00 | 3,17E+02 | 0 | 3,52E-01 | 7,14E+00 | 8,44E-02 | -6,78E+00 | |
|  GWP-biogenic | kg CO ₂ -eq | -1,63E+01 | 6,26E-03 | 1,38E+00 | 7,72E-02 | 2,38E+00 | 0 | 1,51E-04 | 1,53E+01 | 6,23E-02 | -5,68E-02 | |
|  GWP-luluc | kg CO ₂ -eq | 4,30E-01 | 4,97E-03 | 6,33E-06 | 1,33E+00 | 2,18E+00 | 0 | 1,25E-04 | 6,49E-04 | 1,01E-05 | -2,55E-02 | |
|  ODP | kg CFC11-eq | 6,44E-06 | 1,62E-06 | 3,95E-09 | 1,32E-06 | 4,26E-05 | 0 | 8,02E-08 | 3,80E-07 | 6,48E-09 | -5,03E-02 | |
|  AP | mol H ⁺ -eq | 3,95E-01 | 4,55E-02 | 1,97E-04 | 6,78E-02 | 2,25E+00 | 0 | 2,01E-03 | 7,72E-03 | 2,44E-04 | -6,84E-02 | |
|  EP-FreshWater | kg P -eq | 3,31E-03 | 1,02E-04 | 2,94E-07 | 2,72E-03 | 1,72E-02 | 0 | 2,90E-06 | 1,89E-05 | 1,09E-06 | -1,81E-04 | |
|  EP-Marine | kg N -eq | 6,50E-02 | 1,31E-02 | 8,52E-05 | 1,90E-02 | 4,06E-01 | 0 | 7,17E-04 | 2,23E-03 | 1,15E-04 | -1,18E-02 | |
|  EP-Terrestrial | mol N -eq | 7,56E-01 | 1,45E-01 | 9,06E-04 | 9,67E-02 | 4,67E+00 | 0 | 7,90E-03 | 2,43E-02 | 8,45E-04 | -1,41E-01 | |
|  POCP | kg NMVOC-eq | 2,09E-01 | 4,29E-02 | 2,33E-04 | 3,71E-02 | 1,31E+00 | 0 | 2,26E-03 | 7,00E-03 | 2,49E-04 | -3,57E-02 | |
|  ADP-minerals&metals ¹ | kg Sb-eq | 2,25E-03 | 1,70E-04 | 4,00E-07 | 8,95E-05 | 1,22E-02 | 0 | 9,11E-06 | 1,62E-05 | 2,74E-07 | -5,07E-04 | |
|  ADP-fossil ¹ | MJ | 6,71E+02 | 1,14E+02 | 2,90E-01 | 1,19E+02 | 4,07E+03 | 0 | 5,40E+00 | 2,23E+01 | 5,79E-01 | -7,41E+01 | |
|  WDP ¹ | m ³ | 6,86E+03 | 1,15E+02 | 4,54E-01 | 1,14E+02 | 3,57E+04 | 0 | 5,12E+00 | 1,39E+02 | 8,49E+00 | -1,62E+02 | |

GWP-total = Global Warming Potential total; GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

Remarks to environmental impacts

| Additional environmental impact indicators | | | | | | | | | | | | |
|---|-------------------|----------|----------|----------|----------|----------|----|----------|----------|----------|-----------|--|
| Indicator | Unit | A1-A3 | A4 | A5 | B2 | B4 | C1 | C2 | C3 | C4 | D | |
|  PM | Disease incidence | 3,72E-06 | 5,19E-07 | 2,42E-09 | 5,30E-07 | 2,20E-05 | 0 | 3,21E-08 | 1,23E-07 | 2,76E-09 | -9,77E-07 | |
|  IRP ² | kgBq U235 -eq | 3,31E+00 | 5,04E-01 | 1,06E-03 | 4,38E-01 | 1,97E+01 | 0 | 2,36E-02 | 1,00E-01 | 2,99E-03 | -2,11E-01 | |
|  ETP-fw ¹ | CTUe | 9,22E+02 | 9,59E+01 | 3,30E-01 | 2,80E+02 | 6,20E+03 | 0 | 4,04E+00 | 2,16E+02 | 1,64E+00 | -1,93E+02 | |
|  HTP-c ¹ | CTUh | 3,46E-08 | 0,00E+00 | 3,60E-11 | 1,10E-08 | 2,10E-07 | 0 | 0,00E+00 | 7,31E-09 | 6,80E-11 | -3,66E-09 | |
|  HTP-nc ¹ | CTUh | 5,94E-07 | 1,14E-07 | 1,75E-09 | 1,70E-07 | 3,98E-06 | 0 | 5,35E-09 | 7,78E-08 | 2,60E-09 | -6,41E-08 | |
|  SQP ¹ | dimensionless | 1,48E+03 | 7,75E+01 | 1,67E-01 | 1,29E+02 | 7,91E+03 | 0 | 4,62E+00 | 1,74E+01 | 2,10E+00 | -9,58E+01 | |

PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Potential Soil Quality Index (dimensionless)

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator
2. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

| Resource use | | | | | | | | | | | | |
|---|----------------|----------|----------|-----------|----------|-----------|----|----------|-----------|----------|-----------|--|
| Indicator | Unit | A1-A3 | A4 | A5 | B2 | B4 | C1 | C2 | C3 | C4 | D | |
|  PERE | MJ | 1,95E+02 | 2,80E+00 | 5,98E-03 | 1,78E+01 | 1,00E+03 | 0 | 7,75E-02 | 3,18E+00 | 4,52E-02 | -6,41E+01 | |
|  PERM | MJ | 1,03E+02 | 0,00E+00 | -1,26E+01 | 0,00E+00 | 0,00E+00 | 0 | 0,00E+00 | -9,00E+01 | 0,00E+00 | 0,00E+00 | |
|  PERT | MJ | 2,97E+02 | 2,80E+00 | -1,26E+01 | 1,78E+01 | 1,00E+03 | 0 | 7,75E-02 | -8,69E+01 | 4,52E-02 | -6,41E+01 | |
|  PENRE | MJ | 6,29E+02 | 1,14E+02 | 2,90E-01 | 1,14E+02 | 3,86E+03 | 0 | 5,40E+00 | 2,23E+01 | 5,79E-01 | -7,41E+01 | |
|  PENRM | MJ | 4,39E+01 | 0,00E+00 | -4,25E-01 | 7,30E+00 | -3,65E+01 | 0 | 0,00E+00 | -5,08E+01 | 0,00E+00 | 0,00E+00 | |
|  PENRT | MJ | 6,73E+02 | 1,14E+02 | -1,34E-01 | 1,21E+02 | 3,82E+03 | 0 | 5,40E+00 | -2,85E+01 | 5,79E-01 | -7,41E+01 | |
|  SM | kg | 1,73E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 8,66E-01 | 0 | 0,00E+00 | 0,00E+00 | 4,10E-06 | 0,00E+00 | |
|  RSF | MJ | 2,39E+00 | 6,72E-02 | 1,74E-04 | 3,54E-02 | 1,26E+01 | 0 | 2,76E-03 | 6,52E-02 | 1,09E-03 | -4,90E-04 | |
|  NRSF | MJ | 2,69E-01 | 3,25E-01 | 1,97E-03 | 1,25E-02 | 3,34E+00 | 0 | 9,69E-03 | 1,00E-02 | 5,28E-02 | -3,32E+00 | |
|  FW | m ³ | 5,23E-01 | 1,98E-02 | 2,11E-04 | 1,56E-01 | 3,25E+00 | 0 | 6,11E-04 | 1,06E-01 | 5,78E-04 | -1,06E-01 | |

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary materials; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Net use of fresh water

*Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

| End of life - Waste | | | | | | | | | | | | |
|---|------|-------|----------|----------|----------|----------|----------|----|----------|----------|----------|-----------|
| Indicator | Unit | A1-A3 | A4 | A5 | B2 | B4 | C1 | C2 | C3 | C4 | D | |
|  | HWD | kg | 2,29E-01 | 1,14E-02 | 0,00E+00 | 6,66E-02 | 1,71E+00 | 0 | 2,91E-04 | 0,00E+00 | 1,02E-01 | -2,33E-02 |
|  | NHWD | kg | 7,43E+00 | 4,44E+00 | 9,18E-01 | 4,93E+00 | 1,37E+02 | 0 | 3,35E-01 | 1,34E+01 | 8,81E-01 | -7,35E-01 |
|  | RWD | kg | 2,95E-03 | 7,46E-04 | 0,00E+00 | 5,85E-04 | 1,87E-02 | 0 | 3,67E-05 | 0,00E+00 | 2,00E-06 | -2,54E-04 |

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed

*Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3} = 0,009$

*INA Indicator Not Assessed

| End of life - Output flow | | | | | | | | | | | | |
|---|------|-------|----------|----------|----------|----------|----------|----|----------|----------|----------|----------|
| Indicator | Unit | A1-A3 | A4 | A5 | B2 | B4 | C1 | C2 | C3 | C4 | D | |
|  | CRU | kg | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
|  | MFR | kg | 8,84E-01 | 0,00E+00 | 5,13E-03 | 0,00E+00 | 3,45E+01 | 0 | 0,00E+00 | 6,01E+00 | 4,05E-05 | 0,00E+00 |
|  | MER | kg | 2,21E-01 | 0,00E+00 | 9,01E-01 | 0,00E+00 | 5,73E+01 | 0 | 0,00E+00 | 1,03E+01 | 9,30E-07 | 0,00E+00 |
|  | EEE | MJ | 1,83E-01 | 0,00E+00 | 6,26E-01 | 3,54E-02 | 4,34E+01 | 0 | 0,00E+00 | 7,87E+00 | 6,41E-05 | 0,00E+00 |
|  | EET | MJ | 2,77E+00 | 0,00E+00 | 9,48E+00 | 2,46E-01 | 6,57E+02 | 0 | 0,00E+00 | 1,19E+02 | 9,69E-04 | 0,00E+00 |

CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported energy electrical; EET = Exported energy thermal

*Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3} = 0,009$

*INA Indicator Not Assessed

| Biogenic Carbon Content | | |
|---|------|---------------------|
| Indicator | Unit | At the factory gate |
| Biogenic carbon content in product | kg C | 4,18E+00 |
| Biogenic carbon content in accompanying packaging | kg C | 3,75E-01 |

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO₂

Additional requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

| Electricity mix | Source | Amount | Unit |
|----------------------------|---------------|--------|---------------------------|
| Electricity, Romania (kWh) | ecoinvent 3.6 | 465,15 | g CO ₂ -eq/kWh |
| Electricity, Norway (kWh) | ecoinvent 3.6 | 24,33 | g CO ₂ -eq/kWh |

Dangerous substances

The product contains no substances given by the REACH Candidate list.

Indoor environment

Additional Environmental Information

Additional environmental impact indicators required in NPCR Part A for construction products

| Indicator | Unit | A1-A3 | A4 | A5 | B2 | B4 | C1 | C2 | C3 | C4 | D |
|-----------|------------------------|----------|----------|----------|----------|----------|----|----------|----------|----------|-----------|
| GWPIOBC | kg CO ₂ -eq | 4,87E+01 | 7,89E+00 | 2,52E-02 | 8,61E+00 | 3,23E+02 | 0 | 3,52E-01 | 7,54E+00 | 1,50E-01 | -6,98E+00 |

GWP-IOBC: Global warming potential calculated according to the principle of instantaneous oxidation. In order to increase the transparency of biogenic carbon contribution to climate impact, the indicator GWP-IOBC is required as it declares climate impacts calculated according to the principle of instantaneous oxidation. GWP-IOBC is also referred to as GWP-GHG in context to Swedish public procurement legislation.

Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.
 ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.
 EN 15804:2012+A2:2019 Environmental product declaration - Core rules for the product category of construction products.
 ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products.
 ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.
 Iversen et al., (2021) eEPD v2021.09 Background information for EPD generator tool system verification, LCA.no Report number: 07.21
 Iversen et al., (2022) EPD generator for EPD generator for NPCR 014
 Part B for Windows and doors, Background information for EPD generator application and LCA data, LCA.no report number: 17.22
 NPCR Part A: Construction products and services. Ver. 2.0. April 2021, EPD-Norge.
 NPCR 014 Part B for Windows and doors, Ver. 4.0, 20.09.2021, EPD Norway.

| | | |
|---|--|--|
|  epd-norway <small>Global Program Operator</small> | Program operator and publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo, Norway | Phone: +47 977 22 020 e-mail: post@epd-norge.no web: www.epd-norge.no |
|  HARMONIE | Owner of the declaration: Harmonie Norge AS Borgeskogen 36, 3160 Stokke | Phone: +47 94 98 04 80 e-mail: paul@harmonie.no web: https://harmonie.no/ |
|  | Author of the Life Cycle Assessment LCA.no AS Dokka 6A, 1671 | Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no |
|  | Developer of EPD generator LCA.no AS Dokka 6B,1671 Kråkerøy | Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no |
|  | ECO Platform ECO Portal | web: www.eco-platform.org web: ECO Portal |