

DATA SHEET

NO MERCURY ADDED

Description	Mercury & Cadmium Free Alkaline Manganese Battery, 9V
Chemical System	Alkaline Manganese
Nominal Voltage	9.0 Volts
Nominal Dimensions	Refer to drawing
Terminals	Protruded positive (+) and flat negative (-) contacts
Jacket	Foil jacket
Applications	All electronic devices, e.g. transistor radios, cassette recorders, toys, alarm clocks, lighting & torches, portable fans
Ambient Temperature Range	Operation: -18°C ~ 50°C Recommended: 10°C ~ 25°C Storage: Not exceed 30°C
Shelf Life	5 years
Approx. Weight	47g

Cross References:

GP	JIS	IEC	Eveready	Duracell
1604A	6LP3146/ 6LR61	6LP3146/ 6LR61	522	MN1604


Discharge curve:

Remarks

- 1) Store period before test shall be under 20±2°C, RH 55±20% within 30 days of manufacture.
- 2) Batteries shall not leak during the service life test before the end voltage reached.



Model No.: **GP1604A**

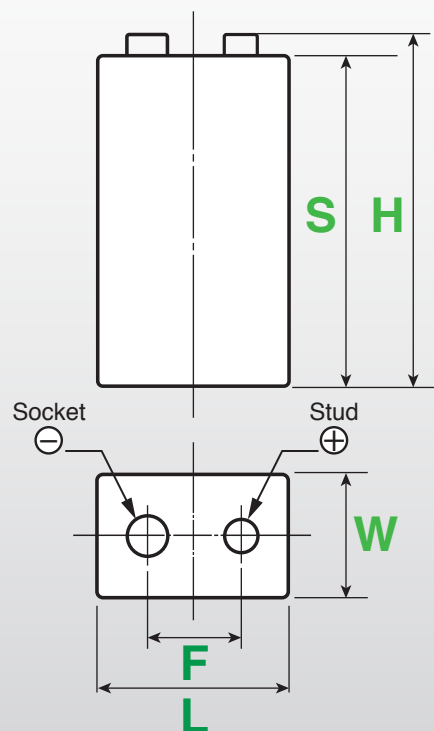

/	min	max
H	46.5	48.5
S	43.7	44.7
F	12.45	12.95
L	25.3	26.1
W	16.3	17.1

Dimension : mm

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.