

Environmental product declaration

in accordance with ISO 14025 and EN 15804+A2

Kryssfiner ECU Film



FRITZOE
ENGROS

FRITZOE
ENGROS
Tre inn i fremtiden

The Norwegian EPD Foundation

Owner of the declaration:

Fritzøe Engros AS

Product:

Kryssfiner ECU Film

Declared unit:

1 m³

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core PCR

NPCR 010:2022 Part B for building boards

Program operator:

The Norwegian EPD Foundation

Declaration number:

NEPD-9103-8423

Registration number:

NEPD-9103-8423

Issue date: 14.02.2025

Valid to: 14.02.2030

EPD software:

LCAno EPD generator ID: 552911

General information

Product

Kryssfiner ECU Film

Program operator:

The Norwegian EPD Foundation
Post Box 5250 Majorstuen, 0303 Oslo, Norway
Phone: +47 977 22 020
web: www.epd-norge.no

Declaration number:

NEPD-9103-8423

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core PCR
NPCR 010:2022 Part B for building boards

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

Declared unit:

1 m3 Kryssfiner ECU Film

Declared unit with option:

A1-A3,A4,A5,C1,C2,C3,C4,D

Functional unit:

General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Verification of each EPD is made according to EPD-Norway's guidelines for verification and approval requiring that tools are i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPD-Norway, and iii) the process is reviewed annually by an independent third party verifier. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools

Verification of EPD tool:

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPDNorway's procedures and guidelines for verification and approval of EPD tools.

Third party verifier:

Elisabet Amat, GREENIZE projects

(no signature required)

Owner of the declaration:

Fritzøe Engros AS
Contact person: Jarle Anholt
Phone: +47 331 364 00
e-mail: engros@fritzoengros.no

Manufacturer:

Fritzøe Engros AS

Place of production:

Fritzøe Engros AS
Øya 40
3262 Larvik, Norway

Management system:

Miljøfyrtårn, FSC og PEFC

Organisation no:

979 778 341

Issue date:

14.02.2025

Valid to:

14.02.2030

Year of study:

2023

Comparability:

EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

Development and verification of EPD:

The declaration is created using EPD tool lca.tools ver EPD2022.03, developed by LCA.no. The EPD tool is integrated in the company's management system, and has been approved by EPD Norway.

Developer of EPD: Terje Olsen

Reviewer of company-specific input data and EPD: Jarle Anholt

Approved:

Håkon Hauan
Managing Director of EPD-Norway

Product

Product description:

Plywood ECU is a film-coated plywood with film/film or wire/film with a good quality for exterior use and with a sharp edge. The panels are coated with smooth phenol film on both sides for concrete form works.

Product specification

Materials	kg	%
Adhesive	129,00	21,01
Wood - Veneer	485,00	78,99
Total	614,00	100,00

Packaging	kg	%
Packaging - Metal	1,00	3,57
Packaging - Paper	2,00	7,14
Packaging - Wood	25,00	89,29
Total incl. packaging	642,00	100,00

Technical data:

ECU Film plywood are marked with CE-marking containing unambiguous code of Declaration of Performance, i.e. nr. 3038-CPR15082023 and nr. 3037-CPR-15082023.

Thickness (mm)	Length (mm)	Width (mm)	Volume (m3)
9	2440	1220	0,0267912
12	2440	1220	0,0357216
15	2440	1220	0,044652
18	2440	1220	0,0535824
21	2440	1220	0,0625128
9	3000	1500	0,0405
12	3000	1500	0,054
15	3000	1500	0,0675
18	3000	1500	0,081
21	3000	1500	0,0945
15	2500	200	0,0075
15	2500	250	0,009375
15	2500	300	0,01125
15	2500	400	0,015
15	2500	500	0,01875
21	2500	500	0,2625
21	1500	500	0,1575

Market:

Nordic countrys.

Reference service life, product

30

Reference service life, building or construction works

Not declared

LCA: Calculation rules

Declared unit:

1 m3 Kryssfiner ECU Film

Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included when specific information are missing. These cut-off criteria do not apply for hazardous materials and substances.

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Incoming energy and water and waste production in-house is allocated equally among all products through mass allocation. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

Data quality:

Specific data for the product composition are provided by the manufacturer. The data represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on EPDs according to EN 15804 and different LCA databases. The data quality of the raw materials in A1 is presented in the table below.

Materials	Source	Data quality	Year
Packaging - Paper	ecoinvent 3.6	Database	2019
Adhesive	ecoinvent 3.9.1	Database	2021
Wood - Veneer	Modified ecoinvent 3.6	Database	2019
Packaging - Wood	ecoinvent 3.6	Database	2019
Packaging - Metal	ecoinvent 3.6	Database	2019

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Product stage			Construction installation stage		Use stage								End of life stage				Beyond the system boundaries
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use		De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery- Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7		C1	C2	C3	C4	D
X	X	X	X	X	MND	MND	MND	MND	MND	MND	MND		X	X	X	X	X


System boundary:

Figure 1. System diagram.

Module A1 includes the production of raw materials and energy used in the manufacturing of the plywood products. Popular logs are sourced from China and Eucalyptus is sourced from Uruguay according to mill locations.

Module A2 comprises of transportation processes up to the plywood mill gates. Most of the materials are shipped to the mills by road and few materials are also shipped by sea.

Module A3 includes the direct emissions of the manufacturing processes at the plywood mills, production of auxiliary and packaging materials, treatment of solid wastes and pre-treatment of wastewater. Plywood manufacturing process is depicted in Figure 1.

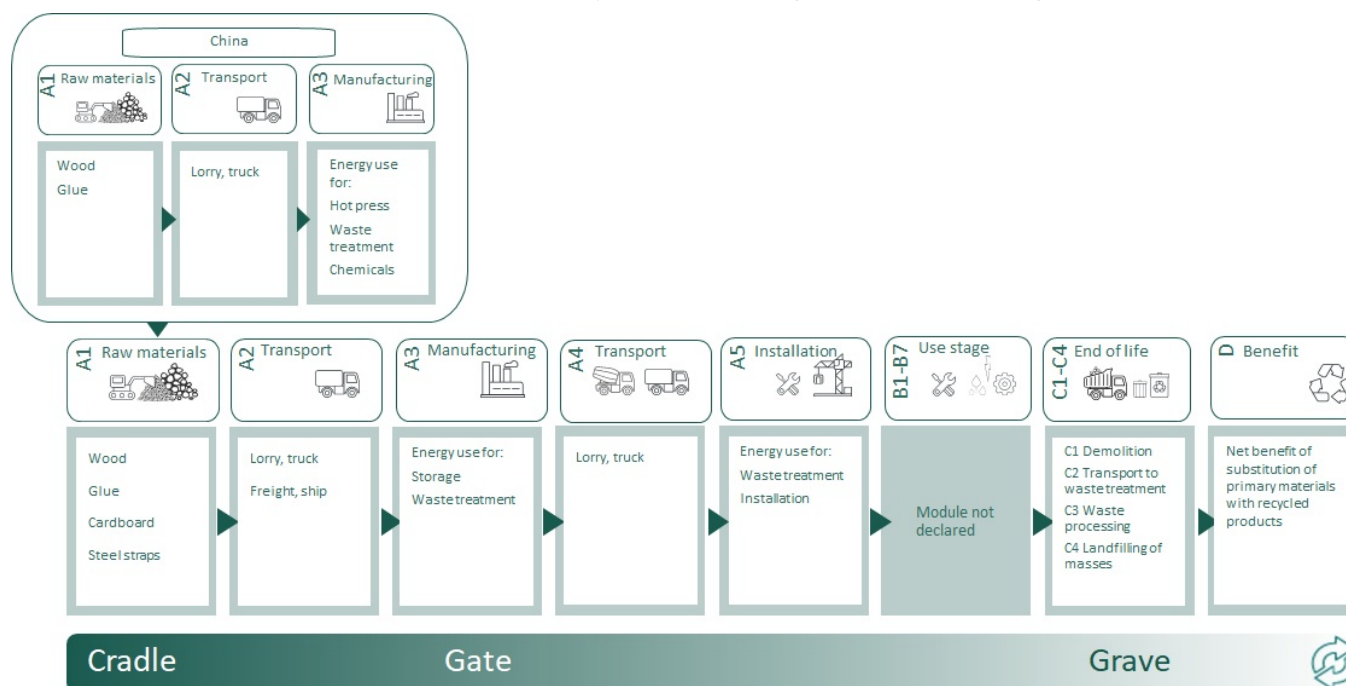

Additional technical information:

LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.














A5: manual instalment, so no energy inputs have been included.

C2: generic transport for Norwegian market between building site and waste treatment.

Transport from production place to user (A4)	Capacity utilisation (incl. return) %	Distance (km)	Fuel/Energy Consumption	Unit	Value (Liter/tonne)
Truck, 16-32 tonnes, EURO 6 (km) - Europe	36,7 %	300	0,043	l/tkm	12,90
Assembly (A5)					
Unit	Value				
Product waste during installation (DU)	Units/DU	0,050			
Waste, packaging, pallet, to average treatment (kg)	kg	25,000000000000000000			
Waste, packaging, paper, to average treatment (kg)	kg	2,000000000000000000			
Waste, metal, to average treatment (kg)	kg	1,000000000000000000			
De-construction demolition (C1)					
Unit	Value				
Demolition of building per kg of building board (kg)	MJ/DU	614,000000000			
Transport to waste processing (C2)	Capacity utilisation (incl. return) %	Distance (km)	Fuel/Energy Consumption	Unit	Value (Liter/tonne)
Truck, 16-32 tonnes, EURO 6 (km) - Europe	36,7 %	85	0,043	l/tkm	3,66
Waste processing (C3)					
Unit	Value				
Waste treatment per kg Wood, incineration with fly ash extraction (kg)	kg	485,000000000000000000			
Waste treatment per kg Hazardous waste, incineration (kg)	kg	129,000000000000000000			
Disposal (C4)					
Unit	Value				
Landfilling of ashes from incineration of Wood, process per kg ashes and residues (kg)	kg	5,57			
Landfilling of ashes from incineration of Hazardous waste, from incineration (kg)	kg	24,38			
Benefits and loads beyond the system boundaries (D)					
Unit	Value				
Substitution of thermal energy, district heating (MJ)	MJ	5367,86			
Substitution of electricity (MJ)	MJ	354,80			

LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

Environmental impact										
Indicator		Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
	GWP-total	kg CO ₂ -eq	-1,69E+01	3,15E+01	9,05E+01	2,02E+00	8,92E+00	1,10E+03	1,09E+01	-3,23E+01
	GWP-fossil	kg CO ₂ -eq	8,19E+02	3,15E+01	5,05E+01	2,02E+00	8,91E+00	2,92E+02	1,09E+01	-3,11E+01
	GWP-biogenic	kg CO ₂ -eq	-8,37E+02	1,30E-02	4,00E+01	3,78E-04	3,69E-03	8,09E+02	4,36E-03	-6,43E-02
	GWP-luluc	kg CO ₂ -eq	1,50E+00	1,12E-02	2,15E-02	1,59E-04	3,17E-03	7,31E-02	1,06E-03	-1,07E+00
	ODP	kg CFC11 -eq	7,71E-05	7,13E-06	-1,13E-01	4,36E-07	2,02E-06	3,33E-05	5,44E-07	-2,27E+00
	AP	mol H+ -eq	8,67E+00	9,04E-02	2,52E-01	2,11E-02	2,56E-02	4,96E-01	2,20E-02	-2,56E-01
	EP-FreshWater	kg P -eq	1,14E-01	2,51E-04	5,92E-03	7,35E-06	7,12E-05	6,96E-03	1,06E-04	-2,77E-03
	EP-Marine	kg N -eq	2,09E+00	1,79E-02	5,95E-02	9,32E-03	5,07E-03	1,23E-01	5,75E-03	-8,38E-02
	EP-Terrestrial	mol N -eq	2,40E+01	2,00E-01	7,04E-01	1,02E-01	5,67E-02	1,37E+00	6,73E-02	-9,06E-01
	POCP	kg NMVOC -eq	6,19E+00	7,67E-02	1,81E-01	2,81E-02	2,17E-02	3,69E-01	1,88E-02	-2,50E-01
	ADP-minerals&metals ¹	kg Sb-eq	1,37E-02	8,69E-04	7,31E-04	3,10E-06	2,46E-04	1,02E-03	1,96E-05	-3,10E-04
	ADP-fossil ¹	MJ	1,14E+04	4,76E+02	5,62E+02	2,78E+01	1,35E+02	1,25E+03	5,20E+01	-4,45E+02
	WDP ¹	m ³	3,89E+03	4,60E+02	2,12E+02	5,90E+00	1,30E+02	4,56E+03	1,30E+03	-5,54E+03







GWP-total = Global Warming Potential total; GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption

"Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009"

*INA Indicator Not Assessed

1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

Remarks to environmental impacts









Additional environmental impact indicators										
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D	
 PM	Disease incidence	1,99E-04	1,93E-06	9,73E-06	5,59E-07	5,46E-07	7,24E-06	1,54E-07	-1,55E-05	
 IRP ²	kgBq U235 -eq	3,09E+01	2,08E+00	1,48E+00	1,19E-01	5,89E-01	5,55E+00	2,88E-01	-2,84E+00	
 ETP-fw ¹	CTUe	2,54E+04	3,53E+02	1,43E+03	1,52E+01	9,99E+01	5,91E+03	1,49E+02	-2,42E+03	
 HTP-c ¹	CTUh	1,08E-06	0,00E+00	6,79E-08	6,14E-10	0,00E+00	2,92E-07	7,92E-09	-4,43E-08	
 HTP-nc ¹	CTUh	1,01E-05	3,85E-07	5,96E-07	1,41E-08	1,09E-07	2,51E-06	2,91E-07	-2,32E-06	
 SQP ¹	dimensionless	1,65E+05	3,33E+02	8,16E+03	3,53E+00	9,43E+01	4,80E+02	1,48E+02	-2,98E+03	

PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Potential Soil Quality Index (dimensionless)

"Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3}$ = 0,009"

*INA Indicator Not Assessed




1. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator
2. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

Resource use										
Indicator		Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
	PERE	MJ	2,19E+04	6,81E+00	9,65E+02	1,50E-01	1,93E+00	2,18E+02	6,23E+00	-2,75E+03
	PERM	MJ	7,16E+03	0,00E+00	-3,56E+02	0,00E+00	0,00E+00	-6,79E+03	0,00E+00	0,00E+00
	PERT	MJ	2,90E+04	6,81E+00	6,09E+02	1,50E-01	1,93E+00	-6,57E+03	6,23E+00	-2,75E+03
	PENRE	MJ	1,14E+04	4,76E+02	5,62E+02	2,78E+01	1,35E+02	1,25E+03	5,20E+01	-4,45E+02
	PENRM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	PENRT	MJ	1,14E+04	4,76E+02	5,62E+02	2,78E+01	1,35E+02	1,25E+03	5,20E+01	-4,45E+02
	SM	kg	6,54E-01	0,00E+00	3,27E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	RSF	MJ	4,01E+00	2,44E-01	4,26E-01	3,70E-03	6,90E-02	4,81E+00	1,14E-01	-4,81E-01
	NRSF	MJ	4,65E+00	8,71E-01	-7,86E+00	5,44E-02	2,47E-01	0,00E+00	2,81E+00	-1,63E+02
	FW	m ³	1,47E+01	5,09E-02	6,30E-01	1,43E-03	1,44E-02	1,21E+00	9,05E-02	-3,31E+00

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary materials; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Net use of fresh water

*Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3} = 0,009$






*INA Indicator Not Assessed

End of life - Waste										
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D	
 HWD	kg	7,02E+00	2,45E-02	5,49E-01	8,18E-04	6,95E-03	0,00E+00	4,05E+00	-2,09E-02	
 NHWD	kg	9,63E+01	2,31E+01	4,10E+01	3,29E-02	6,55E+00	1,29E+02	2,59E+01	-1,05E+01	
 RWD	kg	3,00E-02	3,24E-03	9,86E-04	1,93E-04	9,18E-04	0,00E+00	1,17E-05	-2,33E-03	

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed

"Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3}$ = 0,009"

*INA Indicator Not Assessed

End of life - Output flow										
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D	
 CRU	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	
 MFR	kg	3,89E+00	0,00E+00	3,04E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	
 MER	kg	1,09E+01	0,00E+00	5,62E+01	0,00E+00	0,00E+00	6,14E+02	0,00E+00	0,00E+00	
 EEE	MJ	7,13E+00	0,00E+00	3,46E+01	0,00E+00	0,00E+00	3,37E+02	0,00E+00	0,00E+00	
 EET	MJ	1,08E+02	0,00E+00	5,23E+02	0,00E+00	0,00E+00	5,10E+03	0,00E+00	0,00E+00	

CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported energy electrical; EET = Exported energy thermal

"Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3}$ = 0,009"

*INA Indicator Not Assessed

Biogenic Carbon Content		
Indicator	Unit	At the factory gate
Biogenic carbon content in product	kg C	2,20E+02
Biogenic carbon content in accompanying packaging	kg C	1,13E+01

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO₂

Additional requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Electricity mix	Source	Amount	Unit
Electricity, Norway (kWh)	ecoinvent 3.6	24,33	g CO ₂ -eq/kWh

Dangerous substances

The product contains no substances given by the REACH Candidate list.

Indoor environment

The product has no influence on the indoor climate. No tests have been conducted.






Additional Environmental Information

Additional environmental impact indicators required in NPCR Part A for construction products									
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWPIOBC	kg CO ₂ -eq	8,30E+02	3,15E+01	5,11E+01	2,00E+00	8,92E+00	2,93E+02	1,09E+01	-3,18E+01

GWPI-IOBC: Global warming potential calculated according to the principle of instantaneous oxidation. In order to increase the transparency of biogenic carbon contribution to climate impact, the indicator GWP-IOBC is required as it declares climate impacts calculated according to the principle of instantaneous oxidation. GWP-IOBC is also referred to as GWP-GHG in context to Swedish public procurement legislation.

Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.
 ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.
 EN 15804:2012+A2:2019 Environmental product declaration - Core rules for the product category of construction products.
 ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products.
 ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.
 Iversen et al., (2021) eEPD v2021.09 Background information for EPD generator tool system verification, LCA.no Report number: 07.21
 Vold, M. et al. (2022) EPD generator for Building boards
 Background information for EPD generator application and LCA data, LCA.no report number 05.22
 NPCR Part A: Construction products and services. Ver. 2.0. April 2021, EPD-Norge.
 NPCR 010 Part B for Building Boards. Ver. 4.0, March 2022, EPD-Norge.

 epd-norge <small>Global program operator</small>	Program operator and publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo, Norway	Phone: +47 977 22 020 e-mail: post@epd-norge.no web: www.epd-norge.no
 FRITZOE ENGROS <small>Tre inn i fremtiden</small>	Owner of the declaration: Fritzøe Engros AS Øya 40, 3262 Larvik, Norway	Phone: +47 331 364 00 e-mail: engros@fritzoengros.no web: https://www.fritzoengros.no/
 LCA <small>.no</small>	Author of the Life Cycle Assessment LCA.no AS Dokka 6A, 1671 Kråkerøy, Norway	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no
 LCA <small>.no</small>	Developer of EPD generator LCA.no AS Dokka 6A, 1671 Kråkerøy, Norway	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no
 ECO PLATFORM EPD VERIFIED	ECO Platform ECO Portal	web: www.eco-platform.org web: ECO Portal