

SPIT C6 / C6 FH



C6-20 ; C6-25 ; C6-30 ; C6-35

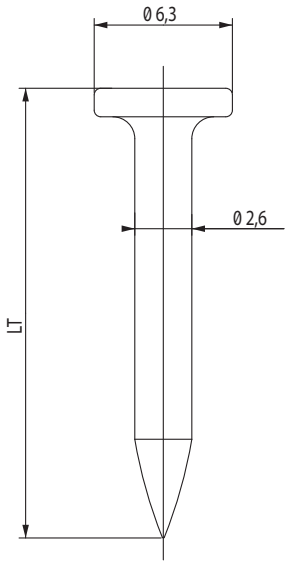

C6FH-40

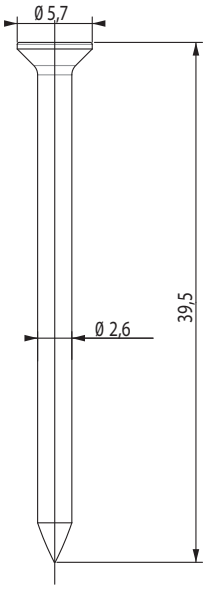

DESCRIPTION

- Using with wiring accessories, to fix drywall track.

PROPERTIES MATERIAL

Shank in carbon steel

- Total length Lt: 20, 25, 30, 35 or 40 mm
- Black collated strip
- Electrogalvanised, min zinc coating 5 µm
- Hardness (C6-20): 53 to 56 HRc
- Hardness (C6-25/30/35/40): 50 to 55 HRc

TOOLS

P800E - P800P - P800P+

AGREEMENT

CSTB Technical approval 3/06 - 460

ACCESSORIES


Magnetic nose pieces for:

- Fixing Metal latch



Eurocode 014641

- Metal P-CLIP




Eurocode 014642

- Other accessories
  - Wiring accessories for electrician & Plumber
  - FP FIREFIX™ for fire resistant cabling
  - Threaded rod hanger: TRH CLIP MCC-0


PIN LENGTH SELECTION

C6 range	Length (LT)	Black strip 500 pcs/box	Flush head pin range * 500 pcs/box
C6-20	20	057540	-
C6-25	25	057541	-
C6-30	30	057542	-
C6-35	35	057543	-
C6-40	40	-	057544

*: leaves no plastic residue after fixing

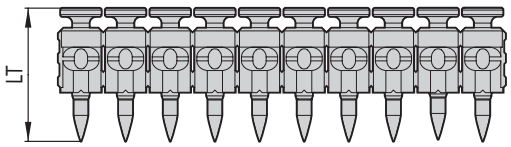

RECOMMENDED LOAD

C6 range		Characteristic resistance		Recommended load	
		N_{Rk} (kN)	V_{Rk} (kN)	N_{Rec} (kN)	V_{Rec} (kN)
 C20/25 to C30/37	H_{nom} (1) = 15 mm	0.87	0.75	0.30	0.25
	H_{nom} (1) = 18 mm	1.19		0.40	
	H_{nom} (1) = 20 mm	1.41		0.47	

(1) Embedment depth H_{nom} = 15-20 mm is recommended

L = H_{nom} + tfix (see p. 13)