

ADEFIX® PLUS Glue 290 ml



Technical properties:

Basic material	Hybrid Polymers
Consistency	Paste
Polymerization	With air humidity
Skin formation (*) (at 20°C/65% R.H.)	Approx. 5 min.
Correctable up to (*)	5 min
Hardness (DIN 53505)	65 ± 5 Shore A
Density (DIN 53479)	1.52 g/ml
Temperature resistance (after hardening)	-40°C up to +90°C
Maximum deformation	± 20 %

(*) the indicated values can be modified by environmental conditions such as temperature, humidity, substrate nature,...

Product:

ADEFIX® PLUS is a white neutral and elastic adhesive, based on hybrid polymers.

Characteristics:

- Easy use
- Good adherence onto the polystyrene and the polyurethane
- Very rapid hardening
- Permanent elasticity after polymerization
- Not frost-resistant



NMC sa reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC sa information service. Any partial reproduction or reprint shall require our explicit approval.


NMC sa
Gert-Noël-Straße - B-4731 Eynatten
Tel.: +32 87 85 85 00
Fax: +32 87 85 85 11
E-Mail: info@nmc.eu

www.nmc.eu



ADEFIX® PLUS

Glue 290 ml

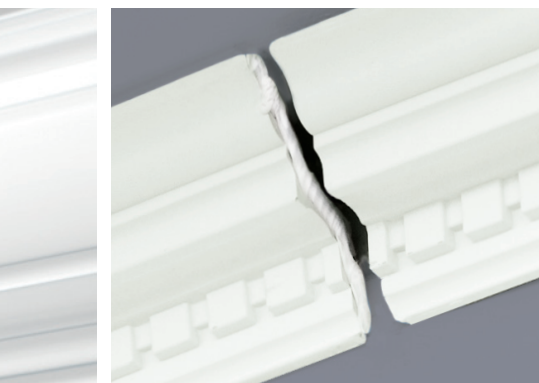

Application:

For the preparation of joints for larger WALLSTYL® and ARSTYL® products from 10 cm height/projection.

Packaging:

- Colour: white
- Content: cartridge of 290 ml (quantity for approx. 35 joints.)

Shelf life:

Can be stored for 12 months in its sealed package in a cool, dry place at +5°C to +25°C.

Method of use:

- Application: the cut edges and joints of the covings must be clean, dry and free of dust. Apply the adhesive in such a way that preferably, after the parts are pressed together, it does not protrude and an approx. 2-3 mm wide joint is formed. Smooth the finished joint with ADEFIX® adhesive filler.
- Application temperature: +5°C to +35°C (ideal: +15°C to +25°C)
- Cleaning products: white spirit or turpentine

Safety measures:

Follow the usual Occupational Health & Safety procedures.