


The ring nut for all fixings with threaded studs

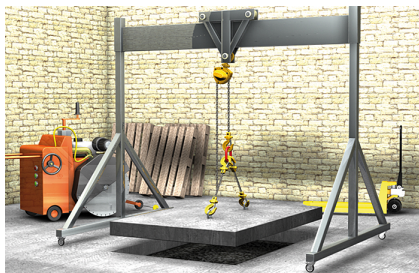

BUILDING MATERIALS

In line with the anchor used:

- Concrete, cracked and non-cracked
- Solid and hollow building materials

ADVANTAGES


- The metric internal thread gives the ring nut RI flexibility and means it can be used with a range of steel anchors or threaded rods; e.g. FH II, FHB II-A, RG M, FZA, FAZ II, FIS A.

APPLICATIONS

- Ropes
- Chains
- Climbing scaffolds
- Lighting
- Clothes lines
- Hanging baskets

FUNCTIONING

- The ring nut is to be used with an anchor with threaded studs. Detailed information about its functioning can be found in the "High Performance Steel Anchors" and "Chemical Fixings" chapters. The following anchors, for example, can be used: FHB II, RG M, FZA, FAZ II, FIS A.
- Not suitable for swings, hammocks etc.

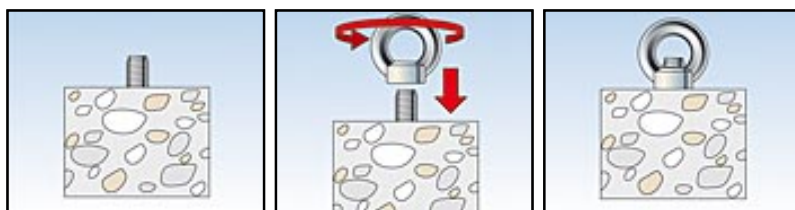

TECHNICAL DATA



Ring nut RI

Article name	Art.-No.	Match	Eye-Ø [mm]	Total height [mm]
RI M 8	080840	M 8	20	36

Article name	Art.-No.	Match	Eye-Ø [mm]	Total height [mm]
RI M 10	080842	M 10	25	45
RI M 12	080844	M 12	30	53