

Staple type: KL 500

18 GAUGE STAPLES MEDIUM CROWN

Wire Ø: 1.15mm



### Suitable for the following tools\*:

haubold PN 530 L-1 / Automatik LM  
PN 540 (L-1)  
PN 530 / 540 V  
PN 540 A

*\*please check staple length compatibility with each tool before use*

Staple lengths available: 30mm – 40mm


Staples per strip: 104

For fixing of non load-bearing gypsum plasterboard systems onto timber



### CORROSION PROTECTION

Finish	Usage Environment	Label Colour on Packaging
Zinc Galv 3µm	Service Class 1 INDOOR	Blue

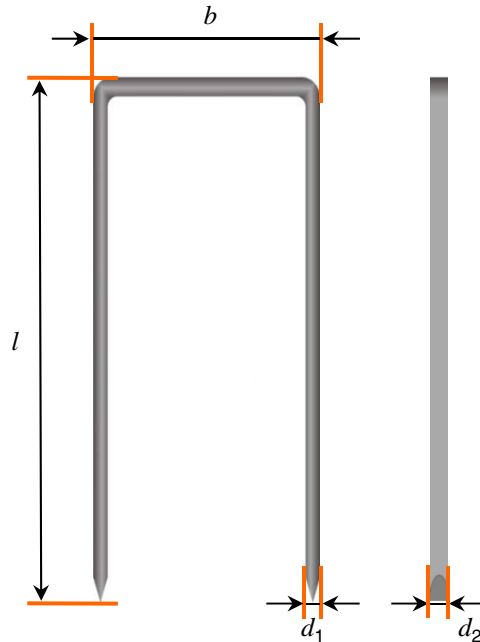

EN 14566:2008  
+A1:2009

DIN 18182-B



Chisel Point  
"C"

### STAPLE PROPERTIES / DIMENSIONS

Tensile strength of wire:	min 900 N/mm <sup>2</sup>
Nominal diameter ( $d$ ):	1.15mm
Flattened wire dimension:	( $d_1$ ): 1.00mm ( $d_2$ ): 1.23mm
Outside crown width ( $b$ ):	11.00mm
Strip length:	approx 128.00mm
Standard point:	"C"
Coated leg length:	Full

### RECOMMENDED EDGE DISTANCES

ITW recommended minimum edge distances:

Tapered Edge Plasterboard	= 10mm
Cut Edge Plasterboard	= 15mm

For more comprehensive information please contact your gypsum board manufacturer.

### STAPLE LENGTHS AVAILABLE

Finish	Lengths Available
Zinc Galv 3µm	30mm, 35mm, 40mm