
Technical data sheet

CLNG - KLEDNINGSPIKER, VARMGALVANISERT





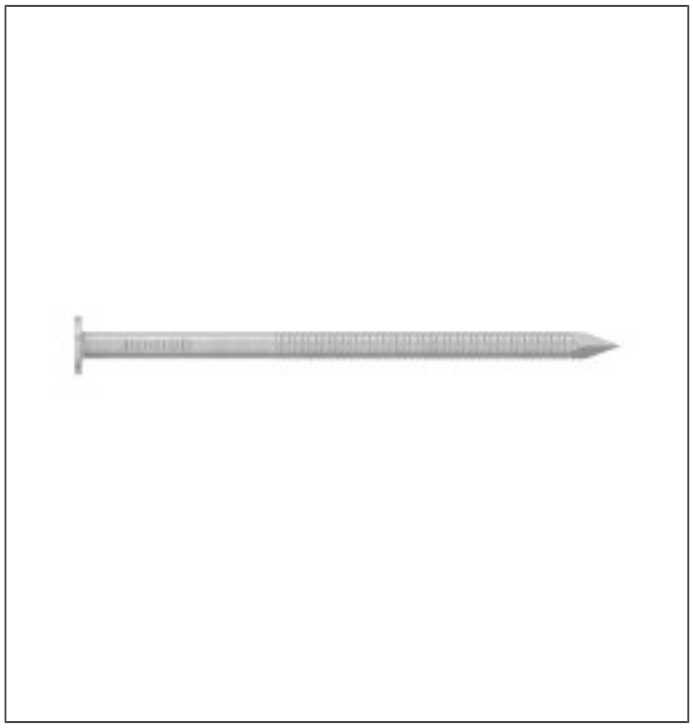

For deg som håndspikrer kledning. Punkterer ikke vindtettingen. Rillet spiker gir best hold. Dimensjoner tilpasset norsk trevirke.

CE

NO-DoP-h17/0018

EGENSKAPER



Fordeler:

- Flatt hode
- 60 graders diamant spids
- Rillet


ANVENDELSE

Bruksområde:

- For vanlig kledning som skal males eller beises
- 48 mm er tilpasset underligger
- 65 mm er tilpasset overligger og liggende kledning

TEKNISK DATA

Product dimensions



Art. nr.	Item code	NOBB nr.	Fastener dimensions [mm]					
			d	l	d_h	l_g	t_{fix}	bit
CLNG2.8x65	75649	55841565	2.8	63.5	6.9	50	41.1	-
CLNG2.8x48	75648	55841554	2.8	47	6.9	24	24.6	-

Product characteristic properties

Art. nr.	Product characteristic properties					
	Characteristic Yield Moment – $M_{y,k}$ [$M_{y.k}$] [Nm]	Characteristic withdrawal parameter - $f_{ax,k,90°}$ [$f_{ax.k.90°}$] [N/mm²]	Characteristic head pull-through parameter - $f_{head,k}$ [$f_{head.k}$] [N/mm²]	Characteristic tensile capacity - $f_{tens,k}$ [$f_{tens.k}$] [kN]	Characteristic torsional strength - $f_{tor,k}$ [$f_{tor.k}$] [Nm]	Torsonial ratio
CLNG2.8x65	3.2	8.9	29.4	3.4	-	-
CLNG2.8x48	3.2	8.9	29.4	3.4	-	-