



Stratos 9095



Specification according to EN 1307

Type of manufacture	Tufted 1/10" Loop pile	ISO 2424
Pile fibre composition	Solution dyed BCF PA6 and ECONYL® (ECONYL® is made from 100% regenerated content*)	ISO 2424
Dimensions	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)	EN 994
Primary backing	Polyester fleece	ISO 2424
Secondary backing	DESSO ProBase® or DESSO EcoBase®** Polyver®	ISO 2424
Total thickness	5.0 mm 0.2 inch	ISO 1765
Effective pile thickness	2.7 mm 0.11 inch	ISO 1766
Total mass	4050 g/m² 119.5 oz/yd²	ISO 8543
Total pile mass	550 g/m² 16.2 oz/yd²	ISO 2424
Effective pile mass	360 g/m² 10.6 oz/yd²	ISO 8543
Pile density	0.133 g/cm³ 0.0048 lb/in³	ISO 8543
Number of tufts	1580/dm² 132104/yd²	ISO 1763
Stroll test	≤ 2.0 kV	ISO 6356
Use classification	33 Commercial - heavy use	EN 1307
Dimensional stability	≤ 0.2 %	EN 986
Impact sound reduction ΔL _w	24 dB	ISO 140-8
Noise reduction	0.15 α _w	ISO 354
Flammability	B _{fl} - s1 (loose laid tested)	EN 13501-1
Light Reflectance Value (LRV)	See right side page per colour	BS 8493
Colour depth (L)	See right side page per colour	CIELAB

* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: www.desso.com.

** DESSO EcoBase® is a polyolefin based backing.




Cradle to Cradle Certified® is a certification mark licensed by Cradle to Cradle Products Innovation Institute



EN 14041
0493-CPR-0002

Manufactured by

Desso BV
PO Box 169
NL-5240 AD
Waalwijk

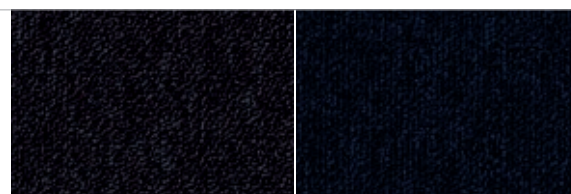


9031
L 17,92 / LRV 2,46

8332
L 15,34 / LRV 1,97




9111
L 19,89 / LRV 2,96

9975
L 30,05 / LRV 6,27

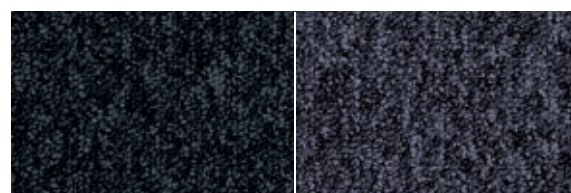


9990*
L 23,42 / LRV 3,92

9013
L 29,87 / LRV 6,18

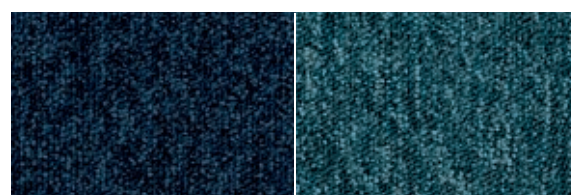


8901*
L 22,32 / LRV 3,60

8111
L 33,91 / LRV 7,97

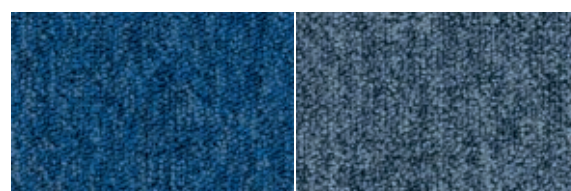


8412*
L 29,20 / LRV 5,92

8803*
L 39,83 / LRV 11,15

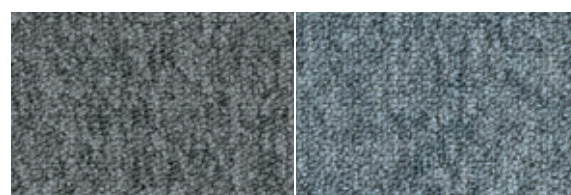

9035
L 46,99 / LRV 16,01

8915
L 50,25 / LRV 18,63

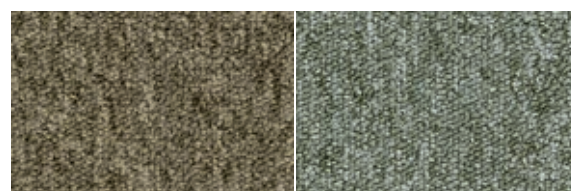

2903
L 46,09 / LRV 15,34

7935
L 56,98 / LRV 24,90




7331
L 31,60 / LRV 6,91


7073
L 45,02 / LRV 14,55



Stratos 8111



3801
L 22,97 / LRV 3,79



2941
L 26,01 / LRV 4,75




4311
L 23,50 / LRV 3,95



4001
L 27,45 / LRV 5,27



9094
L 34,92 / LRV 13,78



2077
L 29,88 / LRV 6,19




5302
L 41,21 / LRV 11,99



6025
L 59,26 / LRV 27,31



9960
L 35,23 / LRV 8,61




9985
L 29,22 / LRV 5,92



9095
L 51,22 / LRV 19,46




2044
L 45,62 / LRV 14,99



7942
L 31,56 / LRV 6,84



9093
L 37,66 / LRV 9,90



2912
L 40,44 / LRV 11,52




9524
L 42,11 / LRV 12,59



9104
L 45,86 / LRV 15,16



9955
L 44,97 / LRV 14,52



9930
L 54,13 / LRV 22,09



9006
L 55,45 / LRV 23,38