


Express Vi Kit for Express Pipes and Fittings DN250-300

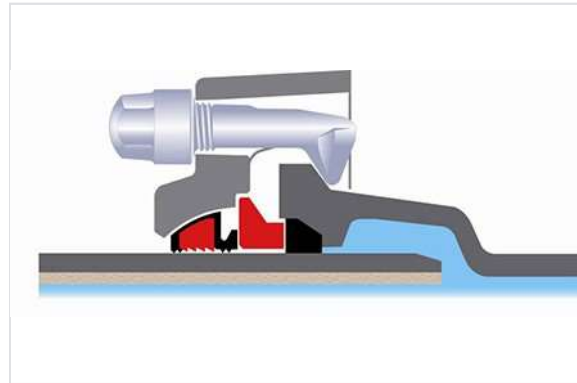

The Express joint is a mechanical joint. The watertightness is made by the axial compression of an elastomer gasket thanks to a gland tightened with iron bolts.

DN	Mass	References
250 mm	27.07 kg	JEB25LTT
300 mm	36.76 kg	JEB30LTT

Field of use:

- For drinking water networks

Main characteristics:

- Elastomer quality: EPDM (EN 681-1)
- Coating of the gland: blue epoxy powder 250 µm conforming to EN14901-1
- Iron bolts (Galvanization + parkerization + black cataphoresis)
- EN 545
- High angular deflection possible

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.