


Geberit PE kulegren 88,5° dobbel, tilkoplinger 135° forskjøvet

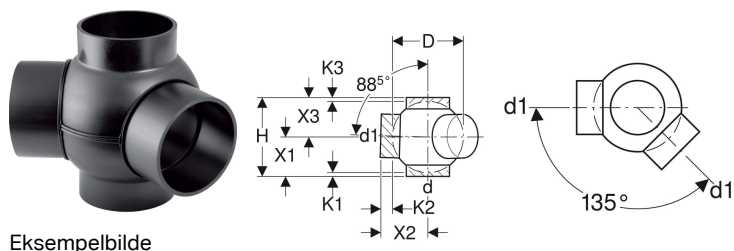

Eksempelbilde

Bruksformål

- For bygningsavløp

Egenskaper

- UV-bestendig

Tekniske data

Materiale

PE-HD

Art. nr.	NRF nr.	DN	d, ø	d1, ø	arc	arc2	D	H	X1	X2	X3	K1	K2	K3
365.375.16.1	2290236	70 / 70	75 mm	75 mm	88.5°	135°	12 cm	16 cm	8 cm	10 cm	8 cm	1.5 cm	3.5 cm	1.5 cm
367.362.16.1	2290249	100 / 40	110 mm	50 mm	88.5°	135°	17 cm	20 cm	10 cm	12 cm	10 cm	1.5 cm	1.5 cm	1.5 cm
367.365.16.1	2290251	100 / 56	110 mm	56 mm	88.5°	135°	17 cm	20 cm	10 cm	12 cm	10 cm	1.5 cm	1.5 cm	1.5 cm
367.370.16.1	2290252	100 / 60	110 mm	63 mm	88.5°	135°	17 cm	20 cm	10 cm	12 cm	10 cm	1.5 cm	1.5 cm	1.5 cm
367.375.16.1	2291697	100 / 70	110 mm	75 mm	88.5°	135°	17 cm	20 cm	10 cm	12 cm	10 cm	1.5 cm	1.5 cm	1.5 cm
367.380.16.1	2290253	100 / 90	110 mm	90 mm	88.5°	135°	17 cm	20 cm	10 cm	12 cm	10 cm	1.5 cm	1.5 cm	1.5 cm
367.385.16.1	2291711	100 / 100	110 mm	110 mm	88.5°	135°	17 cm	20 cm	10 cm	12 cm	10 cm	1.5 cm	4 cm	1.5 cm