


Produktdokumentasjon

OPAL SKJØTELEDNING 2-VEIS

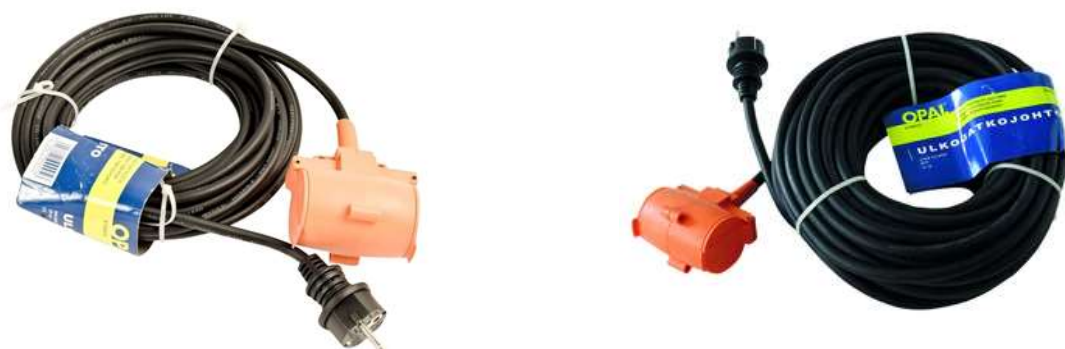

| EL-nummer | NOBB-nummer | Lengde / antall ledere | Kabeltype | Kapslingsgrad | EAN/GTIN |
|-----------|-------------|------------------------------|-----------|---------------|---------------|
| 1503116 | 57740673 | 10 M 3X2,5MM ² | H07RN-F | IP44 | 6413821990223 |
| 1503119 | 53037278 | 20 M 3X2,5MM ² | H07RN-F | IP44 | 6413821990230 |
| 1503117 | 57982498 | 10 M 3X1,5MM ² | H07RN-F | IP44 | 6413821990056 |
| 1503118 | 53037301 | 20 M 3X1,5MM ² | H07RN-F | IP44 | 6413821240427 |

Egenskaper:

Helstøpt plug/kabel forbindelse Maksimal effekt 3500W 16A/250V