



Issuance date: 13.09.2024  
Validation: 17.09.2024  
Validity date: 13.09.2029

## KOMBI & PRK couplings



### Owner of the EPD:

IMI International Sp. z o.o.  
Address: Olewin 50A  
32-300 Olkusz, Poland  
Tel.: +48 32 758 82 00  
Website: [www.imi-hydronic.com](http://www.imi-hydronic.com)

### EPD Program Operator:

Instytut Techniki Budowlanej (ITB)  
Address: Filtrowa 1,  
00-611 Warsaw, Poland  
Website: [www.itb.pl](http://www.itb.pl)  
Contact: Michał Piasecki  
[m.piasecki@itb.pl](mailto:m.piasecki@itb.pl)  
[energia@itb.pl](mailto:energia@itb.pl)



ITB is the verified member of The European Platform for EPD program operators and LCA practitioner [www.eco-platform.org](http://www.eco-platform.org)

### Basic information

This declaration is the Type III Environmental Product Declaration (EPD) based on EN 15804+A2 and verified according to ISO 14025 by an external auditor. It contains the information on the impacts of the declared construction materials on the environment and their aspects verified by the independent body according to ISO 14025. Basically, comparison or evaluation of EPD data is possible only if all the compared data were created according to EN 15804+A2.

**Life cycle analysis (LCA):** A1-A3, A4-A5, C1-C4 and D modules in accordance with EN 15804+A2 (Cradle-to-Gate with options)

**The year of preparing the EPD:** 2024

**Product standards:** EN 12266-1

**Service Life:** >25 years

**PCR:** ITB-PCR A

**Declared unit:** 1 kg

**Reasons for performing LCA:** B2B

**Representativeness:** Poland, Europe, 2022

## MANUFACTURER

As IMI Hydronic Engineering is a leading HVAC company with a valves montage plant located in Olkusz (Poland). Company is provider of technologies that deliver energy efficient water-based heating and cooling systems for the residential and commercial building sectors. Throughout the history, company have been at the forefront of HVAC industry innovation. The portfolio of brands has what is needed – a complete range of unique, industry-leading products and services. IMI Hydronic Engineering is a part of IMI PLC Group, listed on the London Stock Exchange on FTSE 100 list.



Figure 1 The view of IMI International Sp. z o.o. manufacturing plant located in Olkusz

## PRODUCTS DESCRIPTION

Kombi is a flexible compression coupling for metallic pipes, soft and hard copper pipes and soft steel pipes in tap water and heating systems. Document is also applicable for Kombi variants – KOMBI-PX for PEX pipes and KOMBI-MT for Alu/PEX pipes. PRK is coupling suitable for PE pipes, SDR 11 and SDR 17, of material PE40, PE80, PE100 and PE100RC, and can be used both above and underground. Couplings range features IMI Hydronic Engineering's dezincification-resistant alloy, AMETAL, which minimizes the risk of leakage. Couplings are made of components from AMETAL, as well POM for PRK connections and minor aramid fibre, NBR components.

Applications:

Tapwater and heating systems.

Process systems where the media does not affect the incoming material.

Max working pressure 16 bar (PN 10/PN 6 for KOMBI PX/MT).

Temperature range: 40 °C (for PRK); 100 °C (for KOMBI), 95 °C (for KOMBI PX/MT).

All additional technical information about the product is available on the manufacturer's website and [catalogues](#).

## **LIFE CYCLE ASSESSMENT (LCA) – general rules applied**

### **Unit**

The declared unit is 1 kg of compression coupling products. Declared unit refer to different numbers and types of compression coupling; every valve typology contains compression coupling with different dimensions and weights. However, the same manufacturing process and the similarities of compression coupling allow a declared unit based on mass unit of products.

### **System boundary**

The life cycle analysis of the declared products covers “Product Stage” A1-A3, A4, C2-C4+D modules in accordance with EN 15804 and ITB PCR A (cradle to gate with options). Energy and water consumption, emissions as well as information on generated wastes were inventoried and were included in the calculation. It can be assumed that the total sum of omitted processes does not exceed 5% of all impact categories. In accordance with EN 15804+A2, machines and facilities (capital goods) required for the production as well as transportation of employees were not included in LCA.

### **Allocation**

The allocation rules used for this EPD are based on general ITB 's document PCR A. In the modules A1-A3, material losses in the assembly of the products in the factory are defined on the averaged specific values for the site. Input and output data from the production is inventoried and allocated to the production on the mass basis The declaration covers a wide range of products (averaged). Their production resources and processing stages are basically similar, so it is possible to average the production by product volume.

### **System limits**

99.0% materials and 100% energy consumption were inventoried in a factory and were included in calculation. In the assessment, all significant parameters from gathered production data are considered, utilized energy, and electric power consumption, direct production waste, and available emission measurements. The total of neglected input flows per module A1-A3 does not exceed the permitted maximum of 1 % of energy usage and product mass. Tires consumption for transport was not taken into account. The components like: foils, papers, labels, tapes with a percentage share of less than 0.1% were not included in the calculations. It is assumed that the total sum of omitted processes does not exceed 1% of all impact categories. In accordance with EN 15804 machines and facilities (capital goods) required for and during production are excluded, as is transportation of employees.

### **Modules A1 and A2: *Raw materials supply and transport***

The modules A1 and A2 represent the extraction and processing of raw materials (mainly Ametal and plastic elements) and transport to the production site. The process starts with the manufacturing of raw brass and bronze pieces for compression coupling obtained from casting and hot-moulding (activities carried out by IMI in Sweden); For A2 module (transport- inventoried) European averages for fuel data are applied. Production of metal and plastic elements (inputs to production in Olkusz) were inventoried and assessed.

### **Module A3: *Production***

The product specific manufacturing process is presented in Figure 2. The production process is partially automated and is based on receiving metallurgical materials for production. Components previously made go to the factory in Olkusz where they are assembled into one final product. The pieces are mechanically worked and assembled with compression coupling components (e.g. handles, gaskets, balls, fittings, etc.). Some pieces and valve components are coated with chrome and powder, according to the valve typologies in which they are used.

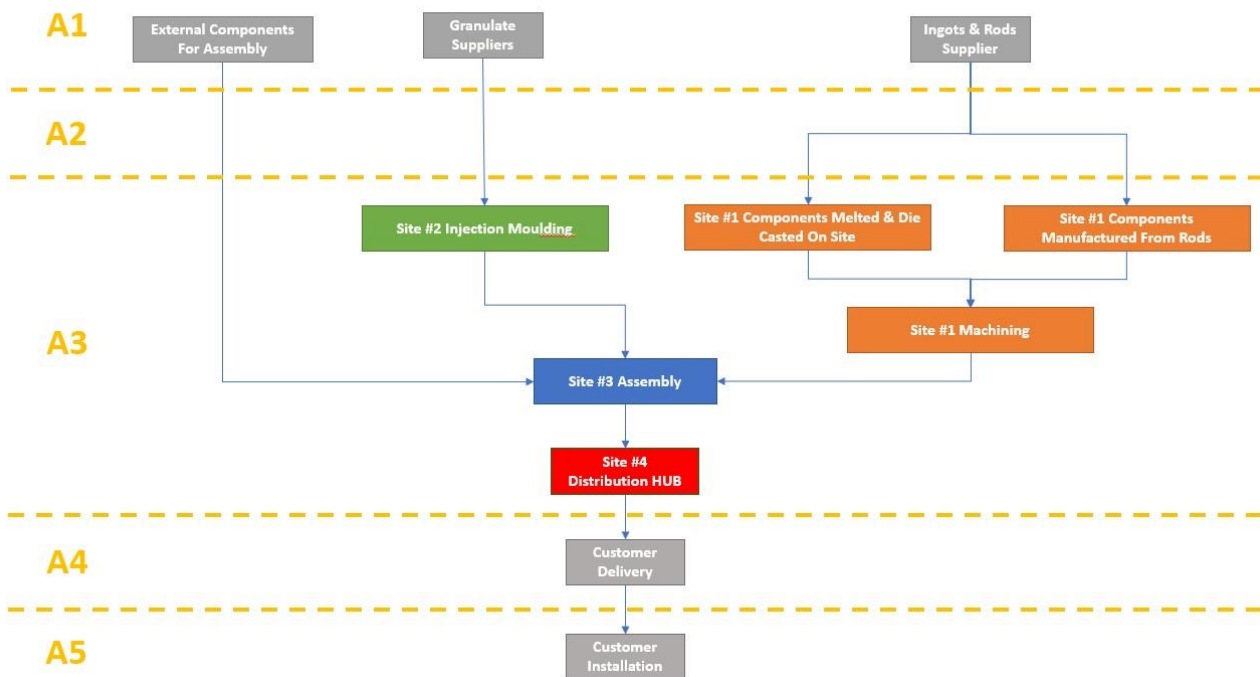


Figure 2 Manufacturing process scheme (A1-A3), with forming/assembly process in Olkusz (A3)

**Module A4: transport to consumer**

Vehicle transport at distance 500 km is considered (emission standard: Euro 5) with 100% load capacity.

**Modules C and D: End-of-life (EOL)**

Due to the fact that the declaration covers a wide range of products for various purposes and usage scenarios, it is not possible to directly specify the de-construction technology and the amount of energy for disassembly in C1 module (so this module is very generic based on literature). In the adapted end-of-life scenario, the de-constructed steel products are transported to a metal mill distant by 100 km on > 16t lorry EURO 5 where are used as scrap to produce a new metals. The recycling potential of C3 module is 98% and it is assumed that only 2% of the products will end up in a landfill – C4 module (Table 1). Module D presents credits resulting from the recycling of the scrap (used for steel production), calculated in accordance with the approach developed by World Steel Association.

Table 1 End-of-life scenario for the KOMBI & PRK couplings

Material	Material recovery	Recycling	Landfilling
metals/alloys	100%	98%	2%
polymers	100%	0%	100%

Electricity at end-of-life (module C) has been modelled using an average Polish electricity mix as the location where the product reaches end-of-life is unknown.

**Data collection period**

The data for manufacture of the declared products refer to period between 01.01.2022 – 31.12.2022 (1 year). The life cycle assessments were prepared for Poland and Europe as reference area.

## Type III Environmental Product Declaration No. 670/2024

### Data quality

The data selected for LCA originate from ITB-LCI questionnaires completed by IMI International Sp. z o. o. and verified during data audit (Sweden, Poland and Germany). No data collected is older than five years and no generic datasets used are older than ten years. The representativeness, completeness, reliability, and consistency is judged as good. The background data for the processes come from the following resources database Ecoinvent v.3.10 (metal ores, copper recyclates, stainless steel, EPDM, PPS, PP TPE, EUR-flat pallet, paper, carton). Specific (LCI) data for Brass production was a part of the input data verification, some specific data comes from Erwitte located plant.

### Assumptions and estimates

The impacts of the representative products were aggregated using weighted average.

### Calculation rules

LCA was performed using ITB-LCA tool developed in accordance with EN15804+A2. Emission of greenhouse gases was calculated using the IPCC 2013 GWP method with a 100-year horizon. Emission of acidifying substances, Emission of substances to water contributing to oxygen depletion, Emission of gases that contribute to the creation of ground-level ozone, Abiotic depletion, and ozone depletion emissions where all calculated with the CML-IA baseline method

### Additional information

The manufacturer provided certificates of origin of electricity from renewable energy sources based on the biomass. Electricity (Ecoinvent v.3.10 data) emission factor (bio based electricity production for Poland) used is 0.056 kg CO<sub>2</sub>/kWh. As a general rule, no particular environmental or health protection measures other than those specified by law are necessary. The product may contain dangerous substances (lead), more than 0,1% by weight, given by the REACH Candidate List.

## LIFE CYCLE ASSESSMENT (LCA) – Results

### Declared unit

The declaration refers to declared unit (DU) – 1 kg of KOMBI & PRK couplings produced in Europe. The following life cycle modules (Table 2) were included in the analysis. The following tables 3-6 show the environmental impacts of the life cycle of selected modules (A1-A5+C1-C4+D).

Table 2 System boundaries for the environmental characteristic of the product.

Environmental assessment information (MD – Module Declared, MND – Module Not Declared, INA – Indicator Not Assessed)																	
Product stage			Construction process		Use stage							End of life				Benefits and loads beyond the system boundary	
Raw material supply	Transport	Manufacturing	Transport to construction site	Construction-installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction demolition	Transport	Waste processing	Disposal	Reuse-recovery-recycling potential	
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
MD	MD	MD	MD	MD	MND	MND	MND	MND	MND	MND	MND	MD	MD	MD	MD	MD	

## Type III Environmental Product Declaration No. 670/2024

*Table 3 Life cycle assessment (LCA) results for specific product – environmental impacts of (DU: 1 kg)*

Indicator	Unit	A1	A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
Global Warming Potential	eq. kg CO <sub>2</sub>	1.40E+00	2.85E-01	1.51E-01	1.84E+00	8.34E-02	6.85E-04	6.85E-03	2.21E-02	6.39E-02	1.06E-03	-8.89E-01
Greenhouse potential - fossil	eq. kg CO <sub>2</sub>	1.41E+00	2.84E-01	1.50E-01	1.84E+00	8.31E-02	6.85E-04	6.85E-03	2.20E-02	6.38E-02	1.05E-03	-8.65E-01
Greenhouse potential - biogenic	eq. kg CO <sub>2</sub>	5.59E-02	9.72E-04	3.08E-03	6.00E-02	2.84E-04	1.85E-06	1.85E-05	7.52E-05	1.33E-05	2.68E-06	1.32E-02
Global warming potential - land use and land use change	eq. kg CO <sub>2</sub>	1.78E-02	1.12E-04	6.21E-05	1.79E-02	3.26E-05	1.07E-07	1.07E-06	8.64E-06	1.01E-05	9.94E-07	-2.24E-02
Stratospheric ozone depletion potential	eq. kg CFC 11	7.92E-08	6.58E-08	1.49E-08	1.60E-07	1.92E-08	3.77E-12	3.77E-11	5.09E-09	7.80E-01	4.26E-10	-1.43E-08
Soil and water acidification potential	eq. mol H <sup>+</sup>	3.50E-02	1.15E-03	3.49E-03	3.97E-02	3.37E-04	7.25E-06	7.25E-05	8.93E-05	5.32E-04	9.90E-06	-4.12E-04
Eutrophication potential - freshwater	eq. kg P	2.74E-03	1.91E-05	4.87E-04	3.25E-03	5.59E-06	1.18E-06	1.18E-05	1.48E-06	4.32E-07	9.81E-08	-7.68E-05
Eutrophication potential - seawater	eq. kg N	6.25E-03	3.48E-04	8.26E-04	7.43E-03	1.02E-04	1.03E-06	1.03E-05	2.70E-05	1.81E-03	3.45E-06	-1.91E-04
Eutrophication potential - terrestrial	eq. mol N	6.18E-02	3.80E-03	6.04E-03	7.16E-02	1.11E-03	8.95E-06	8.95E-05	2.94E-04	3.42E-03	3.77E-05	-2.67E-03
Potential for photochemical ozone synthesis	eq. kg NMVOC	1.92E-02	1.16E-03	1.70E-03	2.21E-02	3.40E-04	2.57E-06	2.57E-05	9.01E-05	7.46E-04	1.10E-05	-1.49E-04
Potential for depletion of abiotic resources - non-fossil resources	eq. kg Sb	1.35E-03	1.01E-06	4.18E-07	1.35E-03	2.95E-07	2.58E-10	2.58E-09	7.80E-08	1.45E-08	2.42E-09	-2.52E-04
Abiotic depletion potential - fossil fuels	MJ	6.85E+01	4.22E+00	5.68E+00	7.84E+01	1.23E+00	1.08E-02	1.08E-01	3.27E-01	6.05E-02	2.89E-02	-5.32E+00
Water deprivation potential	eq. m <sup>3</sup>	1.87E+01	1.95E-02	1.30E-01	1.89E+01	5.70E-03	2.07E-04	2.07E-03	1.51E-03	1.42E-03	9.16E-05	-3.50E+00

*Table 4 Life cycle assessment (LCA) results for specific product – additional impacts indicators (DU: 1 kg)*

Indicator	Unit	A1-A3	A4-A5	C1-C4	D
Particulate matter	disease incidence	INA	INA	INA	INA
Potential human exposure efficiency relative to U235	eg. kBq U235	INA	INA	INA	INA
Potential comparative toxic unit for ecosystems	CTUe	INA	INA	INA	INA
Potential comparative toxic unit for humans (cancer effects)	CTUh	INA	INA	INA	INA
Potential comparative toxic unit for humans (non-cancer effects)	CTUh	INA	INA	INA	INA
Potential soil quality index	dimensionless	INA	INA	INA	INA

## Type III Environmental Product Declaration No. 670/2024

Table 5 Life cycle assessment (LCA) results for specific product - the resource use (DU: 1 kg)

Indicator	Unit	A1	A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
Consumption of renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	5.30E+01	6.05E-02	3.63E-01	5.34E+01	1.77E-02	8.90E-04	8.90E-03	4.69E-03	1.11E-03	2.51E-04	-3.06E+00
Consumption of renewable primary energy resources used as raw materials	MJ	4.30E-01	0.00E+00	0.00E+00	4.30E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Total consumption of renewable primary energy resources	MJ	5.34E+01	6.05E-02	3.70E-01	5.38E+01	1.77E-02	8.90E-04	8.90E-03	4.69E-03	1.11E-03	2.51E-04	-3.06E+00
Consumption of non-renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	6.68E+01	6.68E+01	6.68E+01	6.68E+01	6.68E+01	6.68E+01	6.68E+01	6.68E+01	6.68E+01	2.89E-02	-7.57E+00
Consumption of non-renewable primary energy resources used as raw materials	MJ	2.92E+00	0.00E+00	0.00E+00	2.92E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.01E+00	0.00E+00	0.00E+00
Total consumption of non-renewable primary energy resources	MJ	6.95E+01	4.22E+00	5.81E+00	7.95E+01	1.23E+00	1.08E-02	1.08E-01	3.27E-01	6.06E-02	2.89E-02	-7.57E+00
Consumption of secondary materials	kg	6.40E-01	1.41E-03	6.60E-04	6.42E-01	4.14E-04	9.40E-07	9.40E-06	1.10E-04	2.74E-05	6.07E-06	-1.02E-02
Consumption of renew. secondary fuels	MJ	7.56E-03	1.56E-05	2.50E-06	7.58E-03	4.56E-06	4.75E-09	4.75E-08	1.21E-06	3.72E-07	1.59E-07	-7.02E-06
Consumption of non-renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Net consumption of freshwater	m <sup>3</sup>	3.90E-01	5.31E-04	2.39E-02	4.14E-01	1.55E-04	3.11E-05	3.11E-04	4.11E-05	5.36E-05	3.16E-05	-3.57E-02

Table 6 Life cycle assessment (LCA) results for specific product – waste categories (DU: 1 kg)

Indicator	Unit	A1	A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
Hazardous waste	kg	2.80E-01	4.73E-03	3.67E-02	3.21E-01	1.38E-03	8.38E-05	8.38E-04	3.67E-04	4.35E-09	3.07E-05	-7.76E-02
Non-hazardous waste	kg	7.98E+00	8.41E-02	2.27E-01	8.29E+00	2.46E-02	5.65E-03	5.65E-02	6.51E-03	1.14E-02	4.32E-04	-1.16E+00
Radioactive waste	kg	1.94E-02	3.15E-07	4.03E-06	1.94E-02	9.21E-08	1.62E-09	1.62E-08	2.44E-08	3.23E-07	1.92E-07	-6.16E-01
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	2.74E-02	1.31E-05	9.00E-02	1.17E-01	3.82E-06	7.26E-08	7.26E-07	1.01E-06	4.04E-07	5.78E-08	0.00E+00
Materials for energy recovery	kg	5.45E-05	1.06E-07	1.00E-03	1.05E-03	3.09E-08	1.17E-10	1.17E-09	8.18E-09	5.04E-09	6.85E-10	0.00E+00
Exported Energy	MJ	7.03E-02	0.00E+00	1.65E-02	8.68E-02	0.00E+00	3.46E-05	3.46E-04	0.00E+00	6.17E-02	0.00E+00	0.00E+00

## Type III Environmental Product Declaration No. 670/2024

### Verification

The process of verification of this EPD is in accordance with ISO 14025 and ISO 21930. After verification, this EPD is valid for a 5-year-period. EPD does not have to be recalculated after 5 years, if the underlying data have not changed significantly.

The basis for LCA analysis was EN 15804 and ITB PCR A	
Independent verification corresponding to ISO 14025 (sub clause 8.1.3.)	
<input checked="" type="checkbox"/> external	<input type="checkbox"/> internal
External verification of EPD: Halina Prejzner, PhD. Eng. LCI audit and verification: Michał Chwedaczuk, M.Sc. Eng. LCA, LCI audit and input data verification: Michał Piasecki, PhD., D.Sc., eng.	

*Note 1: The declaration owner has the sole ownership, liability, and responsibility for the information provided and contained in EPD. Declarations of construction products may not be comparable if they do not comply with EN 15804+A2. For further information about comparability, see EN 15804+A2 and ISO 14025.*

*Note 2: ITB is a public Research Organization and Notified Body (EC Reg. no 1488) to the European Commission and to other Member States of the European Union designated for the tasks concerning the assessment of building products' performance. ITB acts as the independent, third-party verification organization (see ISO 17025/17065/17029). ITB-EPD program is recognized and registered member of The European Platform - Association of EPD program operators and ITB-EPD declarations are registered and stored in the international ECO-PORTAL.*

### Normative references

- ITB PCR A General Product Category Rules for Construction Products (v.1.6.,2023)
- PN-EN 12266-1:2012 - Badania armatury metalowej -- Część 1: Próby ciśnieniowe, procedury badawcze i kryteria odbioru -- Wymagania obowiązkowe
- ISO 14025:2006, Environmental labels and declarations – Type III environmental declarations – Principles and procedures
- ISO 21930:2017 Sustainability in buildings and civil engineering works – Core rules for environmental product declarations of construction products and services
- ISO 14044:2006 Environmental management – Life cycle assessment – Requirements and guidelines
- EN 15804:2012+A2:2019 Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products
- ISO 14067:2018 Greenhouse gases — Carbon footprint of products — Requirements and guidelines for quantification
- PN-EN 15942:2012 Sustainability of construction works – Environmental product declarations – Communication format business-to-business
- ISO 20915:2018 Life cycle inventory calculation methodology for steel products
- KOBiZE Wskaźniki emisyjności CO<sub>2</sub>, SO<sub>2</sub>, NO<sub>x</sub>, CO i pyłu całkowitego dla energii elektrycznej. December 2022
- World Steel Association 2017 Life Cycle inventory methodology report for steel products

LCA,LCI, input data verification  
Michał Piasecki, PhD. D.Sc.

Qualified electronic signature

Head of Thermal Physic, Acoustic and Environment Department  
Agnieszka Winkler-Skalna, PhD.

Qualified electronic signature





**Instytut Techniki Budowlanej**

00-611 Warsaw, Filtrowa 1

**Thermal Physics, Acoustics and Environment Department**

02-656 Warsaw, Ksawerów 21

**CERTIFICATE No 670/2024**  
**of TYPE III ENVIRONMENTAL DECLARATION**

Products:

**KOMBI & PRK couplings**

Manufacturer:

**IMI International Sp. z o.o.**

Olewin 50A, 32-300 Olkusz, Poland

confirms the correctness of the data included in the development of  
Type III Environmental Declaration and accordance with the requirements of the standard

**EN 15804+A2**

**Sustainability of construction works.**

**Environmental product declarations.**

**Core rules for the product category of construction products.**


This certificate, issued on 13<sup>th</sup> September 2024 is valid for 5 years  
or until amendment of mentioned Environmental Declaration

Head of the Thermal Physic, Acoustics  
and Environment Department

  
Agnieszka Winkler-Skalna, PhD



Deputy Director  
for Research and Innovation

  
Krzysztof Kuczyński, PhD

Warsaw, September 2024