






# Opus

## Gulvunderlag Parkett



## Aquastop Ultra Natur 2 mm

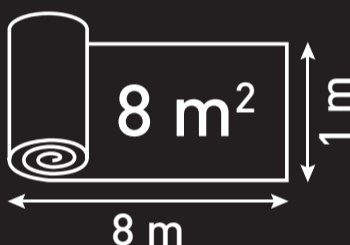

Information on the emission level of volatile substances in the air inside a room that poses a risk of inhalation toxicity on a scale from class A+ (very low emission) to C (high emission).

### NOR

#### PROFESJONELT UNDERLAG FOR FLYTENDE INSTALLASJON AV TREGULV

Materiale: PUM/PET

Over 93% naturlige ingredienser, og 100% resirkulerbart. Inneholder ikke formaldehyd. Flott løsning for gulvvarme - den svært lave verdien for termisk motstand resulterer i effektivt utnyttelse av gulvvarmen og sparer energi. Meget god på akustikk og reflektert ganglydisolasjon. Høy trykkfasthet sikrer låser og minimerer knirk.

### EN

#### PROFESSIONAL UNDERLAY DEDICATED FOR WOODEN FLOOR, INSTALLED AS FLOATING FLOOR (E.G. ENGINEERED WOOD)

Material: PUM/PET

Made in over 93% from natural ingredients and it is 100% recyclable. It does not contain formaldehyde. Great solution for underfloor heating - the very low coefficient of thermal resistance [0,008 m²K/W] results in effective performance of underfloor heating and saves energy. Very good acoustic specification: acoustic isolation (IS) - 17 dB, as well as reflected walking sound insulation (RWS) - 25%. High compressive strength (CS) secures locks and minimise of creaks of wooden floor.



Nobb 56838944



7 043614 022139

### Optimera AS

Postboks 40 Haugenstua  
0915 Oslo  
Tel.: 22 16 88 00  
www.optimera.no