

Bruksområde

ESSVE Gaffelanker er beregnet for forankring av takstoler mot underliggende trekonstruksjoner.

Beskrivelse


Produsert av 1,5 mm varmforsinket stålplate. Den har 5 mm hull.

Tekniske data

Materiale	Stål S250GD
Nedre strekkgrense, f_{yk}	Min. 250 MPa
Overflatebehandling	Varmforsinket 20 μm
Korrosivitetsklasse	C2
Spikerhull \varnothing	5,0 mm

Montering

Gaffelanker monteres med f. eks ESSVE 4 mm Beslagspiker eller 5 mm ESSVE Beslagsskrue

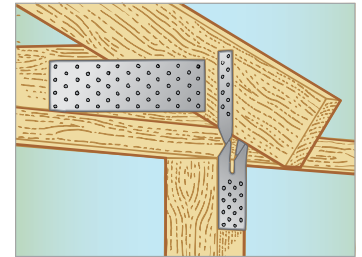

Gaffelanker, Varmforsinket



Art.nr	NOBB nr	Dimensjon a x b x c x d mm	Hull Beslagspiker/- skruer Antall/flik x \varnothing mm	CE merket	Ant/ forp	Ant/ pall	Art. type
451295	46427182	50x60x320x1,5	9+9+16x \varnothing 5,0	CE	25	800	L

Gaffelanker, Varmforsinket

Art.nr	NOBB nr	Dimensjon a × b × c × d mm	Hull beslagspiker/skrue Antall×Ø mm	CE merket	Ant/ forp	Ant/ pall	Art. type
451298 7	4642719	390×36×1,5	7+7+43×Ø5	CE	25	1000	L
451301 1	4642720	390×48×1,5	7+7+43×Ø5	CE	25	1000	L

