

DATABLAD


PE-krage - SDR 11 for Vann og Gass



PRODUKT BILDE



TEGNING MED MÅL

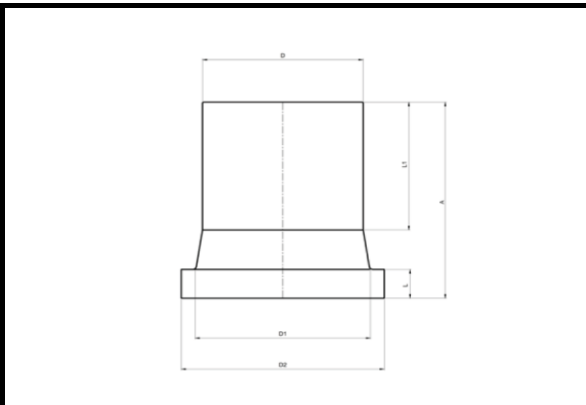

Serie

1256/26

AVK ref. nr.	NRF nr.	D mm	D1 mm	D2 mm	L mm	L1 mm	A mm	Vekt Kg
SFHK20N		20	28	45	7	55	80	0.024
SFHK25N		25	34	58	9	62	81	0.038
SFHK32N		32	42	68	10	61	86	0.052
SFHK40N		40	51	78	11	60	88	0.082
SFHK50N		50	62	88	12	63	92	0.122
SFHK63N	2265067	63	78	102	14	88	120	0.2
SFHK75N	2265068	75	92	122	16	97	130	0.31
SFHK90N	2265069	90	108	138	17	103	140	0.44
SFHK110N	2265071	110	125	158	18	113	155	0.68
SFHK125N	2265072	125	135	158	20	120	159	0.78
SFHK140N	2265073	140	155	188	25	128	190	1.318
SFHK160N	2265074	160	175	212	25	155	200	1.62
SFHK180N	2265075	180	188	212	30	152	207	1.96
SFHK200N	2265076	200	232	268	32	153	210	2.68
SFHK225N	2265077	225	238	268	32	129	180	3.108
SFHK250N	2265078	250	288	320	35	140	205	3.782
SFHK280N	2265079	280	288	320	35	145	211	4.724
SFHK315N	2265081	315	338	375	35	160	224	6.346
SFHK355N	2265082	355	376	435	45	172	240	9.188
SFHK400N	2265083	400	430	485	50	181	264	12.7
SFHK450NP	2265084	*450	465	545	66	195	360	21.77
SFHK500NP	2265085	*500	530	590	60	212	354	25.06
SFHK560NP	2265086	*560	618	690	80	235	423	38.8
SFHK630NP	2265087	*630	645	690	65	255	404	42.4

Materiale:	PE100 Sort
Type:	Lang krage
Varemerke:	Fusamatic
Prosess:	Sprøyttestøp
Applikasjon:	Vann og Gass
Standard:	EN12201-3 & INSTA SBC EN 1555-3 & INSTA SBC AS/NZS4129



FUSION PLASTICS LTD reserve the right to revise this product specification document, while maintaining compliance with the requirements of the product without prior notice. Tolerance on diameters and thickness according to the relevant standards unless otherwise specified. Tolerance: ±5%

Member of the **AVK** group

Opprettet dato:

KJMY/een 18/02/2019