




Mounting and operating instruction

For article no's starting with AA, except for AAS

EAC


17.657-03









0- ... bar


0- ... °C


Acc.PED (97/23/EC) §3.3












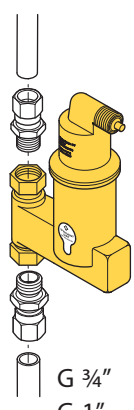
< 50% glycol



ø22mm




0 bar



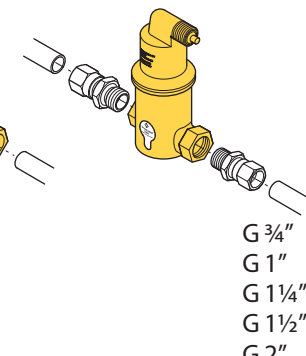
G 3/4"
G 1"


ø22mm



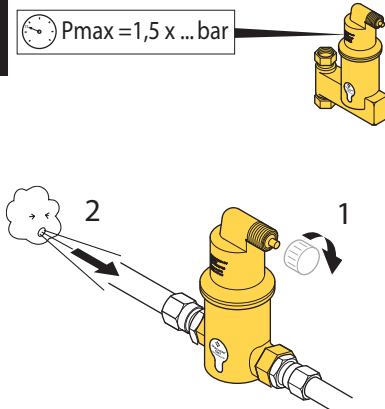
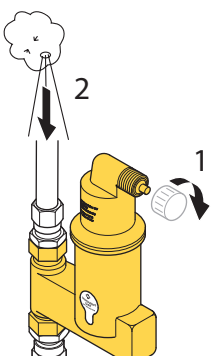
0 bar



G 3/4"
G 1"
G 1 1/4"
G 1 1/2"
G 2"



Pmax = 1,5 x ... bar

1

2

