



WOOD


Access



Product
Datasheet
2012

WOOD

Access

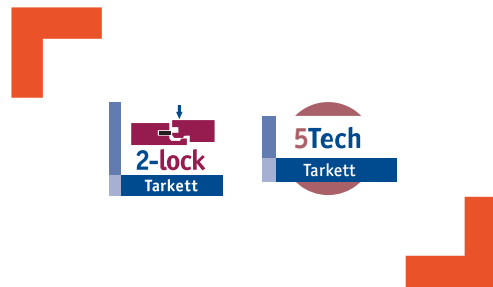

TECHNICAL INFORMATION	ACCESS
Thickness	14 mm
Width	194
Length	2281
Wearlayer thickness (mm)	app. 3,5
Weight (kg/m ²)	app. 7,9
Taber Abraser/Lacquer's wear resistance* prEN 13696	
abrasion penetration 5Tech.(revs)	>2500
abrasive wear (mg/100revs)	app. 3,5
Reduction of sound weighted index index "footfall" to the room below. NF EN ISO 140-8 / Acc to NF EN ISO 717-2, ΔL_{w} in dB with 2 mm Tarkofoam/flex II	17
Formaldehyde emission EN 13986	E1
Reaction to Fire EN 13501	D _{fl}
Thermal insulation value (RT m ² K/W)	
board only	0,101
with rag felt	0,121
with 2 mm Tarkofoam/flex II	0,141
Installation**	Floating / Glue down
Underfloor heating compatible***	Maximum floor surface temperature 27°C with self-regulating under-floor heat system.

* Data show results with new components according to 2006 update.
Method not applicable for stained or brushed products due to the structured surface.

** Contact your flooring supplier for further information.

*** Not suitable for the woodspecies beech and maple.

Access 5Tech Lacquer / 5Tech Matt Lacquer

TARKETT BALANCED CHOICE	97 % 97 %	100 %	 <small>*TVOC AT 28 DAYS</small>
	Natural Renewable	Recyclable	

ACCESS	Lacquer 2-lock
3-strip 14 x 2281 x 194 mm	
Oak Original	•
Oak Rhapsody	•
Beech Original	•
Beech Classic	•
4-strip 14 x 2281 x 194 mm	
Oak Original	•
Oak Rustic	•
Beech Original	•