

Staple type: S16 Staples

16 GAUGE STAPLES MEDIUM CROWN

Wire Ø: 1.53mm


**Suitable for the following tools\*:**

Paslode S200 S16

3200/50 S16 PQ

4200/50 S16 PQ

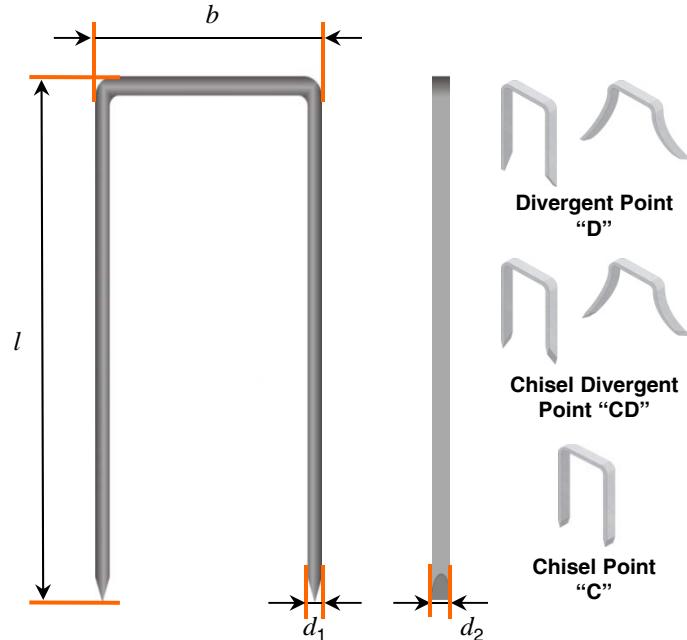
\*please check staple length compatibility with each tool before use

Staple lengths available: 19mm – 63mm

Staples per strip: 70 - 75

**CORROSION PROTECTION**

| Finish                                      | Usage Environment                    | Label Colour on Packaging |
|---|--------------------------------------|---------------------------|
| Zinc Galv 1-3µm                             | INDOOR                               | Blue                      |
| Stainless Steel A4<br>AISI 316 / WNr 1.4401 | INDOOR, COVERED<br>OUTDOOR & OUTDOOR | Yellow                    |


**STAPLE PROPERTIES / DIMENSIONS**

 Tensile strength of wire: min 880 N/mm<sup>2</sup>

Nominal diameter (d): 1.53mm

 Flattened wire dimension: (d<sub>1</sub>): 1.30mm  
(d<sub>2</sub>): 1.60mm

Outside crown width (b): 13.00mm

Strip length: approx 120.00mm

Standard point: "C" / "D" / "CD"

 Coated leg length: "C" = Full  
"D" & "CD" = Partial

**STAPLE LENGTHS AVAILABLE\***

| Finish                                      | Lengths Available<br>*Other lengths on request   |
|---|--|
| Zinc Galv 1-3µm                             | 'C' Point: 19mm, 25mm, 28mm, 32mm, 35mm<br>38mm, 41mm, 45mm, 51mm, 63mm<br>'D' Point: 19mm, 25mm, 38mm<br>'CD' Point: 22mm, 32mm, 44mm |
| Stainless Steel A4<br>AISI 316 / WNr 1.4401 | 38mm, 50mm   |

Paslode is a brand of the ITW Group. ITW reserves the right to change specification without notice. All design using this data should be carried out by a qualified structural engineer, subject to relevant National and European standards or regulations.