



Type	: Mercury and Lead Free Button Cell
Chemical System	: Zinc/Manganese Dioxide
Nominal Voltage	: 1.5Volts
Nominal Dimensions	: Ø11.6mm×3.05mm
Application	: Watch (with alarm), calculator, electronic toys, melody card, ... etc.
Average Weight	: 1.0g
Date Code	: Unless otherwise specified, each cell Will carry a numeric year code and an alphabetical month code.
Shelf Life	: 12 months shelf life after delivery .
Close Circuit Voltage	: 1.30Volts (min.)(load resistor 300Ω at 20 ± 2 °C for 0.1 to 2 seconds)
Nominal Service Life	: 130 hrs (load 3.9kΩ to cut off 1.0V under 20 ± 2 °C)
Average Service Capacity	: 44mAh (load 3.9kΩ to cut off 1.0V under 20 ± 2 °C)

Cross References:			
IEC	Maxell	Duracell	Others
LR54	JR1130	LR54	V10GA, AG10

Model No.: **GP189F**

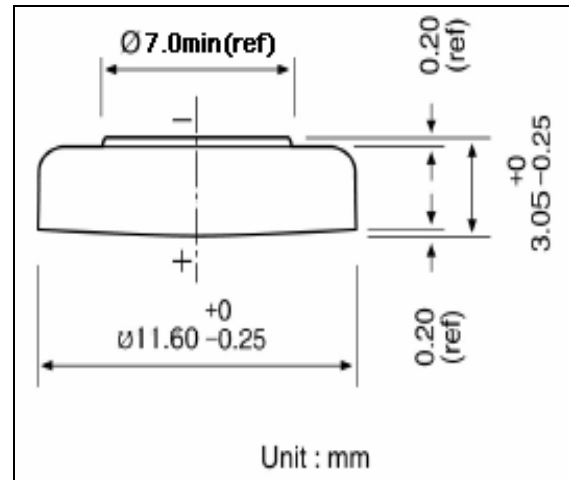

Typical discharge curve when 3.9kohm load

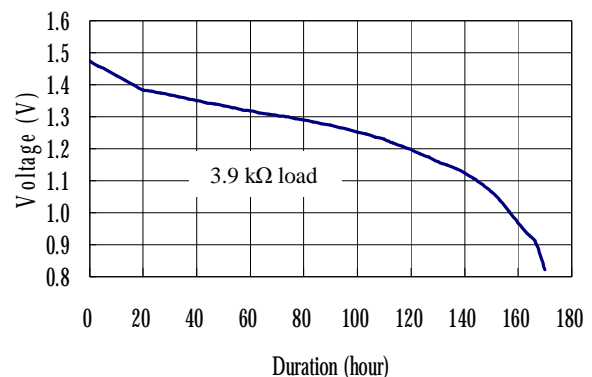


Typical Discharge characteristics at 20 ± 2 °C

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

www.gpbatteries.com

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.
Copyright©GPI International Ltd. – All rights reserved

BQS1057 Rev.02

 Member
Gold Peak Group