

MARINE GIR FOR DREIESPJELDVENTILER / MARINE GEAR FOR BUTTERFLY VALVES


SIP

MATERIALE

Støpejern (GG-25). Svart coating C4 behandling fra 2016.

MATERIAL:

Cast iron (GG-25). Black coating C4 treatment from 2016.

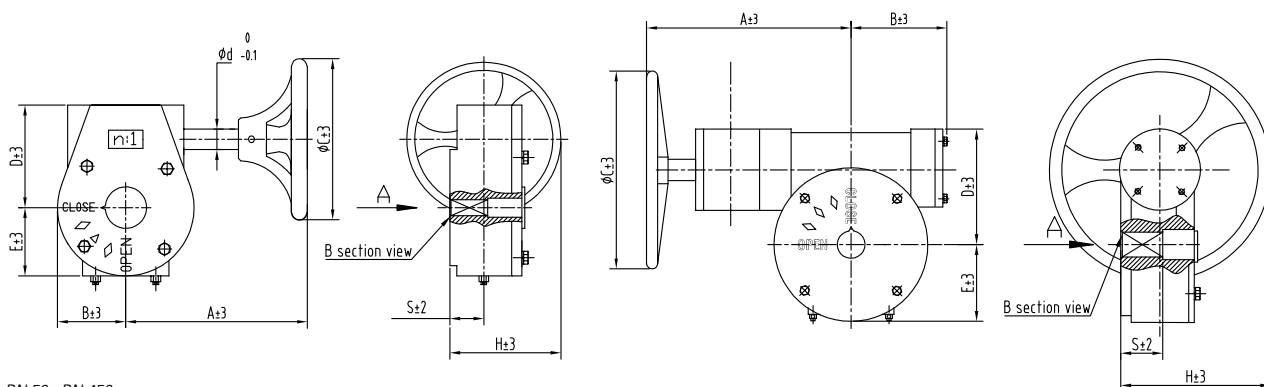


DN 50 - DN 450

HS CODE INT. 8481.80

19

Dn	Vare nr. Part no.	M SQ	A mm	B mm	øC mm	ød mm	D1 ISO-top 5211	n:1 Transmission	Turnes open/closed	Torque N x M	Vekt Weight Kg
50-80	5533991	11	153	31,5	146	16	F07	24:1	6	150	4,2
100-125	5533992	14	153	31,5	146	16	F07	24:1	6	150	4,2
150	5533993	17	153	31,5	146	16	F07	24:1	6	150	4,2
200	5533994	17	235,5	73	288,5	19	F10	30:1	7	500	10
250	5533995	22	235,5	73	288,5	19	F10	30:1	7	500	10
300-350	5533996	27	231	78,5	288,5	19	F12	50:1	12	1200	12
400	9508193	36	277	127	290	25	F14	80:1	20	2500	25
450	9508194	36	277	127	290	25	F14	80:1	20	2500	25
500	9508195	36	340	130	290	25	F14	260:1	65	3000	35
600	9508196	46	342	133	384	25	F16	290:1	72	4000	45
700-800	9508197	46	363	142	384	32	F25	290:1	72	8000	63

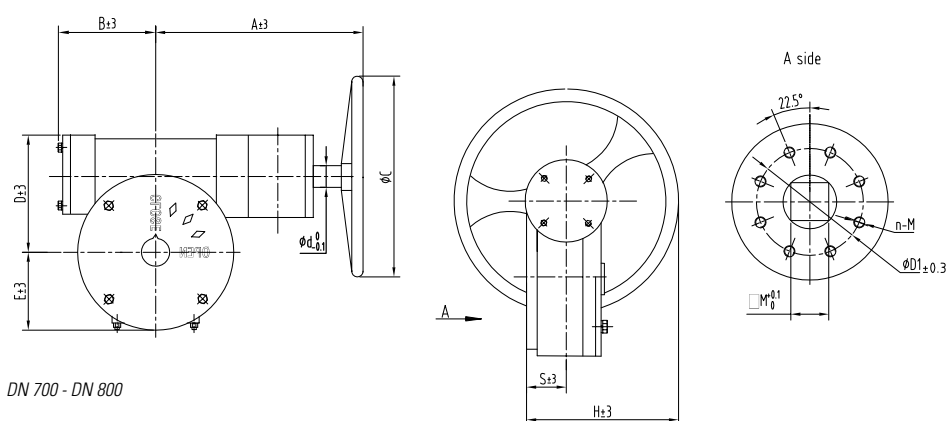

DN 700 - DN 800

Materiale hus: 2"-18 GG25 / 20"-40 GGG40

Aksling: SS316

Gir: Aluminium Bronze

Bolt, mutter and skive: A4-70

Maling: C4

Material gear box: 2"-18 GG25 / 20"-40 GGG40

Shaft: SS316

Gear: Aluminium Bronze

Bolt, nut and washer: A4-70

Coating: C4