

MORE FROM WOOD.




Revision: 02
Approved: 10.12.2025

Self-Declaration According to ISO14021

Environmental & Health Data Sheet

EGGER Laminates

EGGER Laminate

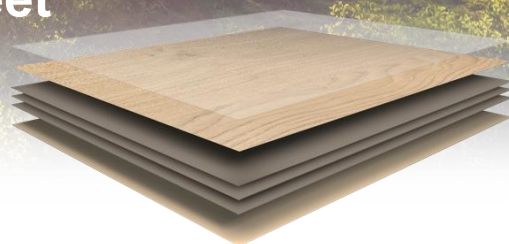

LEED
WELL v2™
BREEAM International v6
DGNB
QNG
CAM Italy
Nordic Swan



Our EcoFacts show the environmental impact of our product at a glance.*



GWP-total**: 2,03 kgCO₂/m²
GWP-fossil: 2,69 kgCO₂/m²
GWP-biogenic: 0,07 kgCO₂/m²
GWP-luluc: 0,002 kgCO₂/m²



100% Primary raw materials



44% material from renewable resources,
48% material from fossil resources
8% material from mineral resources

*EcoFacts may differ from EcoFacts on EGGER-Website due to other calculation bases. EcoFacts Circularity and Renewable Resources are based on recipe specific internal calculations.

**Link to EPD provided in chapter "Relevant Documents". The Environmental Product Declaration is valid for the nominal thicknesses 0.60 and 0.80 mm.



Table of Content

Raw Materials & Primary Products2

Wood Origin.....2

Constituent Materials2

Product Emissions and Health Aspect.....3

Processing & Use4

Safety, Processing and Maintenance Instructions4

End of Life – Reuse, Recycling, Incineration4

Compliances and Certifications5

Production Plants and their Certifications5

Compliance with Building Certificates5

Relevant Documents for Building Certificates6

Footnotes14

Plant Addresses.....14

List of Abbreviations14

Raw Materials & Primary Products

Wood Origin

The papers used in our plants are certified according to the standard [ISO 38200:2018](#). Further information about our principles for sustainable forest management and wood purchase can be found in our [Manufacturer Declaration on Sustainable Forestry VRG 229](#), for information on our timber origin please refer to our [Manufacturer Declaration on Timber Origin VRG 270](#). Upon request, our products can be listed on our sales documents with additional 3rd party certification claims, depending on their availability during production. Links to the certificates can be found in the [relevant documents for building certificates](#).

Constituent Materials

EGGER Laminates are constructed by fusing multiple layers and consists of melamine resin impregnated decor paper and several phenolic resin impregnated core layers. The table below contains 99.9% of the primary products, measured by dry weight. Proportions may vary between individual product thicknesses. Listed is the average for the nominal thicknesses 0.6 and 0.8 mm and all production plants based on the values from fiscal year 2024. All chemicals have been evaluated and are disclosed down to 1000 ppm.

Proportion		Function	Composition
50	%	Paper core layers, decorative paper and overlay paper	< 1% overlay paper, 14% decorative paper, 75% soda kraft papers (core layers), 10% raw papers (core layers)
31	%	Phenol-formaldehyde resin	Polymer on a phenol and formaldehyde basis*
12	%	Melamine-formaldehyde resin	Polymer on a melamine formaldehyde basis*

Proportion	Function	Composition
3 %	Flexibilizer	Di-ethylene glycol
3 %	Hardener	Ammonium salt in water
< 1 %	Corund	Corund
< 1 %	Release agent	Blend of ethoxylated and modified alcohols
< 1 %	Wetting agent	Surfactant mixture in aqueous solution
< 1 %	Plasticizer	Acrylate-based plasticizer

*During the pressing process, the aminoplastic adhesive hardens fully. Under normal conditions, it is bound to the wood and chemically stable.

Product Emissions and Health Aspect

The product emits formaldehyde and volatile organic compounds. During the EGGER Laminates manufacturing processes, heat and pressure is applied in a short cycle press. The used resins are cured in the production process. In the use phase, the product is chemically stable under normal conditions. There are no known health hazards or adverse health effects to be expected under normal conditions, when the product is used as intended.

The product is subjected to annual emission tests within the scope of TÜV PROFiCERT-product Interior surveillance by an independent third party. These tests are done at each plant, thus the TÜV PROFiCERT-product Interior certificates are plant-specific, too. Your local sales person can provide you with the according documentation.

Requirements listed as met "via TÜV PROFiCERT" are NOT CERTIFIED stand-alone in this category!

The following table contains an overview of requirements, on which the product has been tested by an independent third party and fulfills the emission requirements. For further information and for emission thresholds, please refer to the "Criteria for Allocation Interior", available at the [PROFiCERT-Website](#).

Requirements	Substance/Indicator	Fulfillment	Requirement Details
E1 (E05)	Formaldehyde	✓	Formaldehyde class E1, external testing, compliant with REACH already as raw board
TSCA Title VI	Formaldehyde	✓	U.S. Toxic Substances Control Act, external certification (core board)
AgBB 2024	VOC, Carcinogens	✓	Via TÜV PROFiCERT-product interior Standard
MVV TB / ABG, 2023/1	VOC, Carcinogens	✓	
French VOC regulation, Emission Class A	VOC	✓	
Belgian VOC Regulation	VOC	✓	
CAM Italy (Building Products)	VOC, Formaldehyde, Carcinogens, Harmful Substances	✓	
Austrian Ecolabel, Guideline UZ 07	VOC	✓	
ChemVerbotsV E1 DE 2020	VOC, Formaldehyde, Carcinogens, Harmful Substances	✓	
LEED v4 (Outside of North America)	Formaldehyde	✓	
BREEAM General Level	VOC, Formaldehyde, Carcinogens	✓	

Requirements	Substance/Indicator	Fulfillment	Requirement Details
QNG Anforderungskatalog 313, Version 1.3	Formaldehyde, VOC	✓	Additional with TÜV PROFiCERT-product interior PREMIUM
French VOC Regulation, Emission Class A+	VOC	✓	
Finnish M1 Classification	VOC	✓	
DGNB	Formaldehyde, VOC	✓	
BREEAM Exemplary Level	VOC, Formaldehyde, Carcinogens	✓	
Austrian Environmental Label, Guideline UZ 07	VOC	✓	
CAM Italy (Furniture)	VOC, Formaldehyde, Harmful Substances	✓	

Processing & Use

Safety, Processing and Maintenance Instructions

This product is not hazardous in the form in which it is shipped by the manufacturer. Downstream activities (e.g. grinding, sanding, cutting or pulverizing) may generate wood dust, which is hazardous. Wear a respiratory mask if using hand tools without a dust extraction device. Observe all liability insurance association regulations for commercial processing operations (e.g. safety goggles).

For further information on safety, processing or maintenance instructions, see:

- [Technical Datasheet](#)
- [Processing Instructions](#)
- [Cleaning and Care Instructions](#)

End of Life – Reuse, Recycling, Incineration

Waste code according to European Waste Catalogue, depending on origin of the waste:

- 17 02 01 Construction & Demolition Waste Wood or
- 03 01 05 Sawdust, Shavings, Cuttings, Wood, Particle Board and Veneer Not Containing Hazardous Substances

In addition to our usual packaging, certain versions of this product may be delivered with a protective film on its surface. This specific packaging material has the following waste code:

- 15 01 02 Plastic Packaging

The product is not classified as hazardous waste. Used EGGER Laminates can be classified as glued, laminated waste wood without halogenated compounds and without wood preservatives. See also the documents available for download at www.egger.com/environment:

- [Manufacturer Declaration on Wood preservatives](#)
- [Manufacturer Declaration on halogenated organic compounds](#)

Reuse	Reuse of this product is generally not possible due to its bonding with a carrier board. However, reuse of a carrier board with laminate is usually feasible if separate demolition is possible.
Recycling	Leftovers which accrue on the construction site as well as those from deconstruction measures cannot be routed to a material utilization stream because laminate is not recyclable. Using as post-consumer recycling material for the manufacturing of new laminate is not possible.
Incineration	After its utilization phase, the product should be separated and routed to an energetic recovery, due to its high calorific value. Upon incineration, kindly observe all locally applicable legal requirements for the correct dimensions, required filter technologies, operating conditions, and legal permissions for burning wood-based panels/Particleboards.

Compliances and Certifications

Production Plants and their Certifications

The product is manufactured at the following locations. You can find the certifications available for download linked in the column headings of the table below. The plant addresses are available in the [footnotes](#).

Plant	Certification Obtained by This Plant or Product				
	<u>Quality</u> (ISO 9001)	<u>Environment</u> (ISO 14001)	<u>Energy</u> (ISO 50001)	<u>Wood origin</u> (ISO 38200)	<u>TÜV PROFICERT-Product Interior</u>
Gifhorn, DE	✓	✓	✓	✓	PREMIUM
St. Johann in Tirol, AT	✓	✓	✓	✓	PREMIUM

Compliance with Building Certificates

An analysis was carried out for the requirements of the following certificates and we can state that EGGER Laminates is compliant as listed in the tables below. To fulfill some of the requirements of specific building certificates it is necessary to conduct an analysis of all used building products. This means that we cannot ensure the acquiring of points and that an individual assessment is necessary for each project. Also, our product may contribute beyond the listed requirements. If not otherwise mentioned, we can provide you with the necessary documents.

General Information:

Some building certificates, for example LEED v4.1 and WELL v2™ certification schemes, demand third party certification for gathering additional points in some of their optimization credits. At this point our product is **not certified** with the following certifications:

- Cradle to Cradle, Declare, Global Green TAG, Health Product Challenge, Living Product Challenge

In doubt, please refer to the certification program holder themselves.

Please note that our products are not certified or validated in any way by the building certification program holder. Reworking or manipulating the product (e. g. milling, sanding, drilling, coating or lacquering) may change product properties and thus invalidate certificate applicability. Fabricators need to test and certify their reworked or manipulated product on their own.

Click on the desired certificate for easy navigation to detailed information:

LEED v4.1	✓	QNG	✓	BREEAM International v6	✓
WELL v2™	✓	DGNB	✓	Nordic Swan	✓
CAM Italy	✓				

Relevant Documents for Building Certificates

Please click on the desired document to be redirected.

Relevant Documents	LEED	BREEAM	WELL	DGNB	QNG	CAM Italy
Environmental Product Declaration (EPD)	✓	✓		✓	✓	
TÜV PROFiCERT-interior PREMIUM**	✓	✓	✓	✓	✓	✓
Testing Protocols**				✓	✓	
3 rd Party Wood Certificate* **	(✓)	(✓)		(✓)	(✓)	(✓)
Certificate ISO 38200:2018	✓	✓			✓	✓
Technical Datasheet*					✓	
Cleaning Instructions						
Processing Instructions						
Laminates with Protective Film						
Manufacturer Declaration on Timber Origin	✓			✓	✓	✓
Manufacturer Declaration on Sustainable Forestry						
Manufacturer Declaration Asbestos			✓			
Manufacturer Declaration HFR**			✓			
Manufacturer Declaration PFAS**			✓			
Manufacturer Declaration REACH	✓			✓	✓	
Manufacturer Declaration Wood Preservative				✓		
Manufacturer Declaration on Biocides**				✓	✓	
Manufacturer Declaration RoHS	✓					

✓ : relevant *depends on bought product ** please contact your sales person for document acquiring or via email: environment@egger.com

Compliance with LEED v4.1

The following table shows all LEED credits which are applicable to the usage of our product. As the achievable number of points depends on the attributes of all used materials in the LEED building project and further actions by the constructor, we cannot guarantee to obtain the maximum score.

For full requirement terms see LEED credit library at [USGBC | U.S. Green Building Council](#).

LEED Projects Outside U.S.

Please note that formaldehyde emission requirements in LEED v4.1 are deviating for projects inside U.S.

LEED v4.1 Requirements for Building Design + Construction (BD + C)

New Construction, Core and Shell, Schools, Retail, Healthcare, Data Centers, Hospitality, Warehouses and Distribution Centers

LEED v4.1 Requirements for Interior Design and Construction (ID + C)

Commercial Interiors, Retail, Hospitality

Please note that reworking or manipulating the product (e. g. milling, sanding, drilling, coating or lacquering) may invalidate the applicability of the following table.

Credit Category	Credit Name and Description	Product Contribution	Maximum Points
Material and Resources	Environmental Product Declaration Option 1: Environmental Product Declaration	This product has a verified <u>Environmental Product Declaration (EPD)</u> according to ISO 14025 and EN 15804 + A2.	1 point
	Sourcing of Raw Materials Wood products - Wood products must be certified by the Forest Stewardship Council® or USGBC-approved equivalent. Recycled content - Recycled content is the sum of postconsumer recycled content plus one-half of the preconsumer recycled.	The product can be purchased in 3rd party certified qualities on request , e.g. PEFC. Use delivery receipt as evidence document. Please see chapter " <u>Wood Origin</u> " for further information. This product contains no recycled content.	2 points 0 points
	Material Ingredient Material Inventory The manufacturer has published complete content inventory of the product to at least 0.1% (1000ppm).	Please see chapter " <u>Constituent Materials</u> " for content inventory.	1 point
	Low-Emitting Materials VOC Emissions Evaluation Alternative compliance path: - Compliance with German AgBB Testing and Evaluation Scheme Formaldehyde Emission Evaluation - Alternative compliance path: - Compliance with European E1	Product complies with the LCI values of the German AgBB Testing and Evaluation scheme. Product is tested per EN 717-1:2014 for formaldehyde emissions and complies with emissions class E1E05. See chapter " <u>Product Emissions & Health Aspects</u> " above for further information. Use the <u>TÜV PROFiCERT-product interior certificate</u> as evidence document.	Up to 3 points
Indoor Environmental Quality			

LEED Projects inside U.S.

LEED v4.1 Requirements for Building Design + Construction (BD + C)

New Construction, Core and Shell, Schools, Retail, Healthcare, Data Centers, Hospitality, Warehouses and Distribution Centers

LEED v4.1 Requirements for Interior Design and Construction (ID + C)

Commercial Interiors, Retail, Hospitality

Please note that reworking or manipulating the product (e. g. milling, sanding, drilling, coating or lacquering) may invalidate the applicability of the following table.

Credit Category	Credit Name and Description	Product Contribution	Maximum Points
Material and Resources	As the requirements are identical for those for projects outside the U.S., please refer to the table for LEED Projects outside U.S.		
Indoor Environmental Quality	Low-Emitting Materials - VOC Emissions Evaluation Product has been tested according to CDPH Standard Method v1.2-2017 - Formaldehyde Emission Evaluation Certified as ultra-low emitting formaldehyde (ULEF), Certified as no added formaldehyde resins (NAF)	The product is not tested in the way these criteria require.	-
		The product does not fulfill ULEF requirements. For core board and decorative surface glue and resins on a formaldehyde base are used.	

Compliance with WELL Building Standard v2™

EGGER Laminates is compliant with the preconditions for use in WELL v2 certified building. Beyond that the usage of this product may contribute to gathering additional points within the WELL scoring system. As the actually achievable number of points depends on the attributes of all materials used in the building project and further actions by the constructor, we cannot guarantee to obtain the maximum score.

For full requirement terms please see: [Standard | WELL V2](#)

The following table shows all WELL features which are applicable to the usage of our product.

Please note that reworking or manipulating the product (e. g. milling, sanding, drilling, coating or lacquering) may invalidate the applicability of the following table.

Concept	Feature and Description	Product Contribution	Maximum Points
X01 Material Restrictions	Part 1: Restrict Asbestos	The product complies with this precondition. Use Manufacturer Declaration – Asbestos for evidence.	Precondition
X05 Enhanced Material Restrictions	Part 2: Select Compliant Interior Furnishings and Interior Product Ceiling and wall finishes and demountable wall partitions contain 100ppm by weight or less of the following: - Halogenated flame retardants (HFR) - Orthophtalates	The product complies with this requirement. No halogenated flame retardants (HFR) are used in this product. In general, no softening agents are used in the production of Particleboards, in particular phthalates. See chapter " Constituent Materials " above for your documentation. See Manufacturer Declaration on the Use of Halogenated Compounds for evidence.	1 point

X06 Volatile Compounds	Part 2: Restrict VOC Emissions from Furniture, Architectural and Interior Products Tested per methods and VOC emission threshold established in one of the following: - CDPH - AgBB 2. All Composite wood panels meet one of the following: - European E1, TSCA, F**** or LEED v4.1	Product complies with the LCI values of the German AgBB scheme. The product is tested per EN 717-1:2014 for formaldehyde emissions and complies with emissions class E1E05. See chapter "Product Emissions & Health Aspects" for further information. Use the <u>TÜV PROFiCERT-product interior certificate</u> as evidence document.	Up to 4 points
X07 Material Transparency	Part 1: Selects Products with Disclosed Ingredients h) A manufacturers inventory down to 1000ppm	The product is screened to at least 1000ppm and the manufacturer has provided a publicly available inventory within this document. See chapter "Constituent Materials" for documentation.	1 point
X08 Materials Optimization	Our product does not participate in any of the listed programs for this requirement. It does not contribute to achieve points.		0 points

BREEAM International New Construction Version 6.0

EGGER Laminates is compliant with the preconditions for use in BREEAM v6.0 certified building and fulfills the emission requirements at exemplary level. Beyond that the usage of this product may contribute to gather additional points within the BREEAM scoring system. As the actually achievable number of points depends on the attributes of all used materials in the building project and further actions by the constructor, we cannot guarantee to obtain the maximum score.

For full requirement terms please see [BREEAM | Sustainable Building Certification](#)

The following table shows all BREEAM features which are applicable to the usage of our product.

Please note that reworking or manipulating the product (e. g. milling, sanding, drilling, coating or lacquering) may invalidate the applicability of the following table.

Concept	Feature and Description	Product Contribution	Maximum Credits
Hea 02 Indoor Air Quality	Avoidance of asbestos	The product complies with this prerequisite. See <u>Manufacturer Declaration – Asbestos</u> as evidence.	Prerequisite
	Minimizing sources of air pollution – Emissions from building products Exemplary level emission criteria ≤ Formaldehyde 0.01 mg/m³ ≤ TVOC 0.3 mg/m³ ≤ TSVOC 0.1 mg/m³ - Category 1A and 1B carcinogens 0.001 mg/m³	Product meets the exemplary level emissions criteria. Use <u>TÜV PROFiCERT - product Interior certificate</u> as evidence document.	2 Credits
Mat 01 Life Cycle Impacts	Environmental Product Declarations Products installed by Post-Construction Stage are covered with verified EPD	The product has a verified <u>Environmental Product Declaration (EPD)</u> according to ISO 14025 and EN 15804 + A2	1 Credit

Mat 03 Responsible Sourcing of Construction Products	All timber based products used on the projects are legally harvested and traded timber.	The product is verified by the <u>ISO 38200:2018</u> statements. Additionally, the product can be purchased in other 3 rd party certified qualities on request , e.g. PEFC. Use delivery receipt as evidence. See chapter " <u>Wood Origin</u> " for further information.	Prerequisite
--	--	---	--------------

Compliance with DGNB System Version 2023 International – New Buildings Criteria Set

The DGNB Silver, Gold and Platinum ratings result from the overall level of fulfillment of the building project. Which quality levels EGGER Laminates fulfills according to the DGNB system and the required verifications are listed in the following table. The contributions to the overall degree of fulfillment resulting from this according to the DGNB point system depend, among other things, on the relevance of the product group for the overall building. We can therefore not guarantee a score to be obtained through the use of EGGER Laminates.

Please note that other criteria are also relevant for the overall rating of the building.

For full requirement terms please see [German Sustainable Building Council | DGNB](#)

Please note that reworking or manipulating the product (e. g. milling, sanding, drilling, coating or lacquering) may invalidate the applicability of the following table.

Category	Credit Name and Description	Product Contribution	Quality Level
ENV 1.1 Climate Action and Energy	The Building life cycle assessment requires building material data.	The product has a verified <u>Environmental Product Declaration</u> according to ISO 14025 and EN 15804 + A2	General requirement
ENV 1.2 Local Environmental Impact	No chemical wood preservative in the interior.	The product complies with this criterion. Use <u>Manufacturer Declaration Wood Preservatives</u> as evidence.	General requirement
	Only product with SVHC ≤ 0.1% used	The product complies with this criterion. See chapter " <u>Constituent Materials</u> " for further information Use <u>Manufacturer Declaration REACH</u> as evidence.	General requirement
	Criteria matrix No. 47 – coated and uncoated wood based materials: Particle board, blockboard, veneer panels, fiberboard QS4: ▪ DE-UZ 76 or ▪ Formaldehyde ≤ 0.08 ppm	The product complies with these criteria. Use <u>TÜV PROFiCERT-product Interior certificate</u> as evidence.	4
	Criteria matrix No. 47c – Wood-based materials for floor coverings: MMFs with wood materials QS4: ▪ DE-UZ 176 or ▪ Formaldehyde ≤ 0.05 ppm	The product complies with these criteria. Use <u>TÜV PROFiCERT-product Interior certificate</u> as evidence.	4

ENV 1.3 Sustainable Resource Extraction	It must be demonstrated that at least 50% (by mass) of the permanently installed wood or wood-based materials originate from certified sustainably managed sources.	The product is verified by the <u>ISO 38200:2018</u> statements. Additionally, the product can be purchased in other 3 rd party certified qualities on request , e.g. PEFC. Use delivery receipt as evidence. See chapter " <u>Wood Origin</u> " for further information.	General requirement
TEC 1.6 Circular Construction	ZE01: Contained hazardous substances The product contains SVHC substances >0.1 mass %	See chapter " <u>Constituent Materials</u> " for further information. Use Manufacturer Declaration REACH as evidence	
	ZE02: Post-consumer recycled content	This product contains no recycled content.	
	ZE04: Proportion of renewable raw materials	See chapter " <u>Constituent Materials</u> " for further information. Use " <u>Manufacturer Declaration on Timber Origin</u> " as source document.	
	ZE05: Biodegradability	The product is not biodegradable.	0 points
	ZE03, ZE06-ZE09	The application of these credits depend heavily on the product use. In case of doubt, please contact your sales person for additional documents.	

Compliance with Sustainable Building Certification – QNG (Qualitätssiegel nachhaltiges Gebäude)

EGGER Laminates fulfills the requirements placed on construction products according to the QNG Sustainable Building Certification guidelines. As the actually achievable number of points depends on the attributes of all used materials in the building project and further actions by the constructor, we cannot guarantee to obtain the maximum score.
Please note that other criteria are also relevant for the overall rating of the building.
The QNG guidelines are currently only available in German.

Please note that reworking or manipulating the product (e. g. milling, sanding, drilling, coating or lacquering) may invalidate the applicability of the following table.

Category	Credit Name and Description	Product Contribution
Anlage 3: Gebäudeanforderungen	ANF1: Treibhausgas und Primärenergie ▪ Berechnung Treibhausgasemissionen im Gebäudelebenszyklus maximal 24kg CO ₂ Äqu/m ² a	The product has a verified <u>Environmental Product Declaration</u> (EPD) according to ISO 14025 and EN 15804 + A2.
	ANF2: Nachhaltige Materialgewinnung ▪ Mindestens 50% der neu eingebaute Hölzer/Holzprodukte und/oder Holzwerkstoffe stammen nachweislich aus nachhaltiger Forstwirtschaft	The product is verified by the <u>ISO 38200:2018</u> statements. Additionally, the product can be purchased in other 3 rd party certified qualities on request , e.g. PEFC. Use delivery receipt as evidence. See chapter " <u>Wood Origin</u> " for further information.

Anhang 3.1.3: Schadstoff- vermeidung in Bauprodukten	1.1 Übergreifende Anforderung für die Güte des Gebäudes Produktokumentation und Deklaration enthaltener SVHC >0,10 %	The product complies with these criteria. See chapter “ <u>Constituent Materials</u> ” for further information Use <u>Manufacturer Declaration REACH</u> as evidence.
	8. Imprägnierungen zum Zweck des chemischen Holzschutzes In Innenräumen keine Biozide zugelassen	The product complies with these criteria. Use <u>Manufacturer Declaration on Biocides</u> as evidence.
	9.1 & 9.2 Holzwerkstoffe für den Holzbau und Innenausbau - Einhaltung AgBB-Schema - Formaldehyd ≤ 0,08 ppm - Reproduktionstoxische Borverbindungen ≤ 0,10%	The product complies with these criteria. See chapter “ <u>Constituent Materials</u> ” for further information. Use <u>TÜV PROFiCERT-product Interior – certificate</u> and <u>Manufacturer Declaration REACH</u> as evidence.

Compliance with CAM Italy – Minimal Environmental Criteria for Buildings and Interior Furnishing (Mindestumweltkriterien für Gebäude und Inneneinrichtungen)

The product fulfills the requirements placed on construction products according to the *Mindestumweltkriterien für Gebäude*. The *Mindestumweltkriterien für Gebäude* are currently only available in German and Italian. The analysis is based on the *Ministerialdekret 23. Juni 2022*.

For further information, please go to [Autonome Provinz Bozen - Website und Hinweise - Rechtsvorschriften](#)

Please note that reworking or manipulating the product (e. g. milling, sanding, drilling, coating or lacquering) may invalidate the applicability of the following table.

Number	Credit name and Description	Product Contribution
2.5.1 & 3.2.8	Emissionen in geschlossenen Räumen (Luftverschmutzung in Innenräumen) - VOC gesamt (28d) <1500 µg/m³ - Formaldehyd (28d) <60 µg/m³ Belohnende Punktezahl: - VOC gesamt (28d) <1000 µg/m³ - Formaldehyd (28d) <10 µg/m³ Nachweis: AgBB (Deutschland)	Product meets the emissions criteria. Use <u>TÜV PROFiCERT - product Interior certificate</u> as evidence document.
2.5.6	Holzprodukte Alle im Rahmen des Projekts verwendeten Holzprodukte müssen gemäß den Angaben unter Punkt „a“ des Nachweises aus nachhaltig bewirtschafteten Wäldern stammen.	The product is verified by the <u>ISO 38200:2018</u> statements. Additionally, the product can be purchased in other 3 rd party certified qualities on request , e.g. PEFC. Use delivery receipt as evidence. See chapter “ <u>Wood Origin</u> ” for further information.
4.3.4	Nachwachsende Rohstoffe	The product can contribute to this criterion via this document.

Additionally, the product fulfills the requirements placed on interior furnishing according to the *Mindestumweltkriterien für die Lieferung neuer Inneneinrichtungen* (only available in German and Italian, analysis is based on the *Ministerialdekret 23. Juni 2022*). For further information, please go to [Autonome Provinz Bozen - Website und Hinweise - Rechtsvorschriften](#).

Please note that reworking or manipulating the product (e. g. milling, sanding, drilling, coating or lacquering) may invalidate the applicability of the following table.

Number	Credit name and Description	Product Contribution
4.1.2	Schadstoffe in Platten aus recyceltem Holz Prüfberichte gemäß den Verfahren laut Anlage A zum „EPF Standard for Delivery Conditions of Recycled Wood“ (2002)	Data concerning these criteria is only available on request. This product contains no recycled content.
4.1.3	Formaldehyd-Emissionen aus Platten "Die Formaldehyd-Emissionen fertiger Holzplatten müssen weniger als 50% des Werts der Klasse E1 gemäß Anhang B der Norm UNI EN 13986 betragen."	Product meets the emissions criteria. Use <u>TÜV PROFiCERT - product Interior certificate</u> as evidence document.
4.1.4	Emission flüchtiger organischer Verbindungen Die Emission flüchtiger organischer Verbindungen (TVOC) aus fertigen Erzeugnissen bzw. einem jeden der Materialien, der Bestandteile oder der Halbfertigerzeugnisse ≤ 500 µg/m ³ (nach EN 16516)	

Compliance with Nordic Swan

The Nordic Swan Ecolabel is a tool for evaluating environmental issues of constructing buildings. The requirements promote resource efficiency, reduced climate impact, a non-toxic circular economy and conservation of biodiversity. They also promote buildings with a good indoor climate and of high quality. The fact that the product has been declared in the Supply Chain Declaration Portal (SCDP) means that specific information about the product has been declared by EGGER. A product may not be used in a Nordic Swan Ecolabel-certified building, until it has been evaluated by an evaluator and appears in the "Declared Items" menu, in the declarant view of the SCDP portal.

Please note that reworking or manipulating the product (e.g. milling, sanding, drilling, coating or lacquering) may invalidate certificate applicability.

The product is a declared item in the Supply Chain Declaration Portal for Furniture and fitments generation 5.

The Swanen-ID for EGGER Laminates is 36001. It is valid for the following plants:

- Gifhorn, Germany
- St. Johann, Austria

Footnotes

Plant Addresses

Production Plant	Address
Gifhorn, DE	EGGER Kunststoffe GmbH & Co. KG, Im Weilandmoor 2, 38518 Gifhorn (DE)
St. Johann in Tirol, AT	FRITZ EGGER GmbH & Co. OG, Holzwerkstoffe, Weiberndorf 20, 6380 St. Johann in Tirol (AT)

List of Abbreviations

Abbreviation	Meaning
MMF	Melamine Formaldehyde Laminates
HPL	High Pressure Laminate
SVHC	Substance of Very High Concern
TSCA	Toxic Substances Control Act
HFR	Halogenated Flame Retardants
PFAS	Per- and Polyfluoroalkyl Substances
EPD	Environmental Product Declaration
GWP	Global Warming Potential
GWP-Luluc	Global Warming Potential - Land Use and Land Use Change
REACH	Regulation Concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals
VOC	Volatile Organic Compounds