



Geo6X SP GREEN KIT

Like red, even better in green

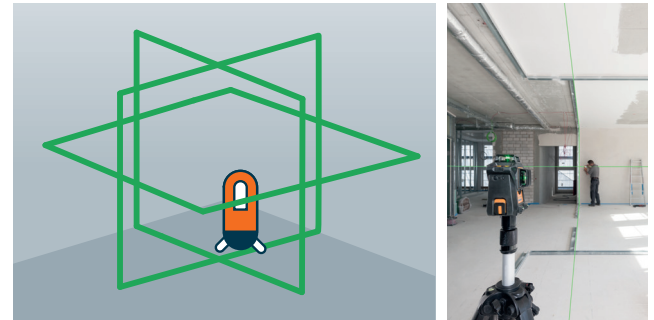

 **green laser**

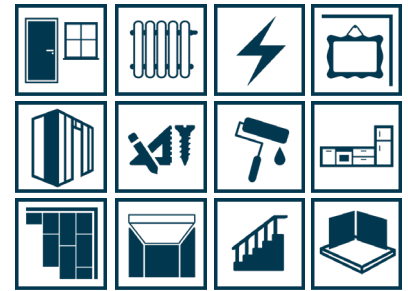

TECHNICAL DATA		GEO6X SP GREEN KIT	
Self-levelling range	± 3°	SUPPLIED WITH GEO6X SP GREEN KIT ART-NO. 534500 - Multi-functional mount - Li-ion battery, charger - Charger with USB 3.0 cable - Magnetic target - Battery case for alkaline batteries - Container - Multi-functional mount - magnets on the back - strap attachment - height adjustable 5/8" tripod connection	
Accuracy	± 2 mm / 10 m		
Laser diode / class	green / 2		
Working range* (radius)	40 m* (radius)		
Working range with receiver	70 m (radius)		
Operating time / power supply			
1 x 360°	14 h / Li-Ion		
2 x 360°	7 h / Li-Ion		
3 x 360°	5 h / Li-Ion		
Dust / water protection	IP 54		
Temperature range	-10 °C to +45 °C	OPTIONAL ART-NO. 500520 Receiver FR 55-M page 72	
Size	14 x 13 x 8 cm		
Weight (instrument with battery)	0,8 kg		
		ART-NO. 500510 Receiver FR 55 page 72	
		ART-NO. 257200 Receiver FR 75-MM page 72	
		ART-NO. 290560 Walltrack Adapter WS 1 page 124	