


SPIT CW6 - crocowood

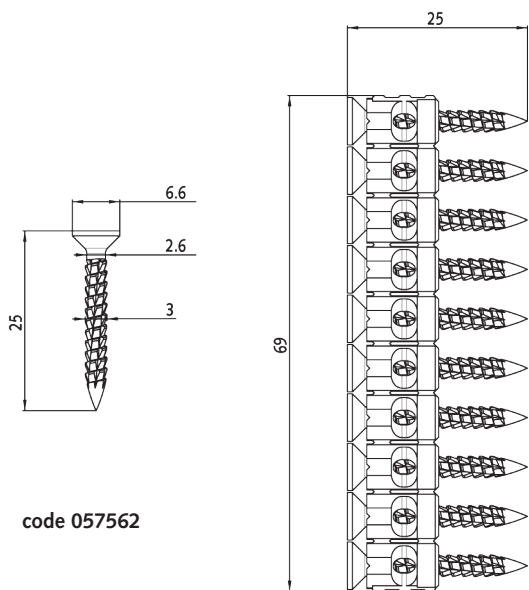

DESCRIPTION

- Metal suspension system to wood truss.
- Possibility to remove it, using Pozidrive print (PZ2).

PROPERTIES MATERIAL

Screw in carbon steel

- Countersunk head, PZ2
- Electrogalvanised, min zinc coating 5 μm
- Hardness: 500 N/mm² mini
- Without Chrome VI

TOOLS

P800P / P800P+

APPLICATION LIMIT

- Wooden structures, with minimum thickness 25 mm.
- No adapted for concrete base material.

RECOMMENDED LOAD

CW6 range	Tensile load		Shear load for a displacement of 1 mm
	N _{Rk} * (kN)	N _{Rec} * (kN)	V _{Rec} * (kN)
 Wooden plate, thickness 35 mm (pine wood)	0.46	0.15	0.10

* Indicative value