
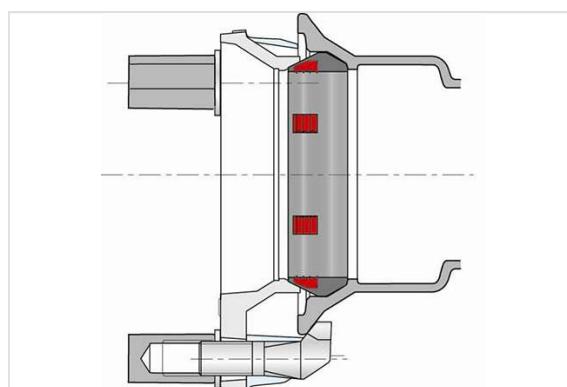


## Express New Vi Kit for Express Pipes and Fittings DN60–200

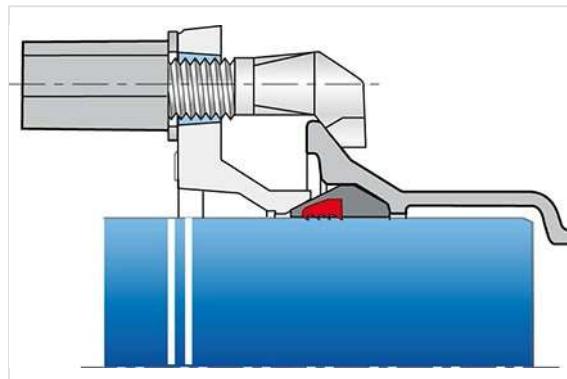

The Express New Vi Joint is a mechanical joint. The watertightness is made by the axial compression of an elastomer gasket (with inserts) thanks to a gland tightened with iron bolts and steel washers.

DN	Angular deflection	PFA	Mass	References
150 mm	5 °	16 bar	4.78 kg	JWB15LTT
200 mm	4 °	16 bar	10.22 kg	JWB20LTT

For all DN: kit components cannot be purchased separately


**Field of use:**

- For drinking water networks

**Main characteristics:**


- Elastomer quality: EPDM (EN 681-1)
- Coating of the gland: blue epoxy powder 250 µm conforming to EN14901-1
- Corrosion resistant iron bolts conforming to ISO 9 227
- Steel washers M20: red galvanized steel
- Kit complies with standard EN 545:2010 and ISO 2531:2009

## Accessories

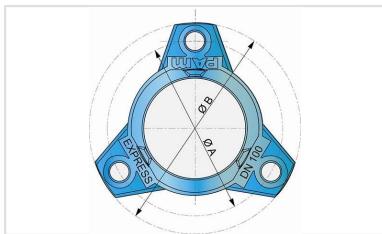


Express New Gland  
DN60-150


## Linked products

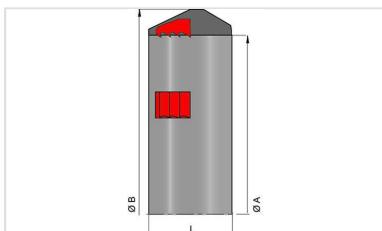

Express New Vi Gasket  
DN60-150

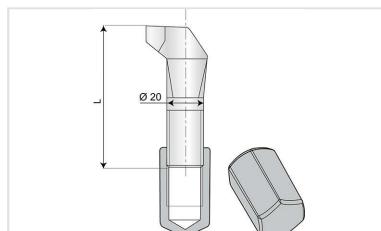

Express New Bolt

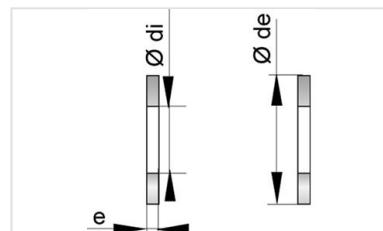

Washers M20 Zinc Coated

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*