

# Environmental Product Declaration

*according to ISO 14025 and EN 15804*



This declaration is for:

**AeroDek - Unique Plus P 0.42 mm**

Provided by:

**BMI AeroDek**



program operator

**Stichting MRPI®**

publisher

**Stichting MRPI®**

**[www.mrpi.nl](http://www.mrpi.nl)**

MRPI® registration

**1.1.00173.2021**

date of first issue

**01-03-2021**

date of this issue

**01-03-2021**

expiry date

**01-03-2026**



## COMPANY INFORMATION



BMI AeroDek  
Rue de Hermee, 186  
BE-4040  
Herstal, Belgium

wouterjan.vanden.berg@bmigroup.com  
www.bmigroup.com/nl

## PRODUCT

AeroDek - Unique Plus P 0.42 mm

## DECLARED UNIT/FUNCTIONAL UNIT

m<sup>2</sup>

## DESCRIPTION OF PRODUCT

A m<sup>2</sup> of a pitched steel roof, produced (cradle to gate LCA, only phase A1-A3)

## VISUAL PRODUCT



## MRPI® REGISTRATION

1.1.00173.2021

## DATE OF ISSUE

01-03-2021

## EXPIRY DATE

01-03-2026

## MORE INFORMATION

<https://www.bmigroup.com/be/producten/products/monier/aerodek-unique-plus-p>

## SCOPE OF DECLARATION

This MRPI®-EPD certificate is verified by **Kamiel Jansen, Primum**.

The LCA study has been done by **Mathias Ruinart de Brimont/Wouter Jan van den Berg, BMI Group**.

The certificate is based on an LCA-dossier according to ISO14025 and NEN-EN15804+A1. It is verified according to the 'EPD-MRPI® verification protocol May 2017.v3.1'. EPDs of construction products may not be comparable if they do not comply with NEN-EN15804+A1. Declaration of SVHC that are listed on the 'Candidate List of Substances of Very High Concern for authorisation' when content exceeds the limits for registration with ECHA.

## PROGRAM OPERATOR

Stichting MRPI®  
Kingsfordweg 151  
1043GR  
Amsterdam

ir. J-P den Hollander, Managing director MRPI®

## DEMONSTRATION OF VERIFICATION

CEN standard EN15804 serves as the core PCR[a]

Independent verification of the declaration and data,  
according to EN ISO 14025:2010:

internal: external: X

Third party verifier:

Kamiel Jansen, Primum

[a] PCR = Product Category Rules

## DETAILED PRODUCT DESCRIPTION

AeroDek Unique Plus is a lightweight steel tile combined of steel core, metallic coatings and a powder coating (coloured). The first step is to press the steel to have the proper profile then the metal sheet is cleaned/degreased and dried on the production line. After that, the powder coating is applied and finally cured in an oven.

The Reference Service Life (RSL) of the Aerodek- Unique Plus P 0.42 mm is 60 years.

COMPONENT (> 1%)	[kg / %]
Steel coil	confidential
Powder coating	confidential

(\*) > 1% of total mass

## SCOPE AND TYPE

The AeroDek steel tiles are produced at the location of BMI Herstal and they are applied at the European market.


The background database is Ecoinvent version 3.5. It is a specific EPD for a specific product and the type of this EPD is Cradle-to-Gate. The life cycle stages included are shown next.

PRODUCT STAGE			CONSTRUCTION			USE STAGE								END OF LIFE			BENEFITS AND	
			PROCESS											STAGE			LOADS BEYOND THE	
			STAGE														SYSTEM BOUNDARIES	
Raw material supply	Transport	Manufacturing	Transport gate to site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
X	X	X	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA		

X = Module assessed

MNA = Module not assessed

## LCA Processflow tile production

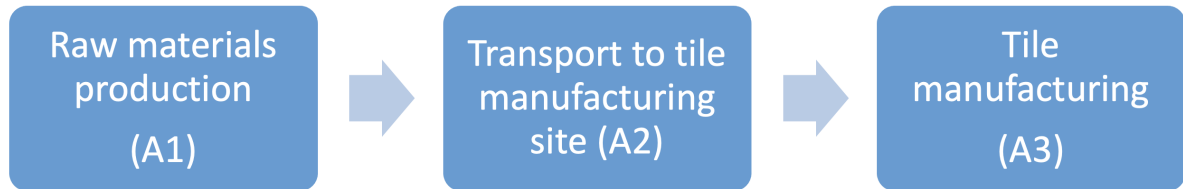

*Figure: LCA process diagram according to EN 15804(7.2.1)*

### REPRESENTATIVENESS

The input data are representative for AeroDek - Unique Plus P 0.42 mm, a product of BMI. The data are representative for the Netherlands.

## ENVIRONMENTAL IMPACT per functional unit or declared unit

	UNIT	A1	A2	A3	A1-A3
ADPE	kg Sb-eq.	6.65E-6	7.82E-8	1.96E-3	1.97E-3
ADPF	MJ	1.58E+2	4.28E-1	7.02E+1	2.29E+2
GWP	kg CO2-eq.	1.27E+1	2.75E-2	4.63E+0	1.74E+1
ODP	kg CFC11-eq.	4.43E-7	5.13E-9	4.54E-7	9.02E-7
POCP	kg ethene-eq.	7.78E-3	1.63E-5	3.64E-3	1.14E-2
AP	kg SO2-eq.	3.35E-2	1.19E-4	2.23E-2	5.59E-2
EP	kg (PO4)3--eq.	5.05E-3	2.40E-5	4.21E-3	9.28E-3

ADPE = Abiotic Depletion Potential for non-fossil resources

ADPF = Abiotic Depletion Potential for fossil resources

GWP = Global Warming Potential

ODP = Depletion potential of the stratospheric ozone layer

POCP = Formation potential of tropospheric ozone photochemical oxidants

AP = Acidification Potential of land and water

EP = Eutrophication Potential

## RESOURCE USE per functional unit or declared unit

	UNIT	A1	A2	A3	A1-A3
PERE	MJ	4.95E+0	0.00	4.03E+0	8.97E+0
PERM	MJ	0.00	0.00	0.00	0.00
PERT	MJ	1.76E+0	4.50E-3	2.02E+1	2.20E+1
PENRE	MJ	1.16E+2	0.00	5.64E+1	1.72E+2
PENRM	MJ	0.00	0.00	0.00	0.00
PENRT	MJ	1.36E+2	4.56E-1	8.15E+1	2.18E+2
SM	kg	4.03E-1	0.00	2.02E-3	4.05E-1
RSF	MJ	0.00	0.00	0.00	0.00
NRSF	MJ	0.00	0.00	0.00	0.00
FW	m3	9.51E-2	7.28E-5	6.39E-2	1.59E-1

PERE = Use of renewable energy excluding renewable primary energy resources

PERM = Use of renewable energy resources used as raw materials

PERT = Total use of renewable primary energy resources

PENRE = Use of non-renewable primary energy resources excluding non-renewable energy resources used as raw materials

PENRM = Use of non-renewable primary energy resources used as raw materials

PENRT = Total use of non-renewable primary energy resources

SM = Use of secondary materials

RSF = Use of renewable secondary fuels

NRSF = Use of non renewable secondary fuels

FW = Use of net fresh water

## OUTPUT FLOWS AND WASTE CATEGORIES per functional unit or declared unit

	UNIT	A1	A2	A3	A1-A3
HWD	kg	4.82E-4	2.73E-7	9.54E-4	1.44E-3
NHWD	kg	1.17E+0	2.61E-2	3.61E-1	1.56E+0
RWD	kg	3.48E-4	2.89E-6	2.90E-4	6.42E-4
CRU	kg	0.00	0.00	2.58E-3	2.58E-3
MFR	kg	0.00	0.00	1.87E-2	1.87E-2
MER	kg	0.00	0.00	0.00	0.00
EEE	MJ	0.00	0.00	4.24E-3	4.24E-3
ETE	MJ	0.00	0.00	7.30E-3	7.30E-3

HWD = Hazardous Waste Disposed

NHWD = Non Hazardous Waste Disposed

RWD = Radioactive Waste Disposed

CRU = Components for reuse

MFR = Materials for recycling

MER = Materials for energy recovery

EEE = Exported Electrical Energy

ETE = Exported Thermal Energy

## CALCULATION RULES

In the Life cycle assessment the following is included in this study: Production (A1-A3).

Modules A1-A3 of the AeroDek tiles production include the following:

- The provision of resources, additives, and energy;
- Transport of resources and additives to the production site;
- Production processes on-site including energy;
- Production of additives, disposal of production residues, and consideration of related emissions;
- Recycling of production/manufacturing scrap. Steel scrap is assumed to reach the end-of-waste status once it is shredded and sorted, thus becomes input to the product system in the inventory.

### Cut-off criteria

Measurement of on-site emissions were performed by BMI and those emissions were considered. The specific emissions that are linked to the provision of thermal and electrical energy are also considered in the specific processes. All reported data were incorporated and modelled using the best available LCI data. Data for the sites were cross-checked with one another to identify potential data gaps. No processes, materials or emissions that are known to make a significant contribution to the environmental impact of the studied products have been omitted. On this basis, there is no evidence to suggest that input or output contributing more than 1% to the overall mass or energy of the system - or that are environmentally significant - have been omitted.

#### Assumptions and approximations

In this study, primary data was used to model all on-site processes. This data was cross-checked to identify and eliminate data gaps. Secondary data (from the Ecoinvent database) was as technologically and geographically representative as possible.

#### Data quality

The foreground data collected by the manufacturer are based on yearly production amounts and extrapolations of measurements on specific machines and plants. The production data refer to the year 2019. Most of the necessary life cycle inventories for the basic materials are available in the Ecoinvent (v3.5) database.

### SCENARIOS AND ADDITIONAL TECHNICAL INFORMATION

In the Life cycle assessment the following is included in this study:

Product stage (A1-A3)

The production stage consists of the extraction of raw materials, transportation of the raw materials, processing the raw materials into materials and the production of the product. The required energy for production, external treatments, ancillary materials, packaging material and production emissions are included.

Transport Movement	Transport conveyance	Weight x distance [TKM]
Transport from suppliers and indirect suppliers to BMI	Multiple Transport Conveyances	0.59
Transport to external treatment	Multiple Transport Conveyances	0.05

### DECLARATION OF SVHC

None of the substances contained in the product are listed in the "Candidate List of Substances of Very High Concern for authorisation", or they do not exceed the threshold with the European Chemicals Agency.

### REFERENCES

ISO 14040

- DIN EN ISO 14040:2006-10, Environmental management - Life cycle assessment - Principles and framework; EN ISO 14040:2006

ISO 14044

- DIN EN ISO 14044:2006-10, Environmental management - Life cycle assessment - Requirements and guidelines; EN ISO 14040:2006

ISO 14025

- DIN EN ISO 14025:2011-10: Environmental labels and declarations — Type III environmental declarations — Principles and procedures

EN 15804

- EN 15804:2012-04+A1 2013: Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products

### REMARKS

None