

Declaration of performance (DOP)

No. 9174 001 DOP 2013-06-17

1. Unique identification code of the product-type:

Multi-wall chimney system type DW-FU according to EN 1856-1:2009

2. Type, batch or serial number or any other element allowing identification of the construction product as required under Article 11(4):

Double wall chimney system Typ DW-FU with 32 mm heat insulation¹⁾

Model 1	DN (80- 300) T400 – N1 – D – V3 – L50060 – G50
Model 1	DN (350- 450) T400 – N1 – D – V3 – L50060 – G75
Model 1	DN (500- 600) T400 – N1 – D – V3 – L50060 – G100
Model 1	DN (650-1000) T400 – N1 – D – V3 – L50060 – G200
Model 2	DN (80- 300) T400 – N1 – W – V2 – L50060 – O20
Model 2	DN (350- 450) T400 – N1 – W – V2 – L50060 – O30
Model 2	DN (500- 600) T400 – N1 – W – V2 – L50060 – O40
Model 2	DN (650-1000) T400 – N1 – W – V2 – L50060 – O80
Model 3	DN (80- 300) T600 – N1 – D – V3 – L50060 – G50
Model 3	DN (350- 450) T600 – N1 – D – V3 – L50060 – G75
Model 3	DN (500- 600) T600 – N1 – D – V3 – L50060 – G100
Model 3	DN (650-1000) T600 – N1 – D – V3 – L50060 – G200
Model 4	DN (80- 300) T600 – N1 – W – V2 – L50060 – O50
Model 4	DN (350- 450) T600 – N1 – W – V2 – L50060 – O75
Model 4	DN (500- 600) T600 – N1 – W – V2 – L50060 – O100
Model 4	DN (650-1000) T600 – N1 – W – V2 – L50060 – O200

¹⁾ Manufacturer product identification.

3. Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer:

Convey the products of combustion from heating appliances to the outside atmosphere

4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required under Article 11(5):

Jeremias GmbH
Opfenrieder Straße 11-14
DE-91717 Wassertrüdingen
Phone: +49 9832 68 68 0
Fax: +49 9832 68 68 68
Email: info@jeremias.de

5. Where applicable, name and contact address of the authorised representative whose mandate covers the tasks specified in Article 12(2):

not applicable

6. System or systems of assessment and verification of constancy of performance of the construction product as set out in CPR, Annex V:

System 2+ and System 4

7. In case of the declaration of performance concerning a construction product for which a European Technical Assessment has been issued:

Notified factory production control certification body no. 0036 performed the initial inspection of the manufacturing plant and of factory production control and the continuous surveillance, assessment and evaluation of factory production control and issued the certificate of conformity 0036 CPD 9174 001 of the factory production control.

8. Declared performance:

	Essential Characteristics	Performance	Harmonized technical specification																								
8.1	Compressive strength Chimney sections, fittings and supports	<u>Sections and fittings:</u> Model 1 DN (80- 300): up to 38 m Model 1 DN (350- 450): up to 32 m Model 1 DN (500- 600): up to 21 m Model 1 DN (650-1000): up to 9 m Model 2 DN (80- 300): up to 38 m Model 2 DN (350- 450): up to 32 m Model 2 DN (500- 600): up to 21 m Model 2 DN (650-1000): up to 9 m Model 3 DN (80- 300): up to 38 m Model 3 DN (350- 450): up to 32 m Model 3 DN (500- 600): up to 21 m Model 3 DN (650-1000): up to 9 m Model 4 DN (80- 300): up to 38 m Model 4 DN (350- 450): up to 32 m Model 4 DN (500- 600): up to 21 m Model 4 DN (650-1000): up to 9 m <u>Supports:</u> n.p.d For further information see the installation instruction DW-FU.	EN 1856-1:2009																								
8.2	Resistance to fire	(Resistance to fire from inside to outside) Model 1 DN (80- 300): T400 – G50 Model 1 DN (350- 450): T400 – G75 Model 1 DN (500- 600): T400 – G100 Model 1 DN (650-1000): T400 – G200 Model 2 DN (80- 300): T400 – O20 Model 2 DN (350- 450): T400 – O30 Model 2 DN (500- 600): T400 – O40 Model 2 DN (650-1000): T400 – O80 Model 3 DN (80- 300): T600 – G50 Model 3 DN (350- 450): T600 – G75 Model 3 DN (500- 600): T600 – G100 Model 3 DN (650-1000): T600 – G200 Model 4 DN (80- 300): T600 – O50 Model 4 DN (350- 450): T600 – O75 Model 4 DN (500- 600): T600 – O100 Model 4 DN (650-1000): T600 – O200 Tested without cover, with back ventilated ceiling duct.	EN 1856-1:2009																								
8.3	Gas tightness/leakage	Model 1 to 4 DN (80-1000): N1	EN 1856-1:2009																								
8.4	Flow resistance of chimney sections, fittings and terminals	According to EN 13384-1 <table><tr><th>component:</th><th>ζ (Zeta-value) single resistances</th></tr><tr><td>pipe tee 87°:</td><td>1,14</td></tr><tr><td>pipe tee 45°:</td><td>0,35</td></tr><tr><td>pipe bend 87°:</td><td>0,40</td></tr><tr><td>pipe bend 45°:</td><td>0,28</td></tr><tr><td>pipe bend 30°:</td><td>0,20</td></tr><tr><td>pipe bend 15°:</td><td>0,10</td></tr><tr><td colspan="2">Terminals: (only for operation in negative pressure)</td></tr><tr><td>rain cap</td><td>1,0</td></tr><tr><td>fin cap type „Hubo“:</td><td>≤ Ø 140 mm 0,1/ ≥ Ø 150</td></tr><tr><td>wind deflector:</td><td>≤ Ø 140 mm 0,1/ ≥ Ø 150</td></tr><tr><td>hurrican:</td><td>0,1</td></tr></table>	component:	ζ (Zeta-value) single resistances	pipe tee 87°:	1,14	pipe tee 45°:	0,35	pipe bend 87°:	0,40	pipe bend 45°:	0,28	pipe bend 30°:	0,20	pipe bend 15°:	0,10	Terminals: (only for operation in negative pressure)		rain cap	1,0	fin cap type „Hubo“:	≤ Ø 140 mm 0,1/ ≥ Ø 150	wind deflector:	≤ Ø 140 mm 0,1/ ≥ Ø 150	hurrican:	0,1	EN 1856-1:2009
component:	ζ (Zeta-value) single resistances																										
pipe tee 87°:	1,14																										
pipe tee 45°:	0,35																										
pipe bend 87°:	0,40																										
pipe bend 45°:	0,28																										
pipe bend 30°:	0,20																										
pipe bend 15°:	0,10																										
Terminals: (only for operation in negative pressure)																											
rain cap	1,0																										
fin cap type „Hubo“:	≤ Ø 140 mm 0,1/ ≥ Ø 150																										
wind deflector:	≤ Ø 140 mm 0,1/ ≥ Ø 150																										
hurrican:	0,1																										
8.5	Thermal resistance	Model 1 to 4 DN (80-1000): 0,501 m²K/W tested at 200°C	EN 1856-1:2009																								

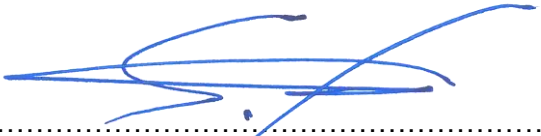
8. Declared performance:

	Essential Characteristics	Performance	Harmonized technical specification
8.6	Thermal shock resistance Sootfire resistance	Model 1 DN (80-1000): Yes Model 2 DN (80-1000): No ²⁾ Model 3 DN (80-1000): Yes Model 4 DN (80-1000): No ²⁾ ²⁾ Because designated O	EN 1856-1:2009
8.7	Thermal performance under normal operating conditions	Model 1 DN (80-1000): T400 Model 2 DN (80-1000): T400 Model 3 DN (80-1000): T600 Model 4 DN (80-1000): T600	
8.8	Flexural tensile strength (only for means of connection for chimney sections and fittings)	Model 1 DN (80- 300): up to 16 m Model 1 DN (350- 450): up to 13 m Model 1 DN (500- 600): up to 13 m Model 1 DN (650-1000): n.p.d. Model 2 DN (80- 300): up to 16 m Model 2 DN (350- 450): up to 13 m Model 2 DN (500- 600): up to 13 m Model 2 DN (650-1000): n.p.d. Model 3 DN (80- 300): up to 16 m Model 3 DN (350- 450): up to 13 m Model 3 DN (500- 600): up to 13 m Model 3 DN (650-1000): n.p.d. Model 4 DN (80- 300): up to 16 m Model 4 DN (350- 450): up to 13 m Model 4 DN (500- 600): up to 13 m Model 4 DN (650-1000): n.p.d.	EN 1856-1:2009
8.9	Non vertical installation	Model 1 to 4 DN (80-1000): Maximum offset between supports 3 m at 90° (inclined run, maximum distance between two fixations, supports at non vertical installation)	EN 1856-1:2009
8.10	Components subject to wind load	Model 1 to 4 DN (80- 600): Free standing height 3 m above last support. Maximum spacing between lateral supports: 4 m. Model 1 to 4 DN (650-1000): Free standing height 1,5 m above last support. Maximum spacing between lateral supports: 4 m.	EN 1856-1:2009
8.11	Durability: Water and vapour diffusion resistance	Model 1 DN (80-1000): No Model 2 DN (80-1000): Yes Model 3 DN (80-1000): No Model 4 DN (80-1000): Yes	EN 1856-1:2009
8.12	Condensate penetration resistance	Model 1 DN (80-1000): No Model 2 DN (80-1000): Yes Model 3 DN (80-1000): No Model 4 DN (80-1000): Yes	
8.13	Against corrosion	Model 1 DN (80-1000): V3 Model 2 DN (80-1000): V2 Model 3 DN (80-1000): V3 Model 4 DN (80-1000): V2	
8.14	Freeze thaw resistance	Model 1 to 4 DN (80-1000): Yes	

9. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 8. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Wassertrüdingen, 17th June 2013


.....
Stefan Engelhardt CEO

Product information

“Chimneys - Requirements for metal chimneys - Part 1:
System chimney products” DIN EN 1856-1:2009

Manufacturer's identification:

jeremias GmbH
Opfenrieder Str. 11-14
91717 Wassertrüdingen
Phone.: +49 (0) 9832 / 68 68-50
Fax: +49 (0) 9832 / 68 68-68
Internet: www.jeremias.de
Email: info@jeremias.de

Product trade name:

DW-FU (Double wall chimney system with 32 mm heat insulation)

Certification office:

TÜV SÜD Industrie Service GmbH

Name and position of the responsible person:

Stefan Engelhardt CEO



Identification of accompanying documentation

0.1	Metal chimney	EN 1856-1	T400	N1	D	V3-L50060	G50 G75 G100 G200	80 – 300 350 – 450 500 – 600 650 – 1000	Double wall chimney system, sootfire resistant, with 32 mm heat insulation, ventilated throughout the whole length, without covering. Operation mode in negative pressure.
0.2	Metal chimney	EN 1856-1	T400	N1	W	V2-L50060	O20 O30 O40 O80	80 – 300 350 – 450 500 – 600 650 – 1000	Double wall chimney system, moisture resistant, with 32 mm heat insulation, ventilated throughout the whole length, without covering. Operation mode in negative pressure.
0.3	Metal chimney	EN 1856-1	T600	N1	D	V3-L50060	G50 G75 G100 G200	80 – 300 350 – 450 500 – 600 650 – 1000	Double wall chimney system, sootfire resistant, with 32 mm heat insulation, ventilated throughout the whole length, without covering. Operation mode in negative pressure.
0.4	Metal chimney	EN 1856-1	T600	N1	W	V2-L50060	O50 O75 O100 O200	80 – 300 350 – 450 500 – 600 650 – 1000	Double wall chimney system, moisture resistant, with 32 mm heat insulation, ventilated throughout the whole length, without covering. Operation mode in negative pressure.

Product description

Standard number

Temperature level

Pressure level

Condensate resistance
(W: wet / D: dry)

Corrosion resistance

Flue liner material
specification

Sootfire resistance
(G: yes / O: no) and
distance to combustible
material (in mm)

Nominal diameter (Ø)
(inner tube) in mm

Properties of a multi-wall metal chimney system

Compressive strength:

Maximum load (see encl. H-1 Installing instructions)

Flow resistance:

Average roughness: 1,0 mm, Zeta-values according to DIN EN 13384-1 (see encl. H-1 Installing instructions)

Thermal resistance: 0,501 m²K/W

Flexural strength:

Angular assembly: Maximum length between two supports:
3 m at 90°

Tensile strength:

See encl. H-1 Installing instructions

Wind load: free standing end above last fixation:

≤ 3 m up to Ø600 mm (see encl. H-1 Installing instructions)
≤ 1,5 m Ø650 – Ø1000mm (see encl. H-1 Installing instructions)

Maximum distance between vertical supports: 4 m

Freeze-thaw resistance: Yes

Cleaning:

The chimney system is only allowed to be cleaned with cleaning devices made of plastic or rust-resistant stainless steel.